


# RF CABLE ASSEMBLY "MIX & MATCH" \$9.95 EA TO 36" LONG

(Add \$3.00 for N CONNECTOR) (Add \$3.00 for RD-316 DOUBLE SHIELDED)

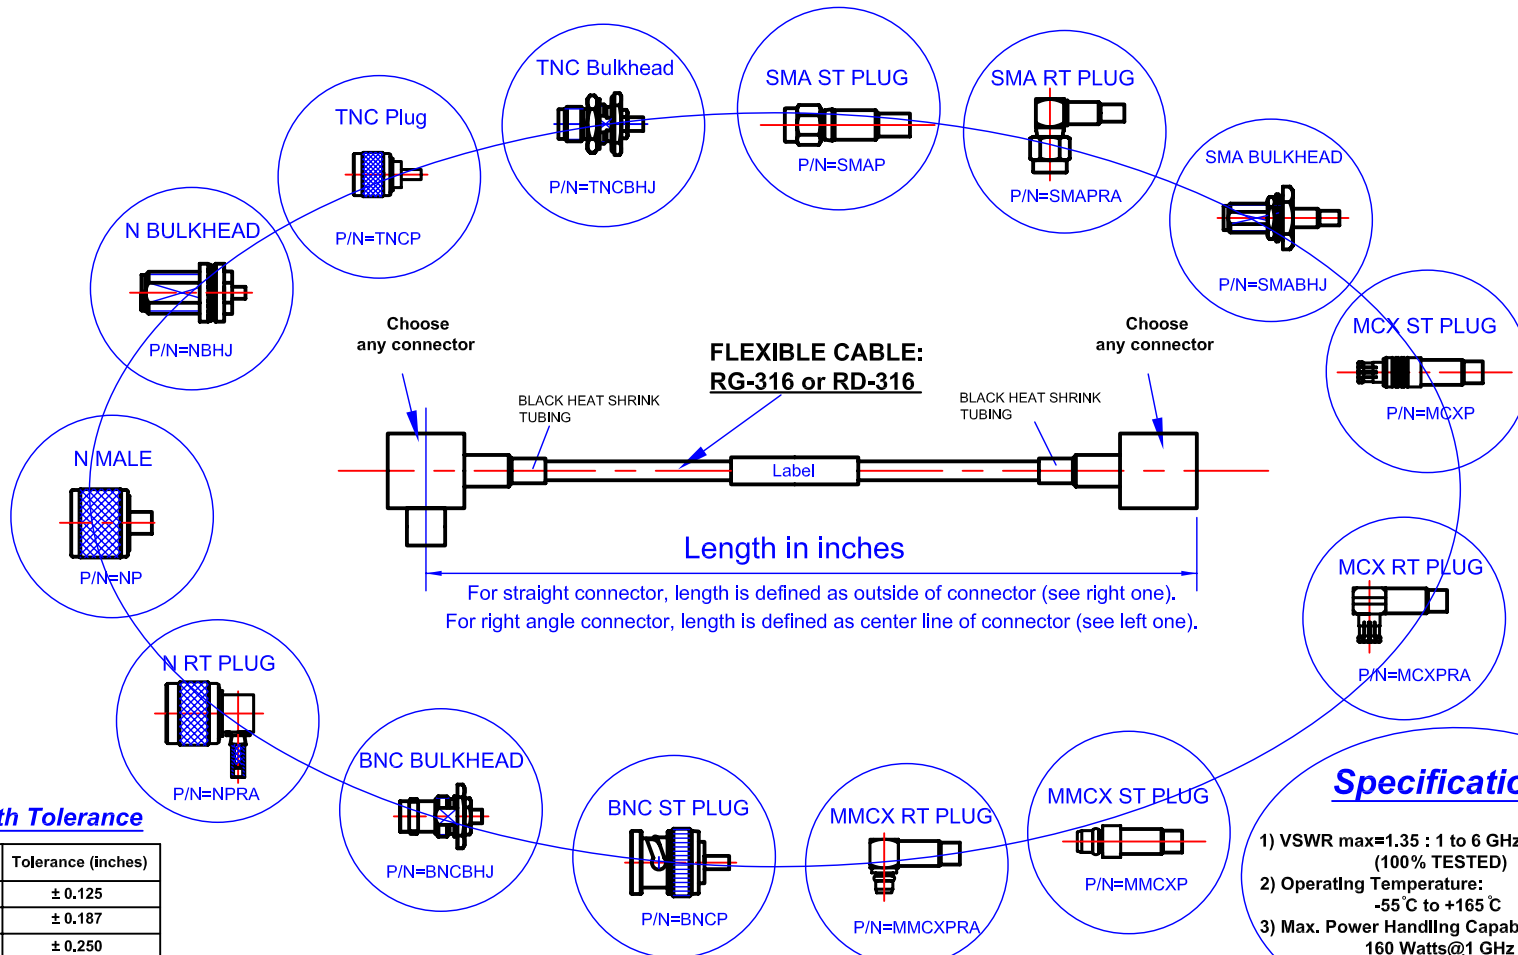

### Length Tolerance

L (inches)	Tolerance (inches)
3 - 5.9	± 0.125
6 - 11.9	± 0.187
12 - 23.9	± 0.250
24 - 36.0	± 0.313
> 36	contact P1dB

### Specifications

- 1) VSWR max=1.35 : 1 to 6 GHz\* (100% TESTED)
- 2) Operating Temperature: -55°C to +165°C
- 3) Max. Power Handling Capability of RG316: 160 Watts@1 GHz

To Order Use the Following P/N: P1- \_\_\_\_\_ / \_\_\_\_\_ -R\_\_ 316- \_\_\_\_\_  
connector#1 connector#2 length in inches

### Contact :

**P1dB EXCLUSIVE DISTRIBUTOR**

RFMW, LTD. San Jose, CA [sales@RFMW.com](mailto:sales@RFMW.com)

Tel: (408) 414 - 1450 or (877) 367 - 7369

### Note:

- 1) For SMA, TNC, BNC, please add "RP" in front of part number for Reverse-Polarity, e.g. RPSMAP=RP SMA Plug
- 2) N, TNC, BNC, RPSMA, RPTNC, RPBNC connector only rated to 3 GHz

**P1dB**