

# 6 GHz WiFi 6E Coexistence BAW Filter

# A10160

## Description


Akoustis’ A10160 is a high-performance, ultra-wide bandwidth BAW RF Filter for use in WiFi 6E applications covering portions of U-NII-5 band. A10160 utilizes Akoustis’ patented XBAW® technology which provides leading RF filter performance. This BAW RF filter provides low insertion loss and meets the stringent rejection requirements enabling coexistence with U-NII-1 thru 4. This device exhibits high-power handling capabilities necessary for demanding power requirements of the latest WiFi 6E standards. A10160 uses standard laminate packaging and is compatible with high volume, lead-free SMT soldering processes.

- Small form factor 3.5mm x 3.5mm x 0.76mm
- Single-ended Tx/Rx ports.
- Passband covering 160 MHz
- High rejection enables coexistence with adjacent WiFi UNII bands
- High power rating, maximum +27dBm
- Low insertion loss bandpass filter
- Performance over -20 C to +95C
- RoHS compliant, Pb-free package

## Applications

- WiFi 6E tri band routers, integrated cable modem
- WiFi 6E tri band access points
- LTE/LAA small cells

## Functional Block Diagram

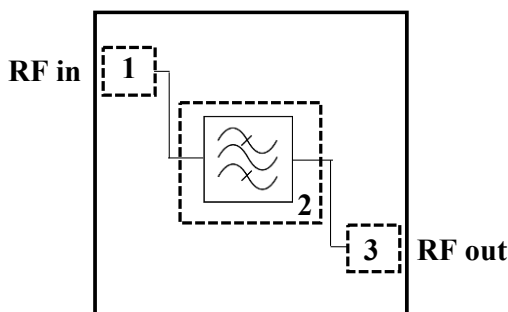

| Pin # | Description |
|-------|-------------|
| 1     | RF Input    |
| 2     | Ground      |
| 3     | RF Output   |

## Ordering Information

| Part Number | Description                   |
|-------------|-------------------------------|
| A10160EVB   | Evaluation board              |
| A10160SP    | (5) Loose pcs                 |
| A10160SR    | (100) Short Reel (7" Reel)    |
| A10160TR1   | (1000) Tape & Reel (7" Reel)  |
| A10160TR2   | (2500) Tape & Reel (13" Reel) |

## Absolute Maximum Ratings

| Parameter           | Conditions                          | Rating        |
|---------------------|-------------------------------------|---------------|
| Storage Temperature |                                     | -40 to 125 °C |
| Max Input Power     | Signal: OFDM MCS0, 160MHz, PAR 10dB | +28 dBm       |
| Max Temperature     |                                     | -40 to 105°C  |

Exceeding any one limit or a combination of AMR conditions may result in damage to the device.

## Operating Parameters (Temp = 25°C unless otherwise noted)

| Parameter           | Conditions                     | Units | Min. | Typ.               | Max.               |
|---------------------|--------------------------------|-------|------|--------------------|--------------------|
| Passband            |                                | MHz   | 5945 | 6025               | 6105               |
| Insertion Loss      | 5945 – 5965 MHz                | dB    |      | 3.2 <sup>(2)</sup> | 3.8 <sup>(2)</sup> |
|                     | 5965 – 6105 MHz                | dB    |      | 1.7 <sup>(1)</sup> | 2.3 <sup>(2)</sup> |
| Amplitude Variation | 5945 – 6105 MHz                | dB    |      | 2.5 <sup>(2)</sup> | 3.0 <sup>(2)</sup> |
| Attenuation         | 30 – 2700 MHz                  | dB    | 36   | 39                 |                    |
|                     | 3300 – 4200 MHz                | dB    | 33   | 36                 |                    |
|                     | 4200 – 4900 MHz                | dB    | 33   | 36                 |                    |
|                     | 5170 – 5330 MHz                | dB    | 38   | 39                 |                    |
|                     | 5330 – 5490 MHz                | dB    | 39   | 41                 |                    |
|                     | 5490 – 5730 MHz                | dB    | 41   | 45                 |                    |
|                     | 5735 – 5795 MHz                | dB    | 51   | 53                 |                    |
|                     | 5795 – 5835 MHz                | dB    | 60   | 62                 |                    |
| 5835 – 5895 MHz     | dB                             | 55    | 58   |                    |                    |
| Return Loss         | 5945 – 6105 MHz                |       | 12   | 17 <sup>(1)</sup>  |                    |
| Load Impedance      |                                | Ω     |      | 50                 |                    |
| Power Handling      | OFDM MCS0, 160MHz,<br>PAR 10dB | dBm   |      |                    | 27                 |

Note:

1. Averaged over specified frequency at room temperature
2. Averaged over 20MHz channel


## Operating Parameters (Temp = -20°C to 95 °C unless otherwise noted)

| Parameter                  | Conditions                     | Units | Min. | Typ.               | Max.               |
|----------------------------|--------------------------------|-------|------|--------------------|--------------------|
| <b>Passband</b>            |                                | MHz   | 5945 | 6025               | 6105               |
| <b>Insertion Loss</b>      | 5945 – 5965 MHz                | dB    |      | 3.2 <sup>(2)</sup> | 3.8 <sup>(2)</sup> |
|                            |                                |       |      |                    | 4.2 <sup>(3)</sup> |
|                            | 5965 – 6105 MHz                | dB    |      | 1.7 <sup>(1)</sup> | 2.3 <sup>(2)</sup> |
|                            |                                |       |      |                    | 2.5 <sup>(3)</sup> |
| <b>Amplitude Variation</b> | 5945 – 6105 MHz                | dB    |      | 2.5 <sup>(2)</sup> | 3.2 <sup>(2)</sup> |
| <b>Attenuation</b>         | 30 – 2700 MHz                  | dB    | 36   | 39                 |                    |
|                            | 3300 – 4200 MHz                | dB    | 33   | 36                 |                    |
|                            | 4200 – 4900 MHz                | dB    | 33   | 36                 |                    |
|                            | 5170 – 5330 MHz                | dB    | 38   | 39                 |                    |
|                            | 5330 – 5490 MHz                | dB    | 39   | 41                 |                    |
|                            | 5490 – 5730 MHz                | dB    | 40   | 45                 |                    |
|                            | 5735 – 5795 MHz                | dB    | 51   | 53                 |                    |
|                            | 5795 – 5835 MHz                | dB    | 60   | 62                 |                    |
|                            | 5835 – 5895 MHz                | dB    | 52   | 58                 |                    |
| <b>Return Loss</b>         | 5945 – 6105 MHz                |       | 12   | 17 <sup>(1)</sup>  |                    |
| <b>Load Impedance</b>      |                                | Ω     |      | 50                 |                    |
| <b>Power Handling:</b>     | OFDM MCS0, 160MHz,<br>PAR 10dB | dBm   |      |                    | 27                 |

Note:

1. Averaged over specified frequency at room temperature
2. Averaged over 20MHz channel
3. Only for temperature above ambient

## EVB Schematic & Layout

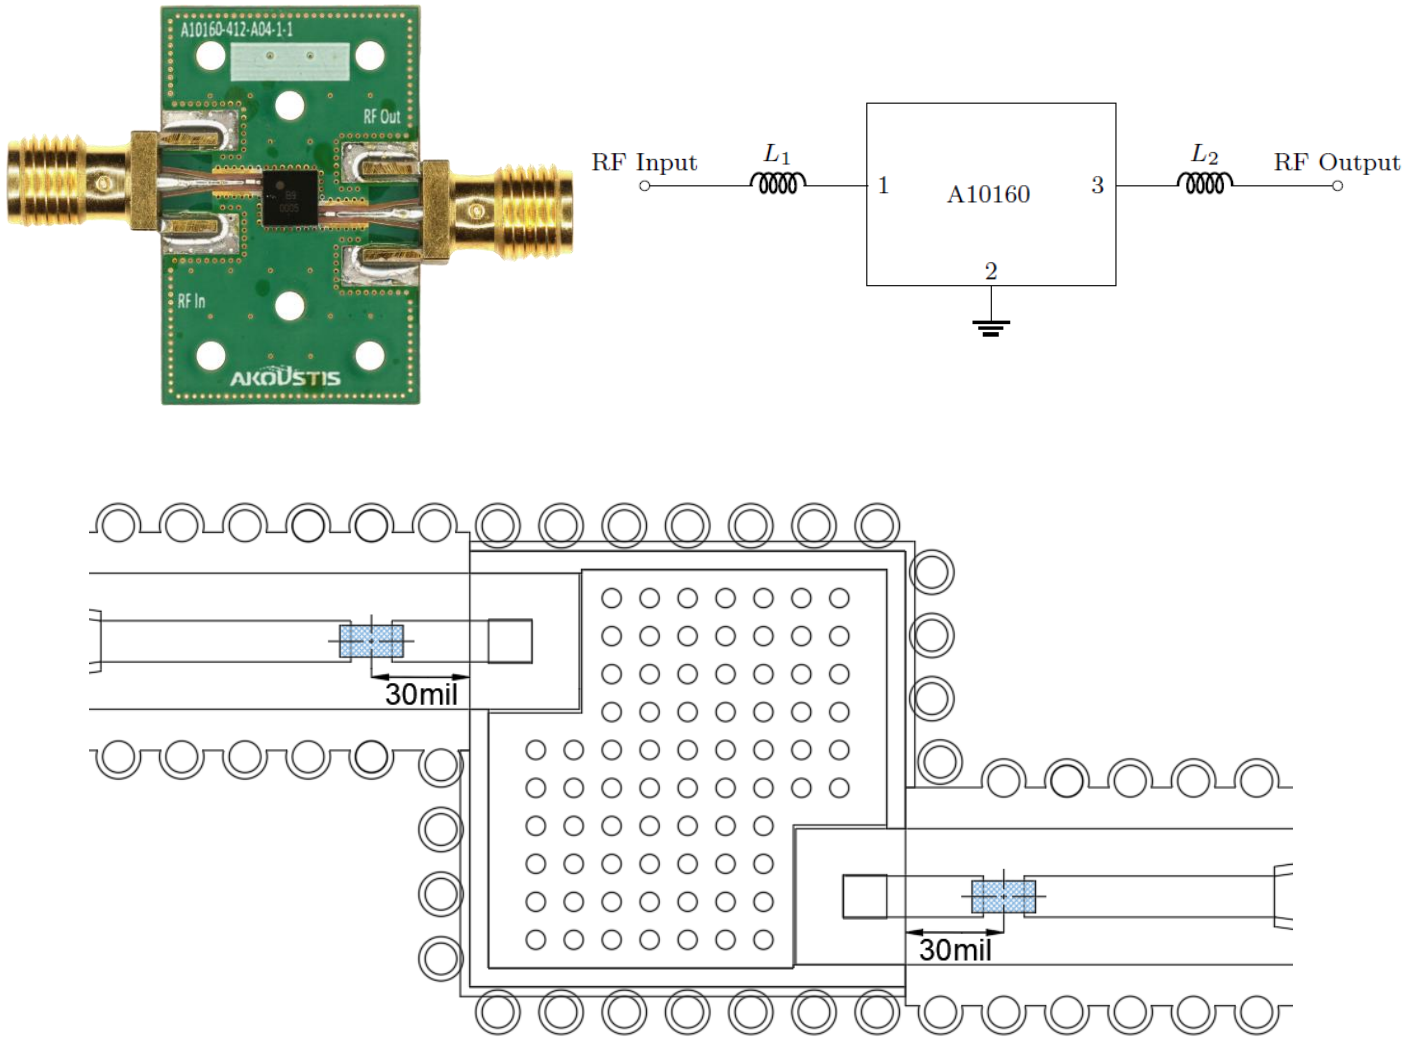






Note:

- 1) Center ground pad vias 6mil diameter
- 2) RF ground vias 10mil diameter

## Bill of Materials

| Reference Des. | Value | Description                  | Manufacturer | Part Number        |
|----------------|-------|------------------------------|--------------|--------------------|
| PCB            | N/A   | Multi layer                  | Multiple     | A10160-412-A04-1-1 |
| U1             | N/A   | 6.0 GHz BAW Filter           | Akoustis     | A10160             |
| L1             | 0.9nH | Chip inductor, 0201, ±0.05nH | Murata       | LQP03HQ0N9W02D     |
| L2             | 1.0nH | Chip inductor, 0201, ±0.05nH | Murata       | LQP03HQ1N0W02D     |

Performance Plots (Temp = 25°C unless otherwise noted)

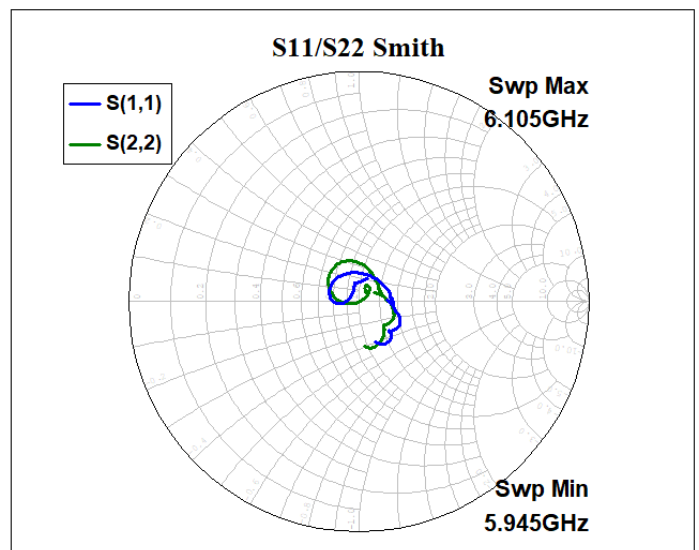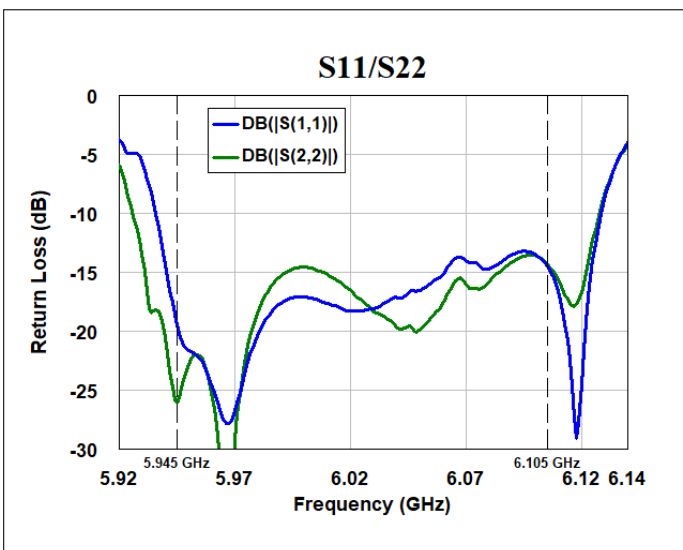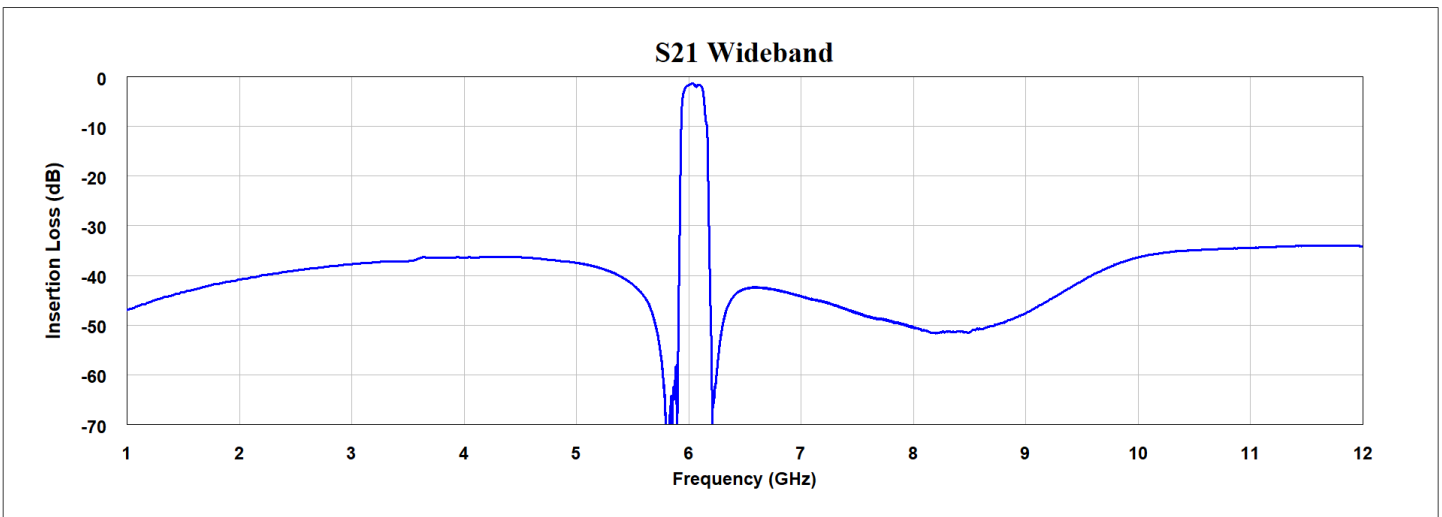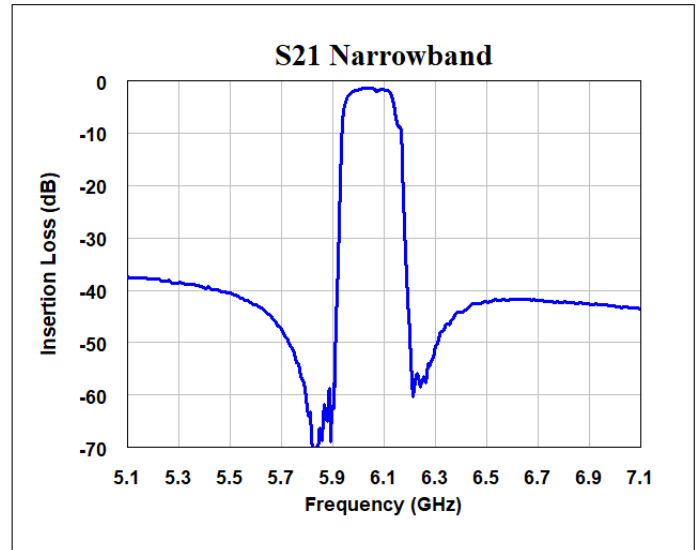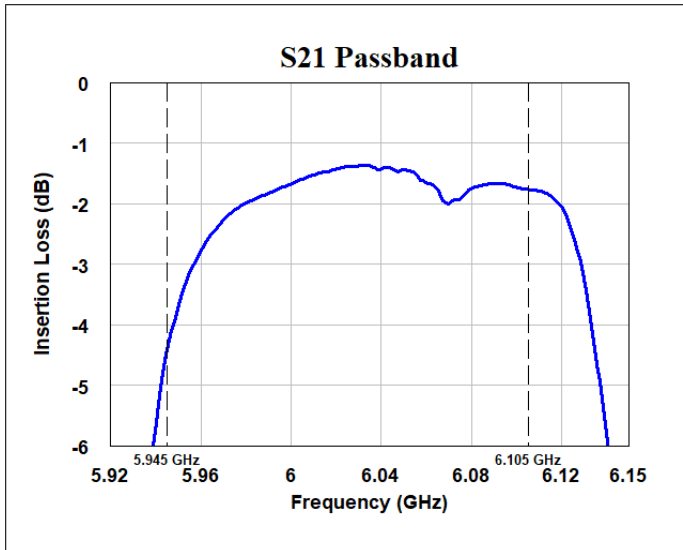


A10160

## Package Drawing & Pin Description

**Notes:**


- All Units are in mm unless otherwise stated
- General Tolerance:  
Linear X.XXX =  $\pm 0.050\text{mm}$   
X.XX =  $\pm 0.10\text{mm}$
- Terminal Finish:  
Electroless Ni/Electroless Pd/Immersion Au

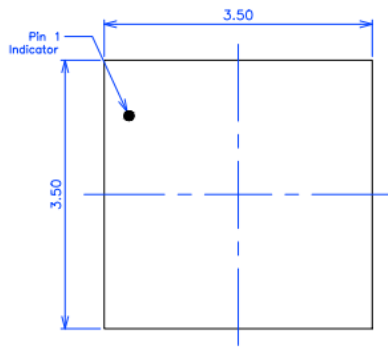


Top View



Side View

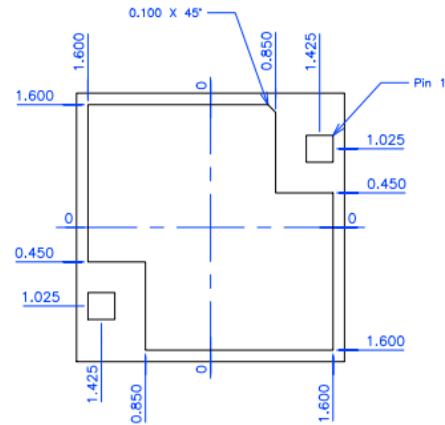


Bottom View




## PCB Mounting Pattern

**Notes:**


- All Units are in mm unless otherwise stated
- General Tolerance:  
Linear X.XXX =  $\pm 0.050\text{mm}$   
X.XX =  $\pm 0.10\text{mm}$

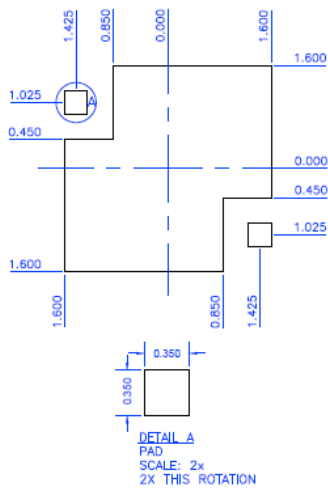

Recommended PCB  
Metal Top View

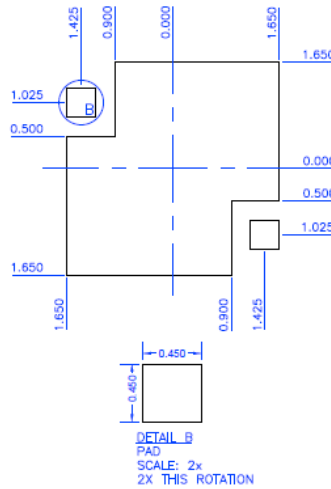


Recommended Solder  
Mask Opening Top View

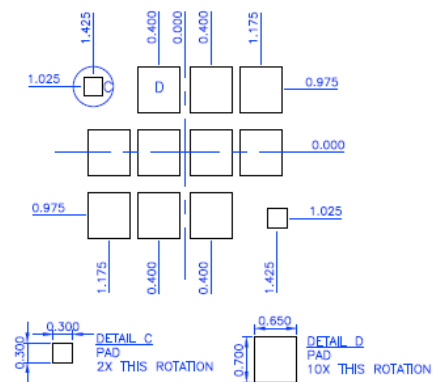


Recommended Stencil  
Pattern Top View

## Typical Part Marking

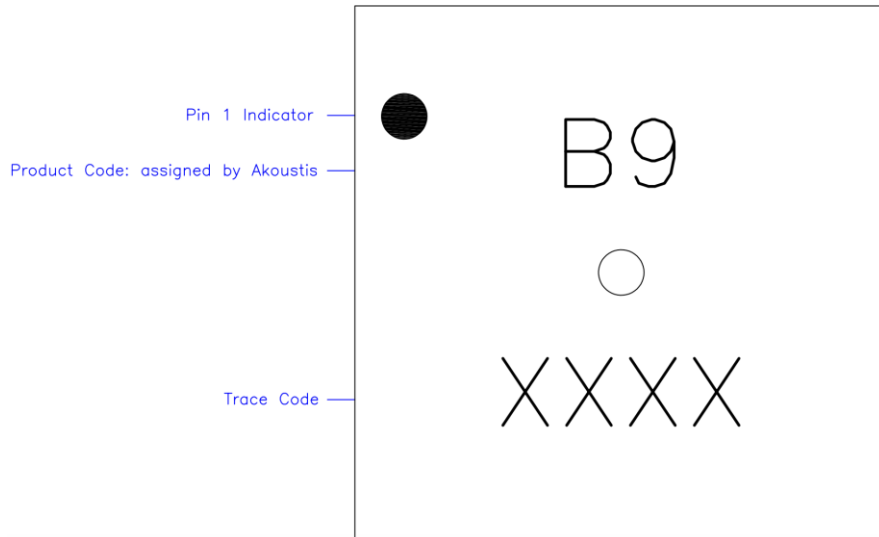



## Reel Dimensions

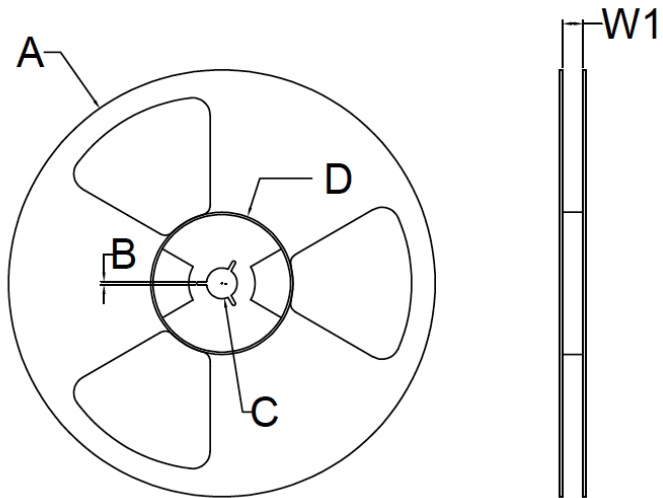

| Reel Dimensions |            |                |              |                      |                 |                     |
|-----------------|------------|----------------|--------------|----------------------|-----------------|---------------------|
| Reel Size       | Tape Width | A              | B            | C                    | D               | W1 *measured at hub |
| 7 Inch          | 8 mm       | 180 +0/-2.0 mm | 2.0mm +/-0.5 | 13.0 + 0.5 / -0 mm   | 60.0 +/- 2.0 mm | 8.40 + 1.5 / -0 mm  |
|                 | 12 mm      | 180 +0/-2.0 mm | 2.0mm +/-0.5 | 13.0 + 0.5 / -0 mm   | 60.0 +/- 2.0 mm | 12.40 + 2.0 / -0 mm |
|                 | 16 mm      | 180 +0/-2.0 mm | 2.0mm +/-0.5 | 13.0 + 0.5 / -0 mm   | 60.0 +/- 2.0 mm | 16.40 + 2.0 / -0 mm |
| 13 Inch         | 8 mm       | 330 +/- 2.0 mm | 2.0mm +/-0.5 | 13.0 + 0.5 / -0.2 mm | 102 +/- 2.0 mm  | 8.8 + 2.0 / -0 mm   |
|                 | 12 mm      | 330 +/- 2.0 mm | 2.0mm +/-0.5 | 13.0 + 0.5 / -0.2 mm | 102 +/- 2.0 mm  | 12.8 + 2.0 / -0 mm  |
|                 | 16 mm      | 330 +/- 2.0 mm | 2.0mm +/-0.5 | 13.0 + 0.5 / -0.2 mm | 102 +/- 2.0 mm  | 16.8 + 2.0 / -0 mm  |


Note: 7 Inch Reel Only Has One Opening

## Tape Dimension

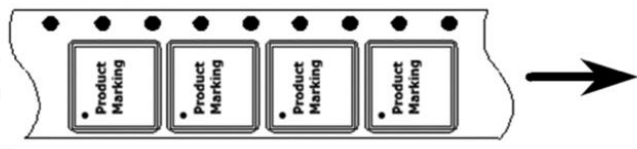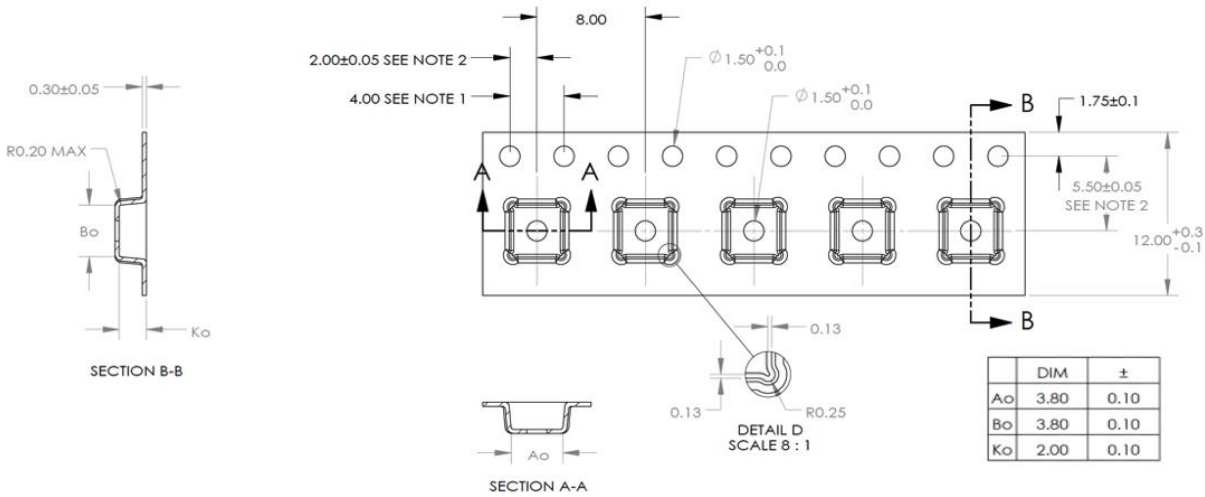

## Recommended Solder Profile

| Parameter                                | Eutectic Sn/Pb  | Pb Free         |
|--|-----------------|-----------------|
| Max Ramp Up Rate                         | 6 Deg C/Second  | 6 Deg C/Second  |
| Soak Temp Time $T_S$ (min) - $T_S$ (max) | 135 - 155 Deg C | 150-200 Deg C   |
| Max Soak Time $T_S$                      | 2 minutes       | 3 minutes       |
| Liquidous Temp $T_L$                     | 183 Deg C       | 220 Deg C       |
| Max Time Above $T_L$                     | 150 Seconds     | 150 Seconds     |
| Max Peak Temperature $T_P$               | 225 Deg C       | 260 Deg C       |
| Max Time at Peak $T_P$                   | 30 Seconds      | 30 Seconds      |
| Max Ramp Down Rate                       | 10 Deg C/Second | 10 Deg C/Second |

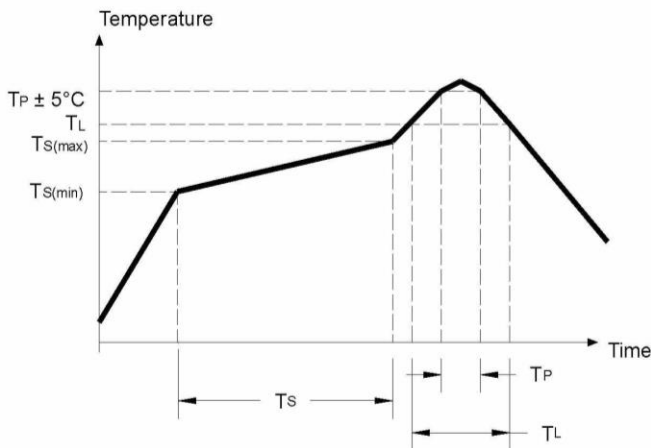

A10160

## Product Compliance Information

### ESD Sensitivity Ratings

Human Body Model (HBM) Test

Rating: Class 1A

Standard: ANSI/ESDA/JEDEC JS-001-2017

Charged Device Model (CDM)

Rating: Class C2A

Standard: ANSI/ESDA/JEDEC JS-002-2018

### MSL Rating

MSL1

### RoHS

This part is compliant with the 2011/65EU RoHS directive on the restrictions of the use of certain hazardous substances in electrical and electronic equipment as amended by Directive (EU) 2015/863

## Contact Information

All contents specified in the datasheet are subject to change. Please contact Akoustis for the latest on our products and company information.

Email: [sales@akoustis.com](mailto:sales@akoustis.com)

Website: [www.akoustis.com](http://www.akoustis.com)

Telephone: +1 704.997.5735

Fax: +1 704.997.5734