



VCO R2000SMUA6R5CR



rev_0

initial rev

	<u>MIN</u>	<u>TYP</u>	<u>MAX</u>	<u>UNITS</u>	<u>NOTES</u>	<u>Production Test</u>	<u>First Article Test</u>
Frequency Range		2000		MHz	1	..	..
Tuning Voltage	1		11	V	1	..	..
Modulation Sensitivity		0.8		MHz/V	1	..	..
Operates with Vtune = 0V					1	..	..
Output Power	0	2	4	dBm	1	..	..
Phase Noise @							
1 KHz Offset		-100		dBc/Hz	1	..	..
10 KHz Offset		-125		dBc/Hz	1	..	..
100 KHz Offset		-145		dBc/Hz	1	..	..
1 MHz Offset		-164		dBc/Hz	1	..	..
10 MHz Offset		-164		dBc/Hz	1	..	..
Pushing		0.1	0.3	MHz/V	3	..	..
Pulling (12dB RL, any phase)		0.2	0.5	MHz _{p-p}	3	..	..
Modulation Bandwidth		1		MHz	4	..	..
Tuning Port Capacitance		57		pF	2	..	..
Harmonics		-13	-7	dBc	3	..	..
Vcc		6.5		V		..	..
Icc		27		mA	1	..	..
Operating Temperature	-40		+85	C	3	..	..
Package		SMUA			6	..	..
LxW		0.500		inch sq.	5	..	..
Height		0.220		inch	5	..	..

Notes


1. Tested in production, and guaranteed
2. Per current design, not a tested parameter
3. Sample tested from production lot
4. Not a tested or guaranteed design goal
5. By inspection
6. RoHS Compliant

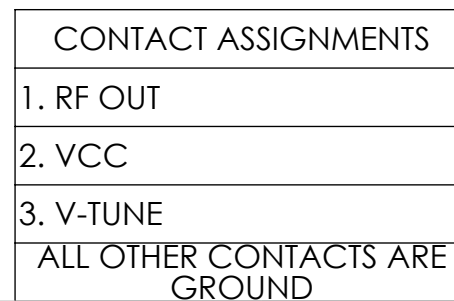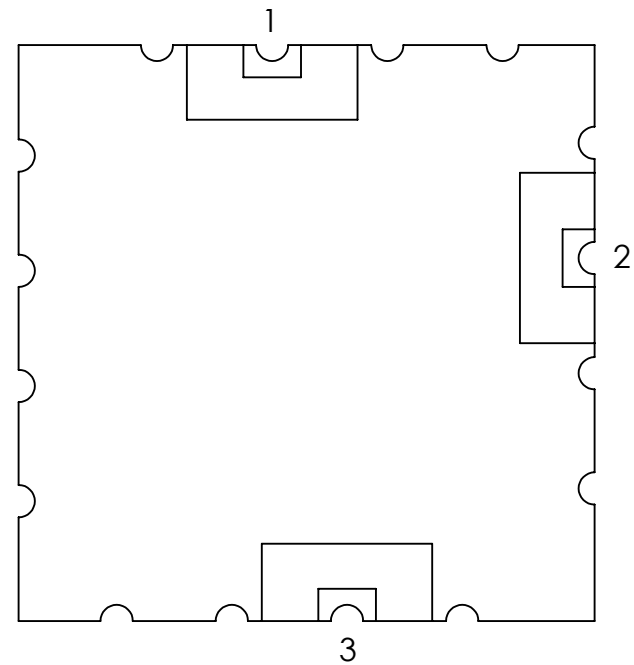


SMUA PACKAGE

REV

SHEET 1 OF 2

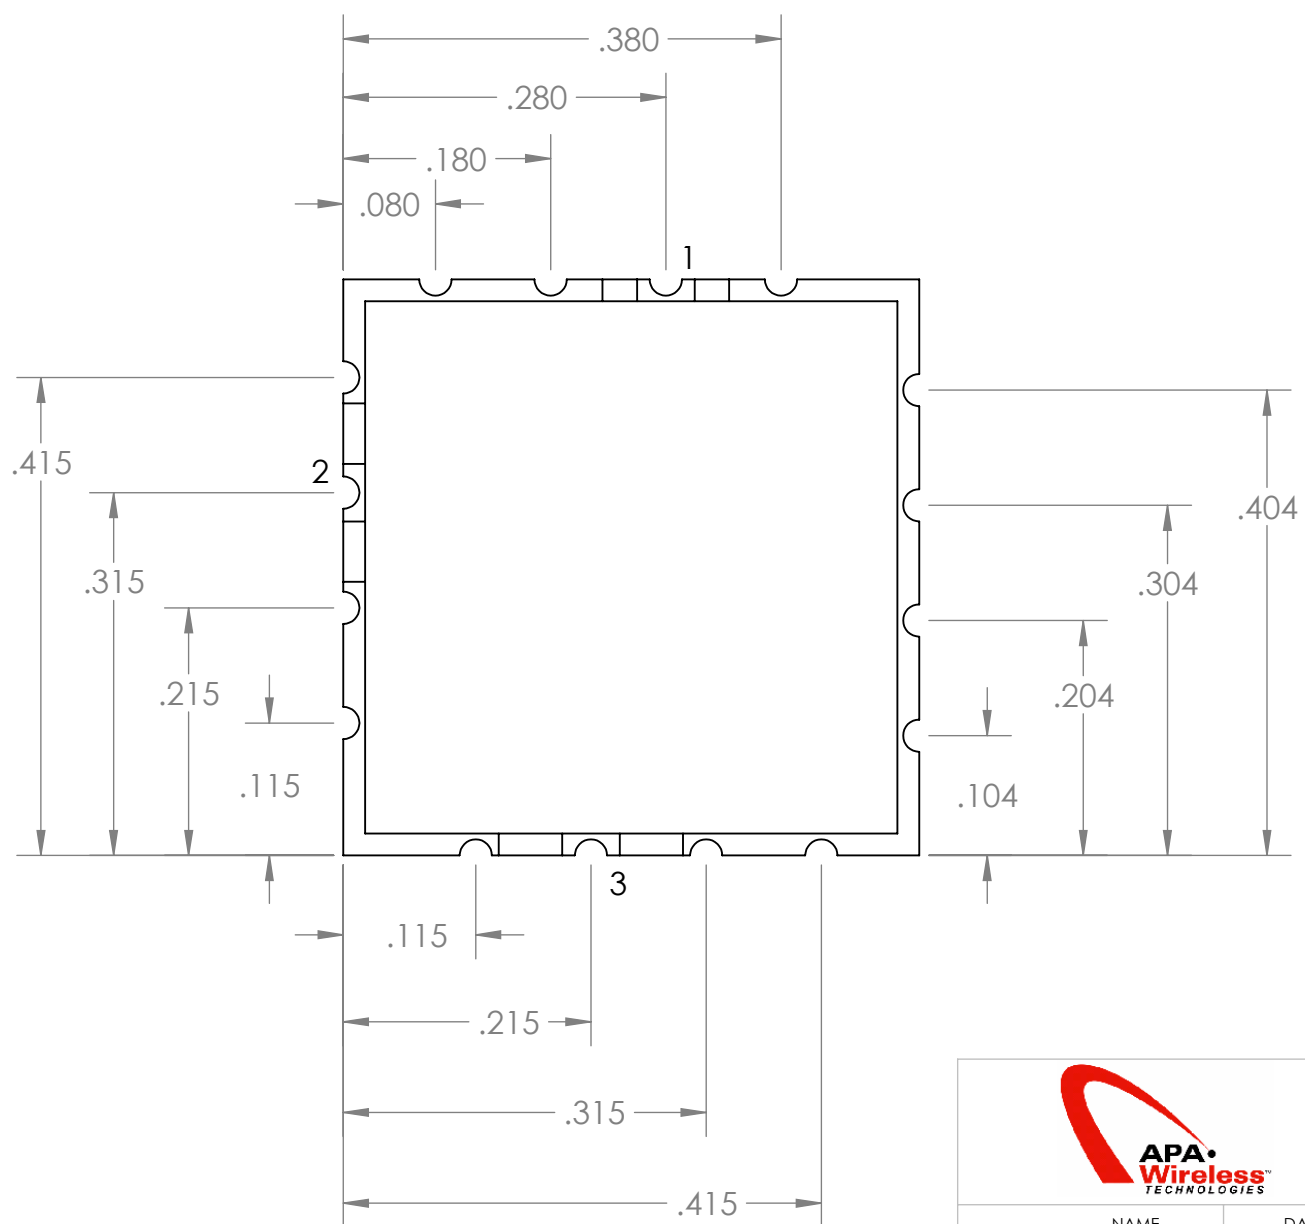

CONTACT DIMENSIONS

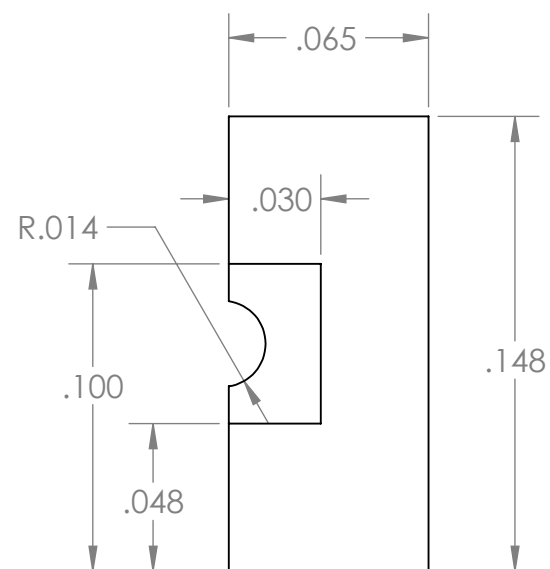

Scale: 16:1



DRAWN	NAME Stefan Babulal	DATE 2/20/2017
-------	------------------------	-------------------


COMMENTS:
All dimensions are in inches.
Tolerances ± 0.005 unless otherwise noted

TITLE:


SMUA PACKAGE

SIZE A	DWG. NO. 1	REV
------------------	---------------	-----


SCALE: 6:1	unit: inch	SHEET 2 OF 2
------------	------------	--------------

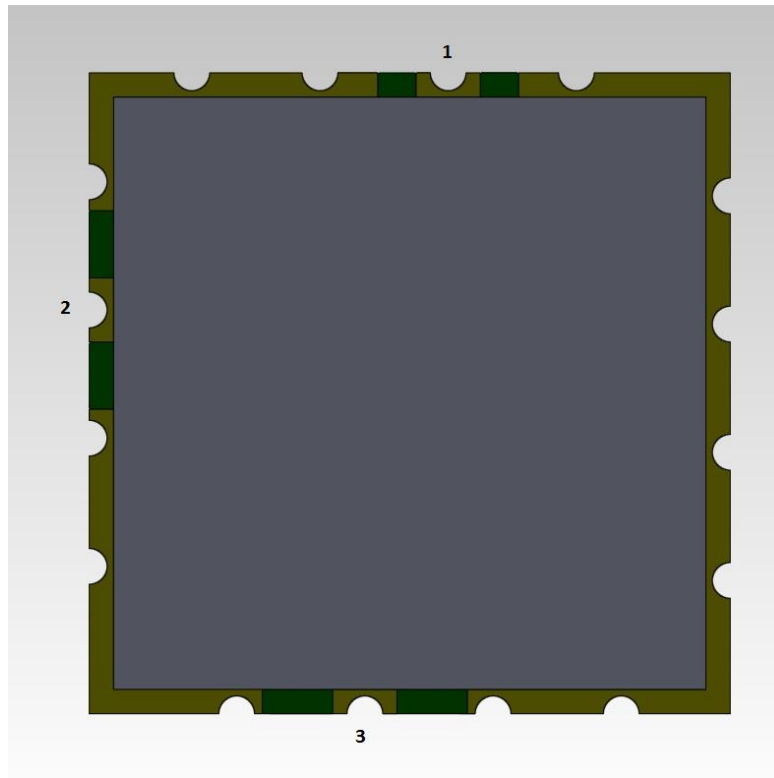


TOP VIEW

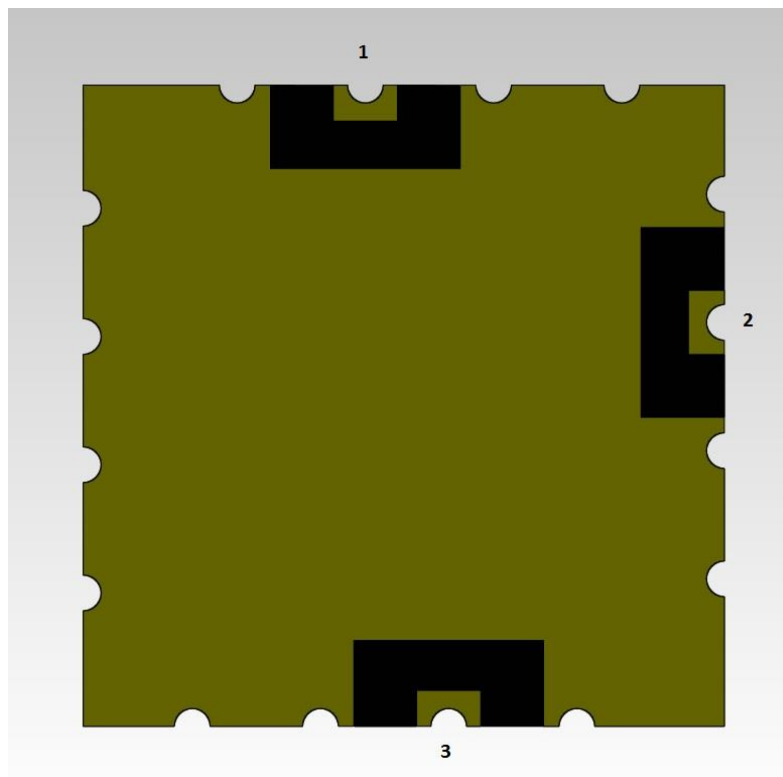

BOTTOM VIEW

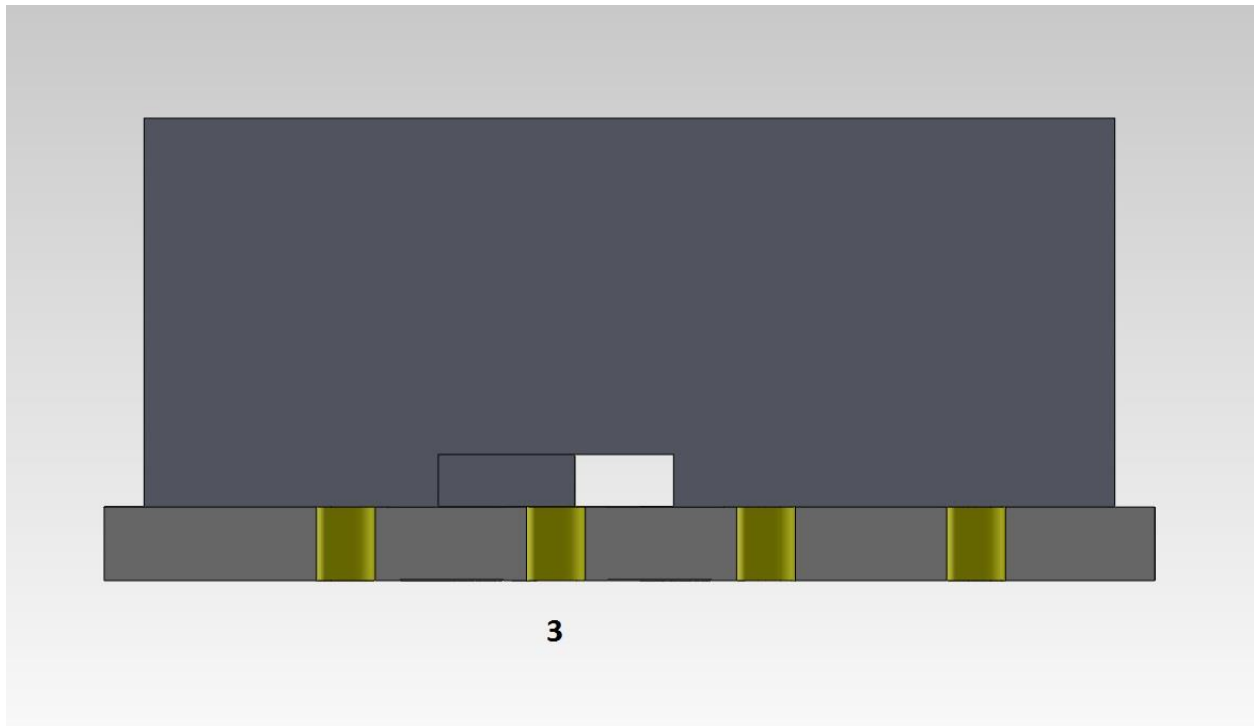

SIDE VIEW

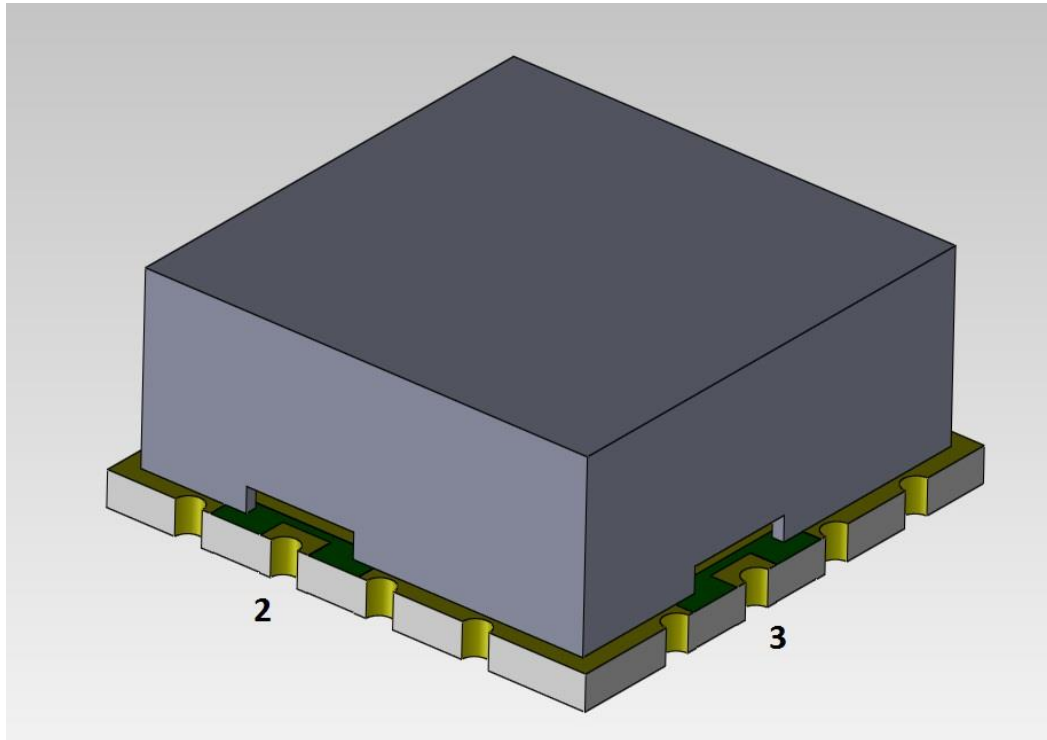

ISOMETRIC VIEW