



VCO R2725SMUA5CR



rev_0

initial rev

						Production	First Article
	<u>MIN</u>	<u>TYP</u>	<u>MAX</u>	<u>UNITS</u>	<u>NOTES</u>	<u>Test</u>	<u>Test</u>
Frequency Range		2725		MHz	1	..	..
Tuning Voltage	0.5		4.5	V	1	..	..
Modulation Sensitivity	2	4	6	MHz/V	1	..	..
Operates with Vtune = 0V					1	..	..
Output Power	4	6	8	dBm	1	..	..
Phase Noise @							
1 KHz Offset		-93	-88	dBc/Hz	1	..	..
10 KHz Offset		-120	-115	dBc/Hz	1	..	..
100 KHz Offset		-140	-135	dBc/Hz	1	..	..
1 MHz Offset		-160	-155	dBc/Hz	1	..	..
Pushing		0.1	0.4	MHz/V	3	..	..
Pulling (12dB RL, any phase)		0.5	1	MHz _{p-p}	3	..	..
Modulation Bandwidth		1		MHz	4	..	..
Tuning Port Capacitance		27		pF	2	..	..
Harmonics		-15	-8	dBc	3	..	..
Vcc		5.0		V			
Icc		28		mA	1	..	..
Operating Temperature	-40		+85	C	3	..	..
Package		SMUA			6	..	..
LxW		0.500		inch sq.	5	..	..
Height		0.220		inch	5	..	..

Notes


1. Tested in production, and guaranteed
2. Per current design, not a tested parameter
3. Sample tested from production lot
4. Not a tested or guaranteed design goal
5. By inspection
6. RoHS Compliant
7. Design goal subject to change

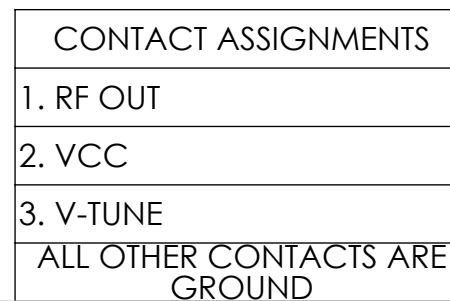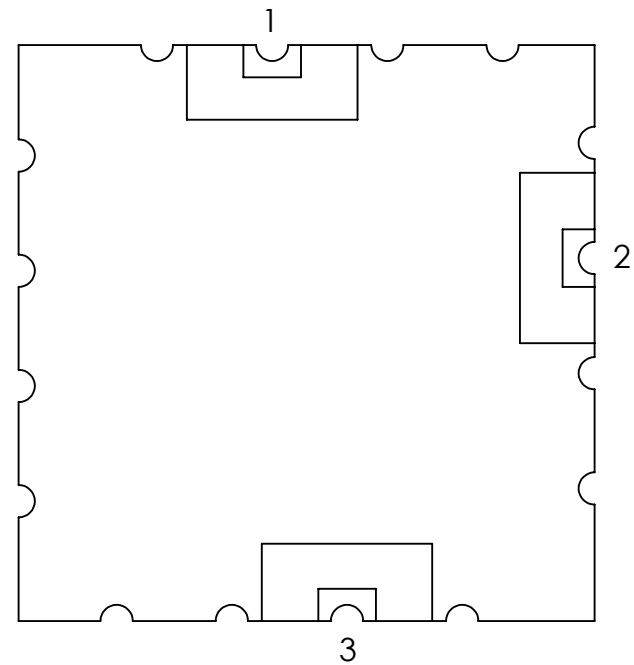


SMUA PACKAGE

SIZE A	DWG. NO. 1	REV
------------------	---------------	-----

SCALE: 6:1	unit: inch	SHEET 1 OF 2
------------	------------	--------------

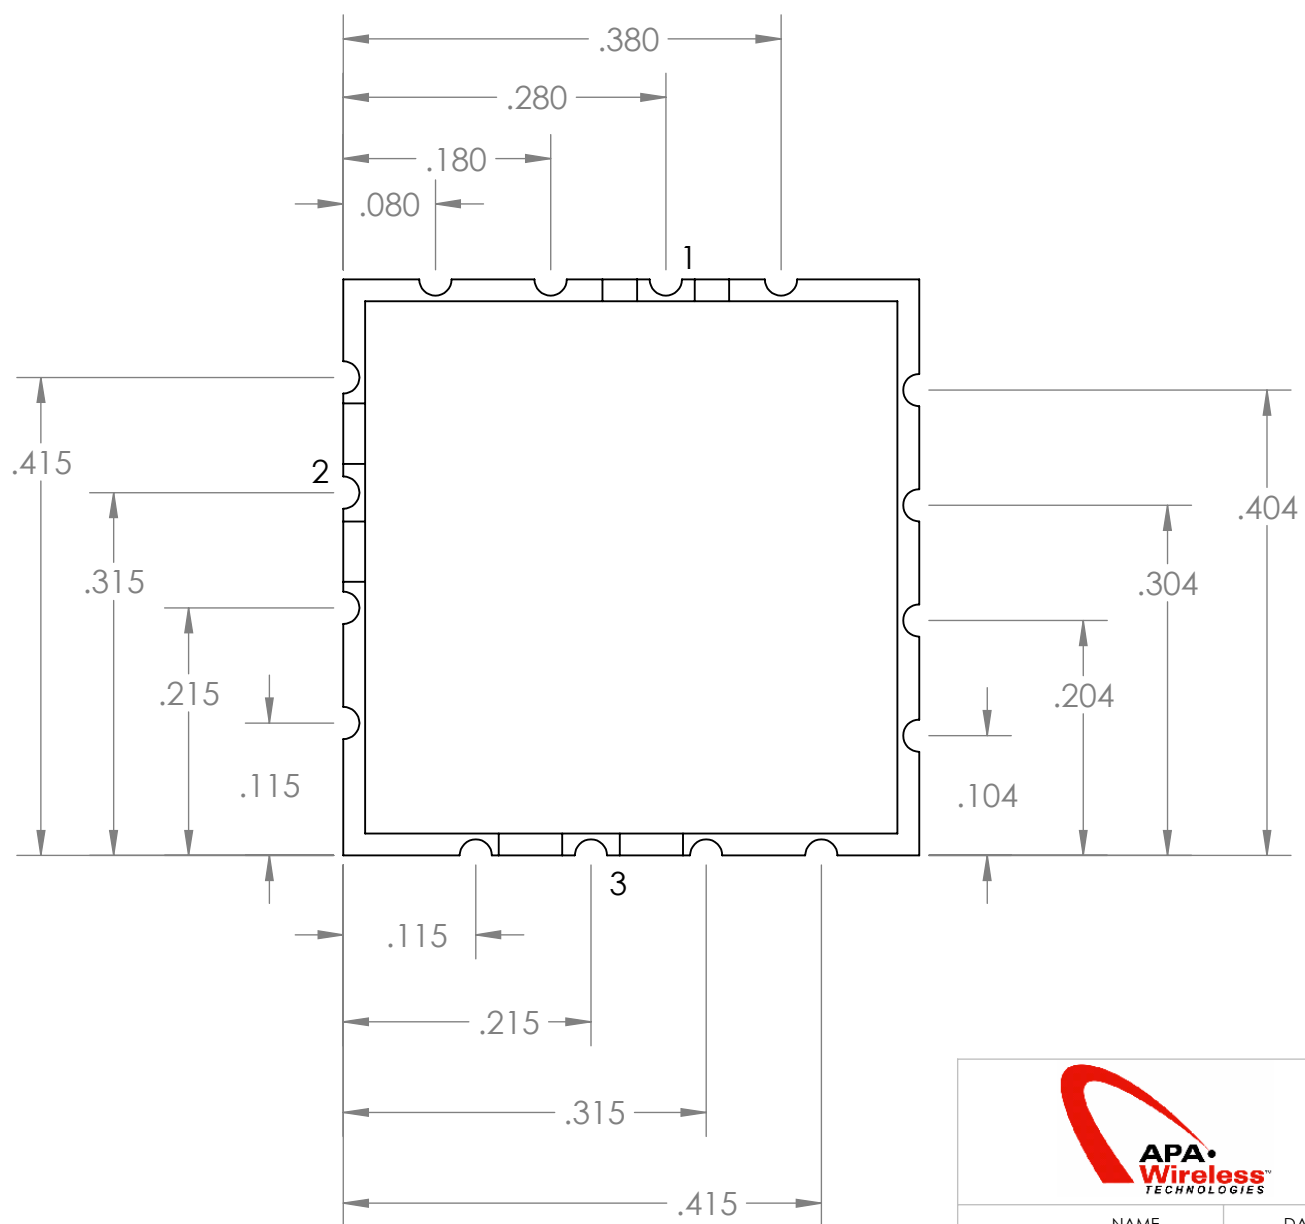

CONTACT DIMENSIONS

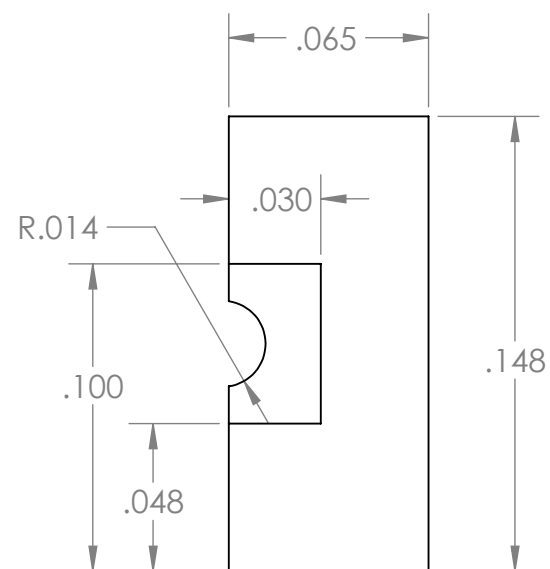

Scale: 16:1



TITLE:

SMUA PACKAGE

DRAWN

NAME
Stefan Babulal

DATE

2/20/2017

SIZE
A

DWG. NO.

1

REV


COMMENTS:

All dimensions are in inches.
Tolerances ± 0.005 unless otherwise noted


SCALE: 6:1

unit: inch


SHEET 2 OF 2

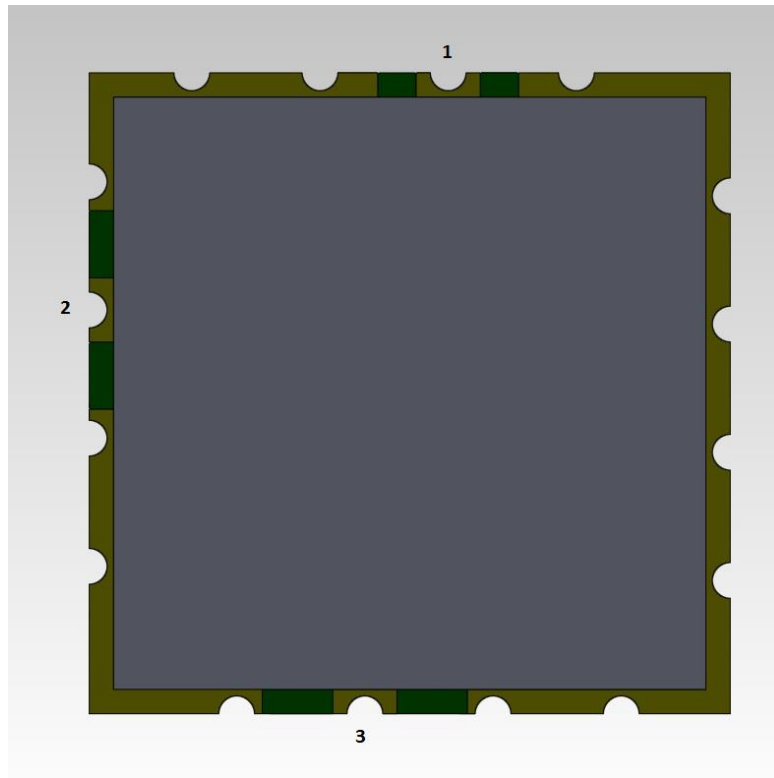


TOP VIEW

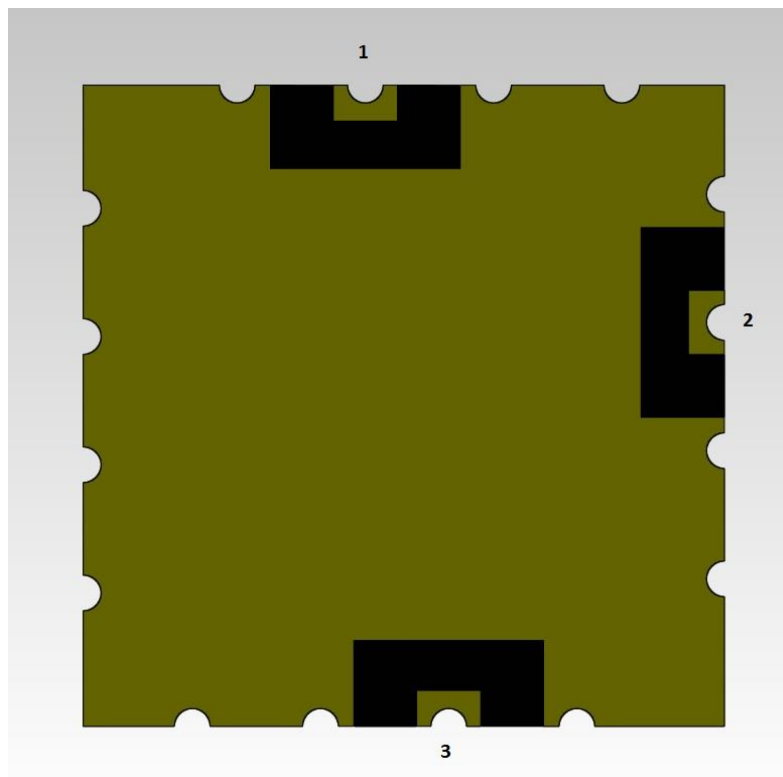

BOTTOM VIEW

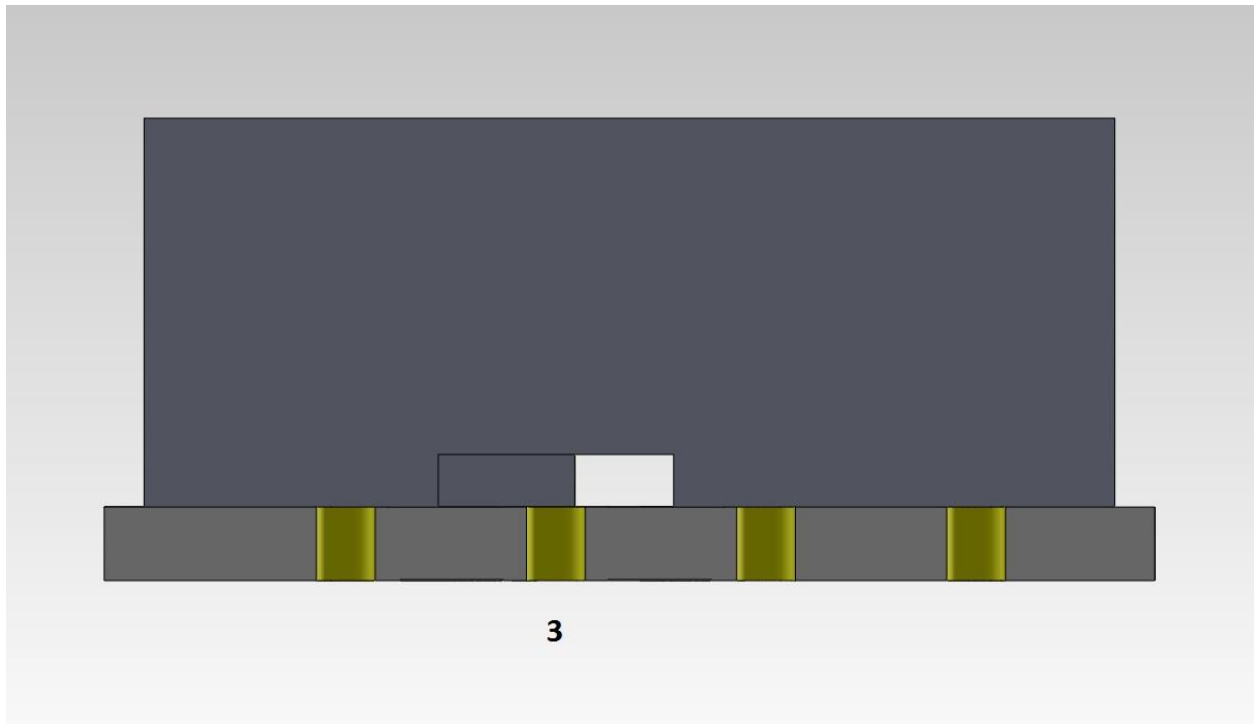

SIDE VIEW

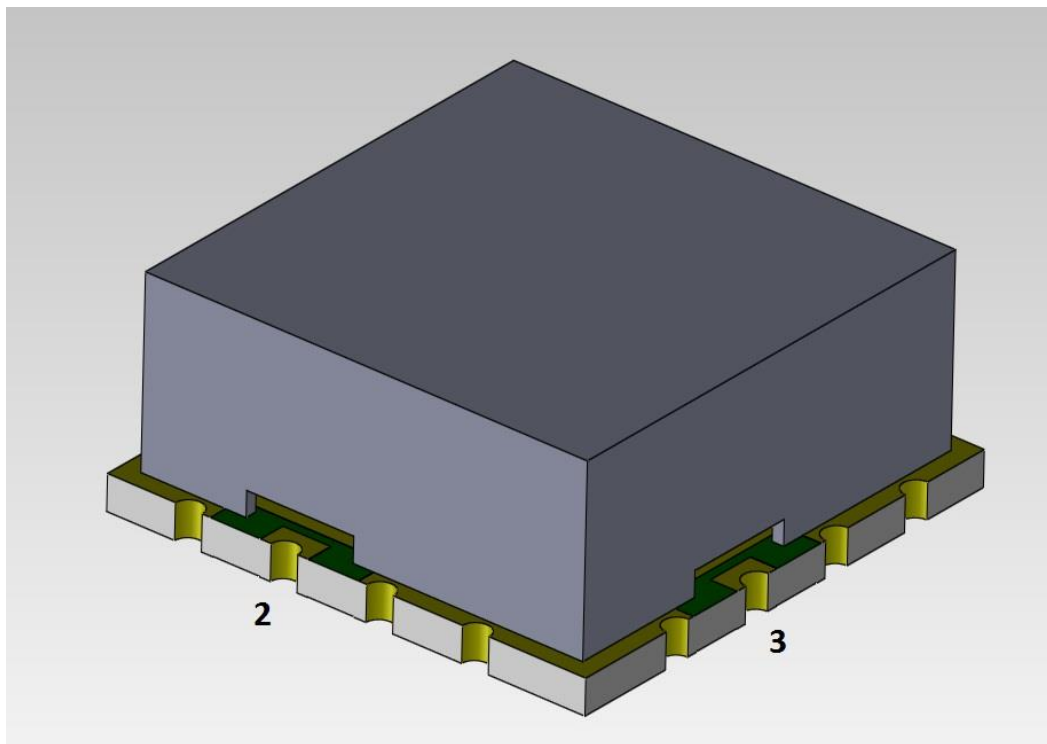

ISOMETRIC VIEW