

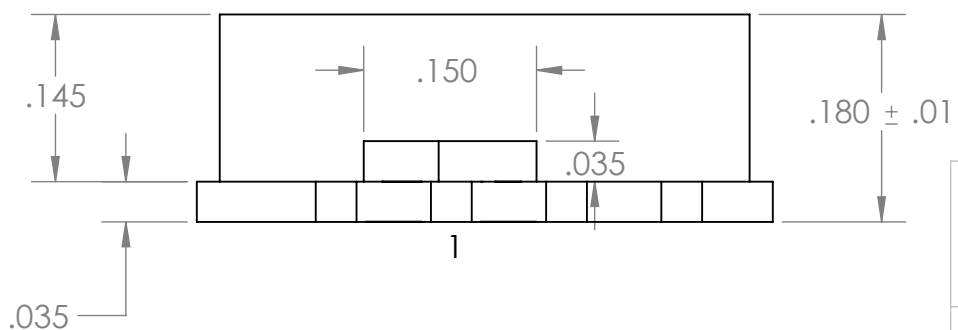


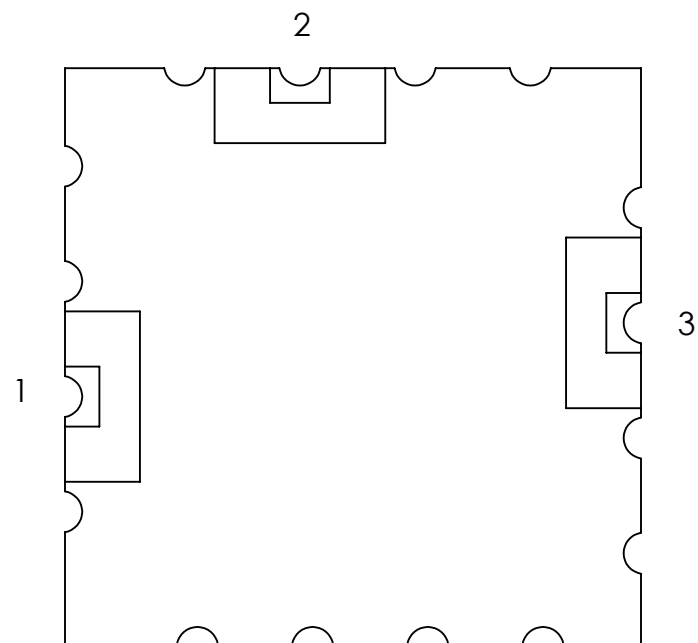

|                              | <u>MIN</u> | <u>TYP</u> | <u>MAX</u> | <u>UNITS</u>       | <u>NOTES</u> | <u>Production Test</u> | <u>First Article Test</u> |
|------------------------------|------------|------------|------------|--------------------|--------------|------------------------|---------------------------|
| Frequency Range              | 3230       |            | 3580       | MHz                | 1            | ..                     | ..                        |
| Tuning Voltage               | 1          |            | 16         | V                  | 1            | ..                     | ..                        |
| Modulation Sensitivity       |            | 27         |            | MHz/V              | 1            | ..                     | ..                        |
| Operates with Vtune = 0V     |            |            |            |                    | 1            | ..                     | ..                        |
| Output Power                 | -3         | 0          | 3          | dBm                | 1            | ..                     | ..                        |
| Phase Noise @                |            |            |            |                    |              |                        |                           |
| 1 KHz Offset                 |            | -76        | -71        | dBc/Hz             | 1            | ..                     | ..                        |
| 10 KHz Offset                |            | -103       | -98        | dBc/Hz             | 1            | ..                     | ..                        |
| 100 KHz Offset               |            | -123       | -118       | dBc/Hz             | 1            | ..                     | ..                        |
| 1 MHz Offset                 |            | -143       | -138       | dBc/Hz             | 1            | ..                     | ..                        |
| 10 MHz Offset                |            | -163       | -155       | dBc/Hz             | 1            | ..                     | ..                        |
| Pushing                      |            | 0.5        | 2          | MHz/V              | 3            | ..                     | ..                        |
| Pulling (12dB RL, any phase) |            | 0.3        | 0.6        | MHz <sub>p-p</sub> | 3            | ..                     | ..                        |
| Modulation Bandwidth         |            | 5          |            | MHz                | 4            | ..                     | ..                        |
| Tuning Port Capacitance      |            | 10         |            | pF                 | 2            | ..                     | ..                        |
| Harmonics                    |            | -20        | -10        | dBc                | 3            | ..                     | ..                        |
| Vcc                          |            | 4.5        |            | V                  |              | ..                     | ..                        |
| Icc                          |            | 27         |            | mA                 | 1            | ..                     | ..                        |
| Operating Temperature        | -40        |            | +85        | C                  | 3            | ..                     | ..                        |
| Package                      |            | SMUA       |            |                    | 6            | ..                     | ..                        |
| LxW                          |            | 0.500      |            | inch sq.           | 5            | ..                     | ..                        |
| Height                       |            | 0.180      |            | inch               | 5            | ..                     | ..                        |

#### Notes

1. Tested in production, and guaranteed
2. Per current design, not a tested parameter
3. Sample tested from production lot
4. Not a tested or guaranteed design goal
5. By inspection
6. RoHS Compliant
7. Design goal subject to change


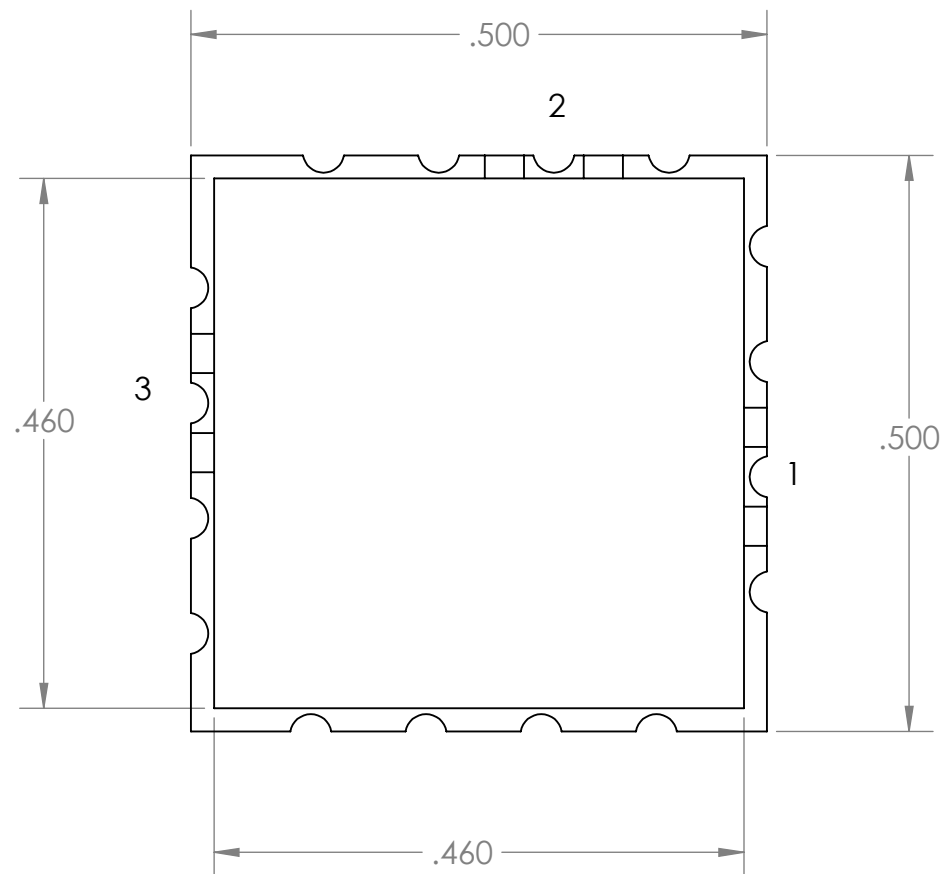


| CONTACT ASSIGNMENTS           |
|-------------------------------|
| 1. RF OUT                     |
| 2. SUPPLY INPUT               |
| 3. TUNING VOLTAGE INPUT       |
| ALL OTHER CONTACTS ARE GROUND |



|                    |               |              |  |
|--------------------|---------------|--------------|--|
| TITLE:<br>SMUA_180 |               |              |  |
| SIZE<br><b>A</b>   | DWG. NO.<br>1 | REV          |  |
| SCALE: 6:1         | unit: inch    | SHEET 1 OF 2 |  |

|                                                                                         |                        |                   |
|-----------------------------------------------------------------------------------------|------------------------|-------------------|
| DRAWN                                                                                   | NAME<br>Stefan Babulal | DATE<br>2/17/2017 |
| COMMENTS:<br>All dimensions are in inches.<br>Tolerances ± 0.005 unless otherwise noted |                        |                   |

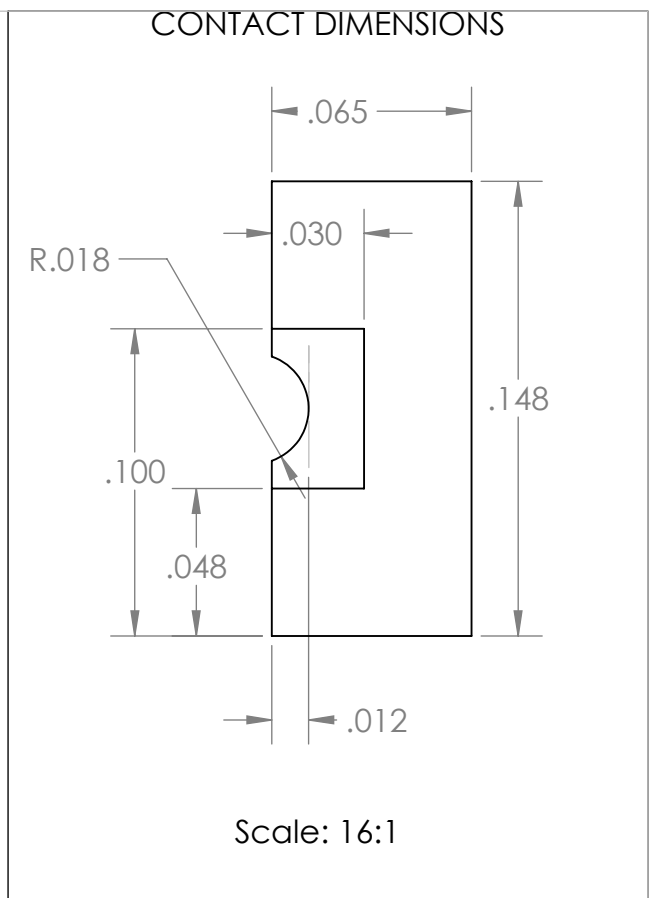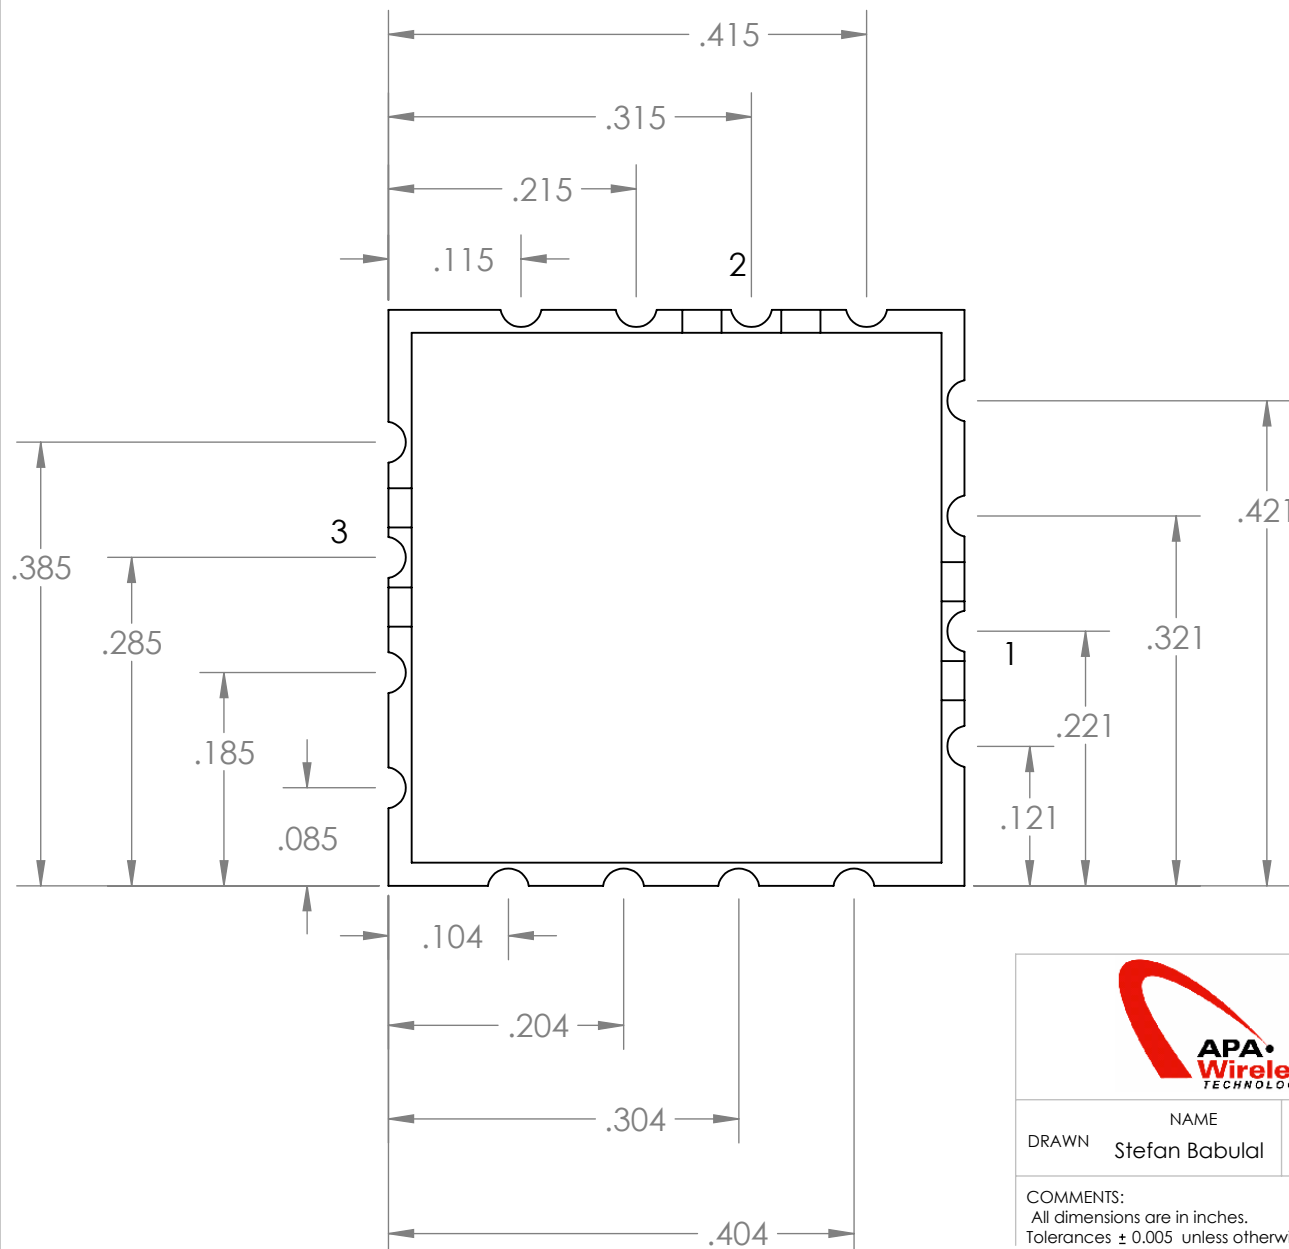

|       |                        |                   |
|-------|------------------------|-------------------|
| DRAWN | NAME<br>Stefan Babulal | DATE<br>2/17/2017 |
|-------|------------------------|-------------------|


COMMENTS:  
All dimensions are in inches.  
Tolerances  $\pm 0.005$  unless otherwise noted

TITLE:


SMUA\_180

|                  |               |     |
|------------------|---------------|-----|
| SIZE<br><b>A</b> | DWG. NO.<br>1 | REV |
|------------------|---------------|-----|


|            |            |              |
|------------|------------|--------------|
| SCALE: 6:1 | unit: inch | SHEET 2 OF 2 |
|------------|------------|--------------|

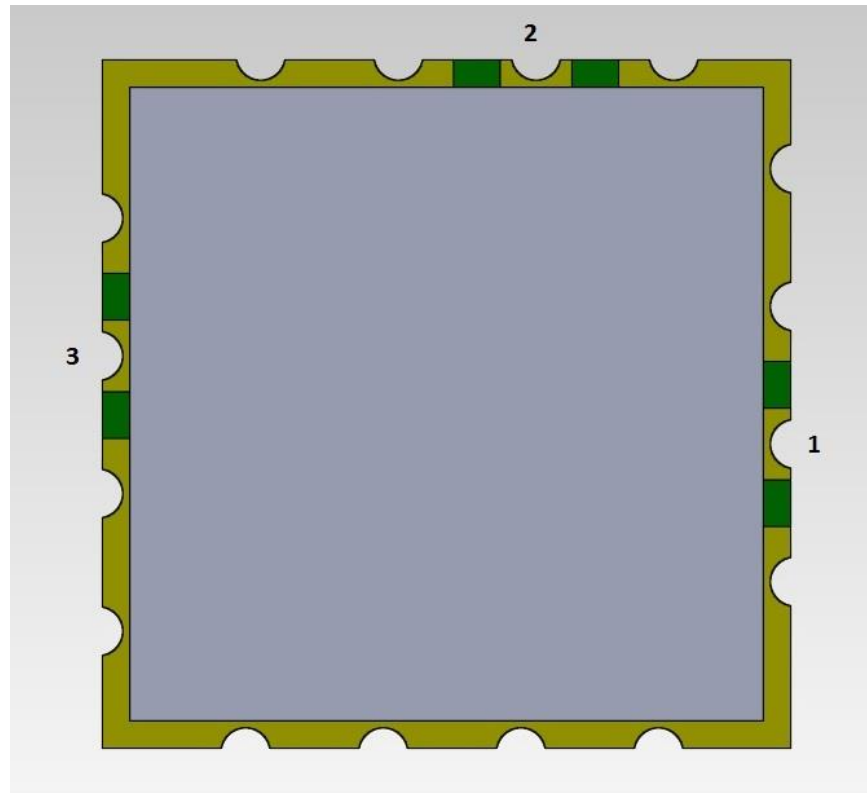


TOP VIEW

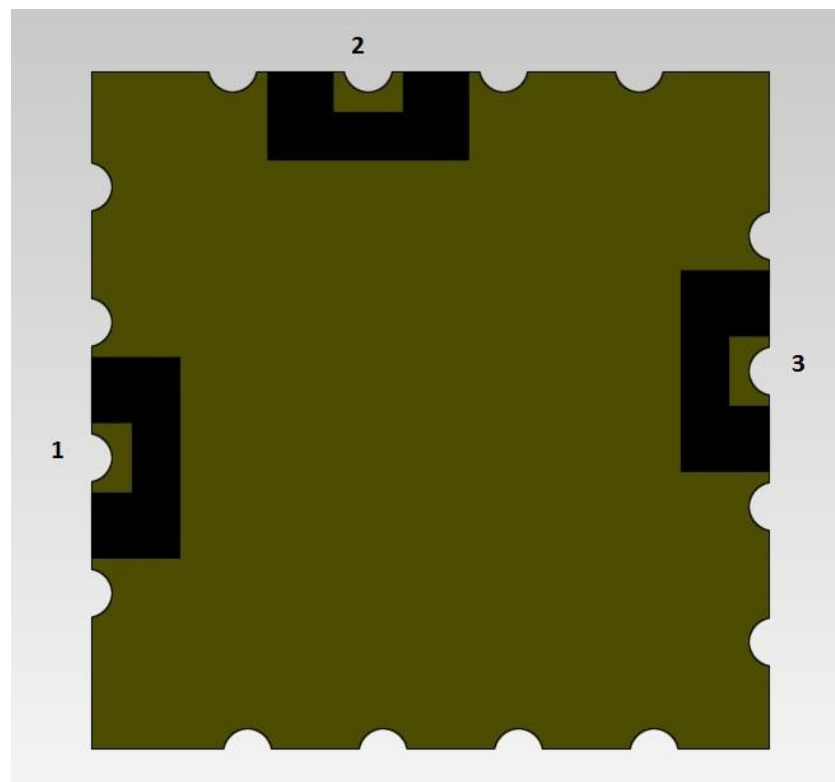

BOTTOM VIEW (INVERTED)

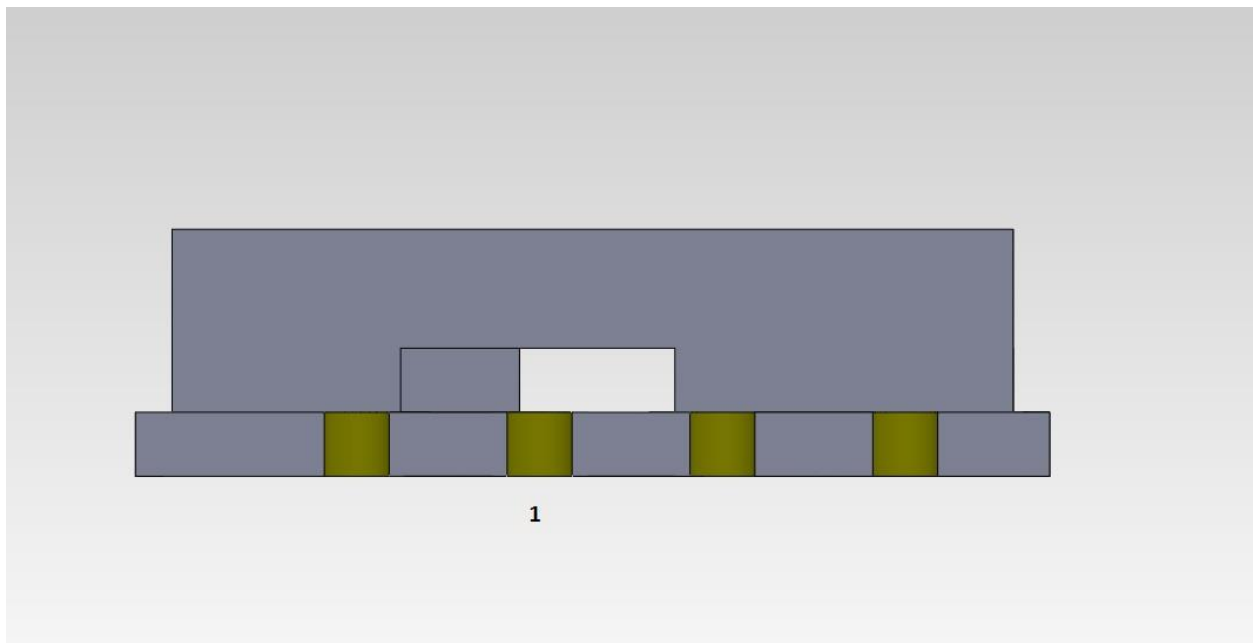

SIDE VIEW

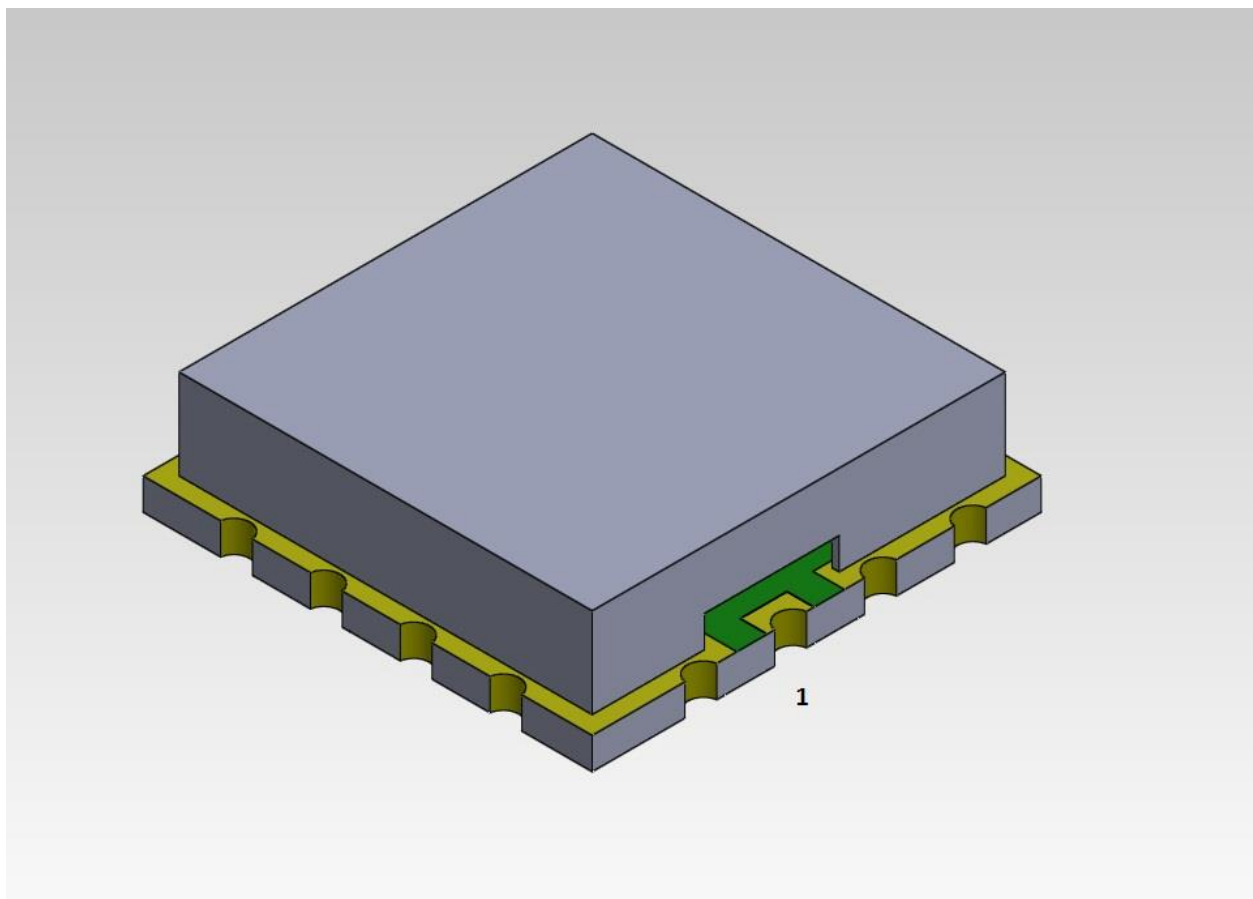

ISOMETRIC VIEW