




1111-025-A091-1

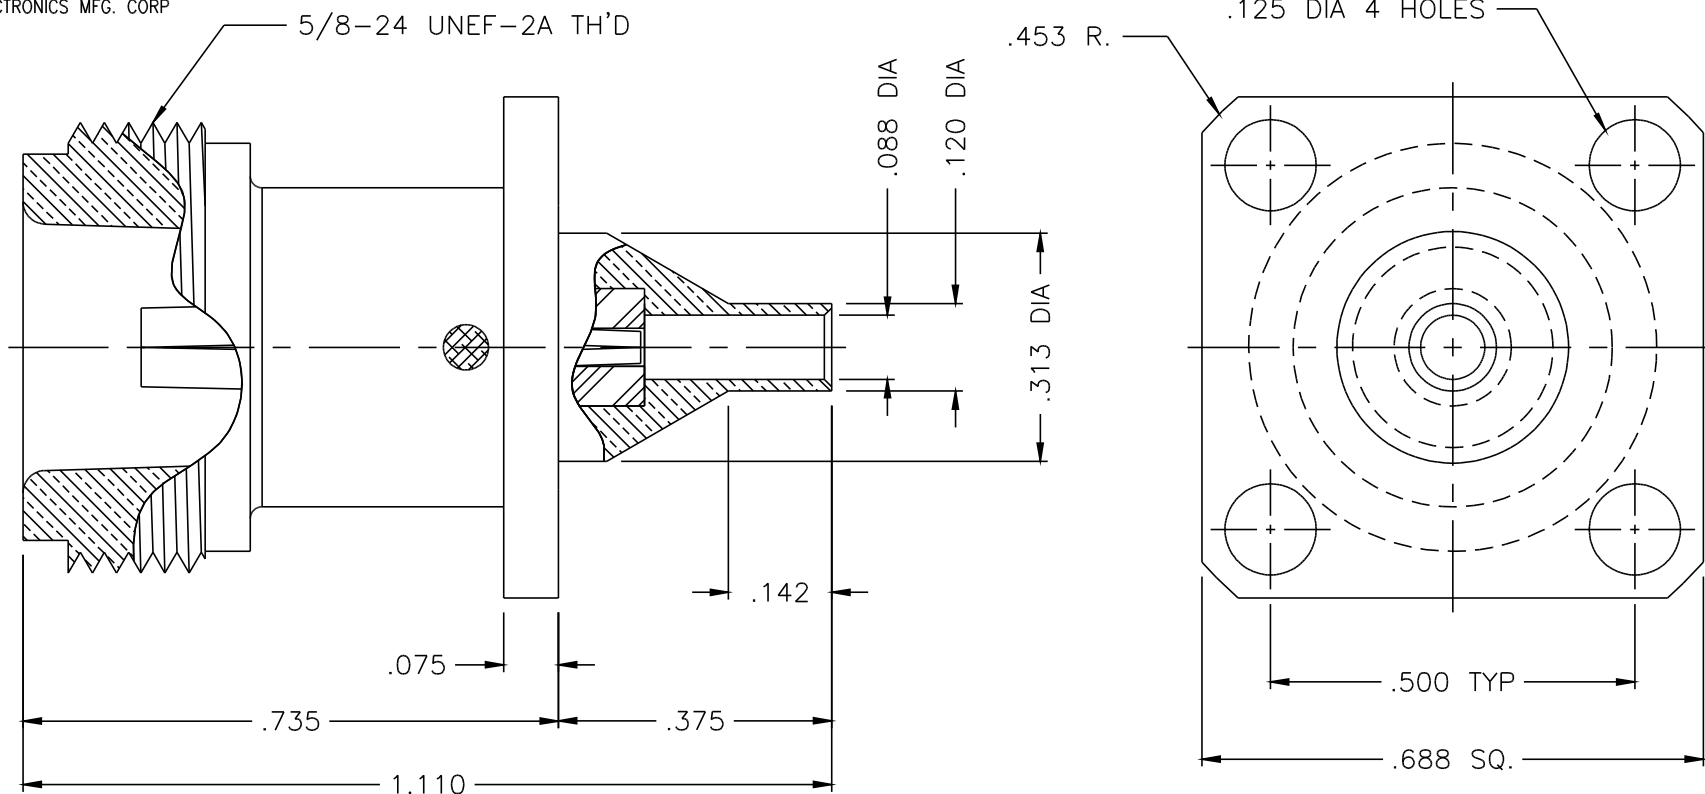

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY - BRASS PER ASTM B16
CONTACT - BERYLLIUM COPPER PER ASTM B196.
INSULATOR - TEFLON PER ASTM D1710
3. FINISHES: BODY - SILVER PLATE PER QQ-S-365
CONTACT - GOLD PLATE PER MIL-G-45204
4. TEMPERATURE RATING: -40°C TO +85°C.

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = $\pm .005$, 2 PLACES = $\pm .02$, ANGLES = $\pm 1/2^\circ$

A	REVISED (MJA)	3/11/98
-	OUTLINE	9/24/97
ALT.	REVISIONS	DATE

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915				
TITLE: 'N' (F) PANEL MOUNTED DIRECT SOLDER JACK EPOXY CAPTIVATED FOR .085 DIA. SEMI-RIGID CABLE				
Drawn by RWP	Scale 4/1	Ckd. by	Engr Appd	FILE NAME: 1111025A091-001T
9/24/97				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

CODE IDENT.-00795

1111-025-A091-1