


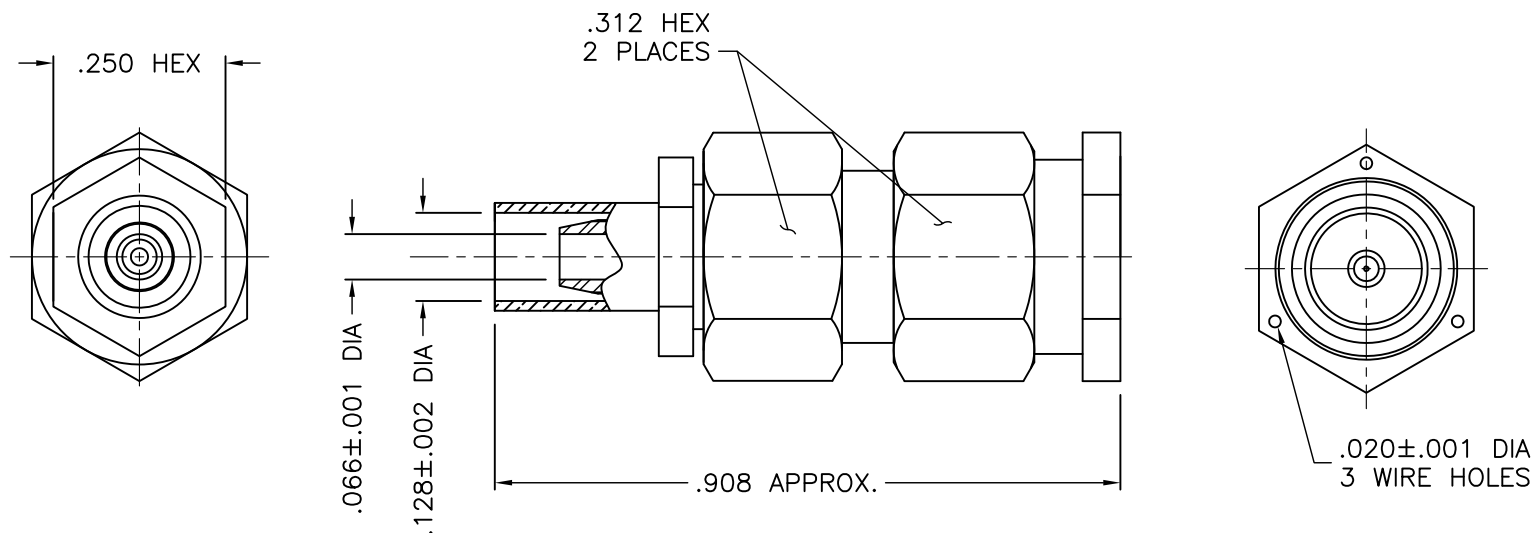

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: CONTACT - BRASS PER ASTM B16
INSULATOR - TEFLON PER ASTM D4894
GASKET - SILICONE RUBBER PER A-A-59588
CRIMP SLEEVE - D.H.P. COPPER CDA ALLOY 122
ALL OTHER METAL PARTS - BERYLLIUM COPPER PER ASTM B196
3. FINISHES: ALL METAL PARTS - GOLD PLATE PER ASTM B488

M39012/55-4007

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915

TITLE: 'SMA' SOLDER SLEEVE PLUG
RG-188 & 316/U CABLES

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = ± 0.005 , 2 PLACES = ± 0.02 , ANGLES = $\pm 1/2^\circ$, SURFACE FINISH = 63

-	OUTLINE	8/17/10
ALT.	REVISIONS	DATE

Drawn by BJM 8/17/10	Scale 4/1	Ckd. by MR	Engr Appd MR	FILE NAME: 1301037G00E-002T
----------------------------	--------------	---------------	-----------------	--------------------------------

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

CODE IDENT.-00795

1301037G00E-002