

# LINEAR WIDEBAND POWER AMPLIFIER

**Model – MB140150M501848-H**

## General Description:

Elite RF's **MB Series** amplifier is a wideband power amplifier designed for CW signals fabricated on LDMOS process and can operate up to **150 MHz**. These amplifiers offer high power density, low thermal resistance, and wideband performance. They can be widely used for military and commercial applications.

Like all Elite RF amplifiers, this product comes with an industry leading **5-year warranty**.



Features	Indicator options	Protections
----------	-------------------	-------------

Wide Freq. Range	DC Power	Thermal Overload
High Output Power	Temp Fault	Over Voltage
High Gain		Reverse Polarity
High Reverse Isolation		
Built-in Protection		
Enable/Disable input (ground to disable)		

## ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Min	Typ	Max	Unit
Frequency Range	BW	140		150	MHz
Output Power CW	Psat		100		Watt
Output Power at 1 dB Compression	P1dB		50		Watt
Small Signal Gain	Gp		18		dB
Gain Flatness	Delta Gp 1		+/- 2		dB
Input VSWR	S11		2:1		Ratio
IMD	IP3		N/A		dBm
Harmonics	H		-20		dBc
Spurious Signals	Spur		-60		dBc
Operating Voltage	VDC	47	48	49	VDC
Current at 100 watts	Current		5		Amps
Class of Operation	C		AB		Class
Noise Figure	NF		N/A		dB
Large Signal Gain	Lsg		17		dB
Max Load VSWR @ 100 Watts	ML		6:1		Ratio

## ENVIRONMENTAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	Tc	-20		+60	Deg. C
Storage Temperature	Tstg	-40		+85	Deg. C
Relative Humidity (non-condensing)	RH			95	%
Altitude	ALT			10,000	Feet
Vibration/Shock	VI /SH		Normal Truck Transport		


## MECHANICAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
Dimensions	Dim		8.5 x 6.0 x 3.2		Inches
Weight	Wt.		3		lbs.
Connectors In/Out	RF Conn		SMA/N		-
Cooling	Th		Heat sink		-

## OPTIONS

Parameter	Add suffix to part number
Heat sink and fans	- H
Isolator with forward and reverse voltage outputs	N/A
TTL Input Trigger	- T

## Connector information

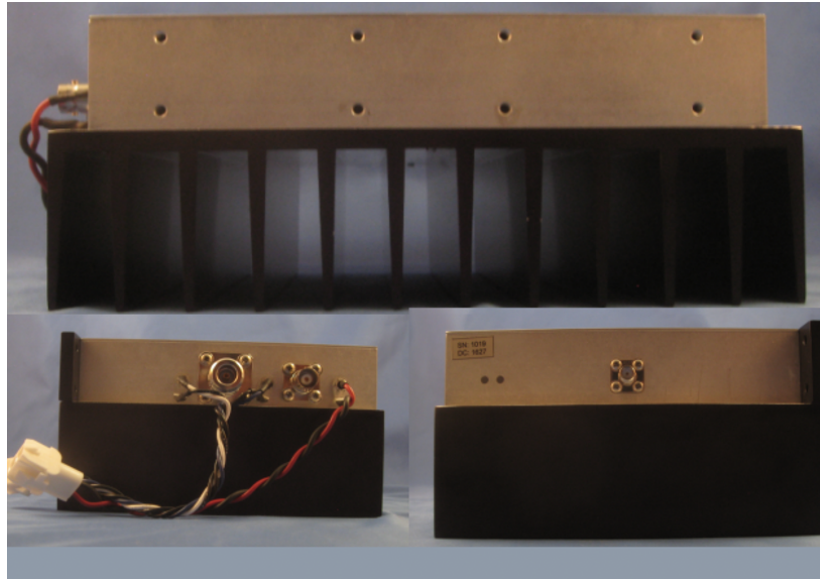

J3 is our RF forward power sample via BNC connector. -37dBc

J4 has the forward and reverse voltages and is TE Connectivity / Amp PN [172160-1](#) w male pins PN [170366-1](#)

Pin 1 = (white) FWRD POWER

Pin 2 = (black) GND

Pin 3 = (white) REFLECTED POWER

Pin 4 = (black) GND

J5 has the amp power and is TE Connectivity/Amp PN [350778-1](#) with male pins PN [350550-1](#)

Pin 1 = (red) +48VDC

Pin 2 = (black) return

