

D

C

B

A

D

C

B


A

PROPRIETARY AND CONFIDENTIAL
THIS DOCUMENT CONTAINS DATA WHICH IS PROPRIETARY OR CONFIDENTIAL TO "EMPOWER RF". THE DATA CONTAINED HEREIN SHALL NOT BE USED, DUPLICATED OR ALTERED WITHOUT THE EXPRESSED WRITTEN CONSENT OF "EMPOWER RF." ALL RIGHTS ARE RESERVED

- NOTES: UNLESS OTHERWISE SPECIFIED
- 1. ELECTROSTATIC DISCHARGE CONTROL PROGRAM FOR PROTECTION OF ELECTRICAL AND ELECTRONIC PARTS, ASSEMBLIES AND EQUIPMENT SHALL BE IAW: DOD-STD-1686 AND DOD-HDBK-263, CLASS 3.
 - 2. ALL DIMENSIONS ARE FINISHED STATE.
 - 3. WORKMANSHIP PER EMPOWER WS 1.0 AND 3.0 SOLDER PER IPC J-STD-001 AND ASSEMBLE PER IPC-A-610,CL3.
 - 4. NOT USED.
 - 5. PLACE IDENTIFICATION LABEL APPROX AS SHOWN PER QAR 1.0.

SEE SEPARATE PARTS LIST

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
ANGULAR TOL : ±2°
2PL ±.015 3PL ±.005
TOTAL RUNOUT .003
SURFACE FINISH:
INTERPRET DIM AND TOL PER
ASME Y14.5M - 1994
DO NOT SCALE DRAWING



CONTRACT NO.

APPROVALS

DATE

DRAWN

L.M.

06/22/11

CHECKED

C.M.

06/22/11

ENG APPR.

R.P.

06/22/11

MFG APPR.

Q.A.

TITLE

HEATSINK ASSY,FANS,(HEATSINK
7" x 8.75" x 2.9"),(072)

SIZE

CAGE CODE

DWG. NO.

REV

D

1N5X2

D8300-0105

A

SCALE:

1:1

WEIGHT:

LB

SHEET

1 OF 2



316 W. FLORENCE AVE.
INGLEWOOD
CA, 90301

4

3

2

1






3

2


1

DWG. NO.		SHT	1	REV	A
REVISIONS					
ZONE	REV.	DESCRIPTION		DATE	APPROVED
-	A	INITIAL RELEASE ECO #: 7324		06-27-11	-


PROPRIETARY AND CONFIDENTIAL
THIS DOCUMENT CONTAINS DATA WHICH IS PROPRIETARY OR CONFIDENTIAL TO "EMPOWER RF". THE DATA CONTAINED HEREIN SHALL NOT BE USED, DUPLICATED OR ALTERED WITHOUT THE EXPRESSED WRITTEN CONSENT OF "EMPOWER RF." ALL RIGHTS ARE RESERVED

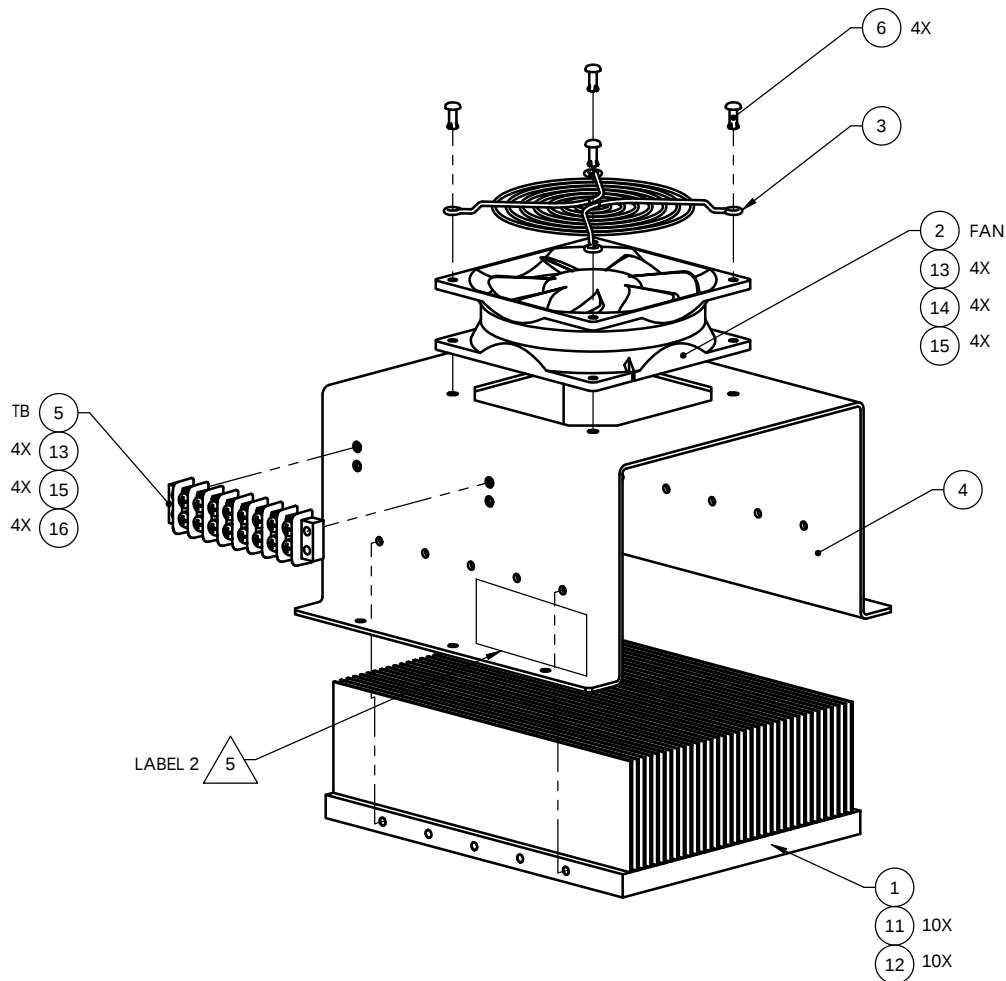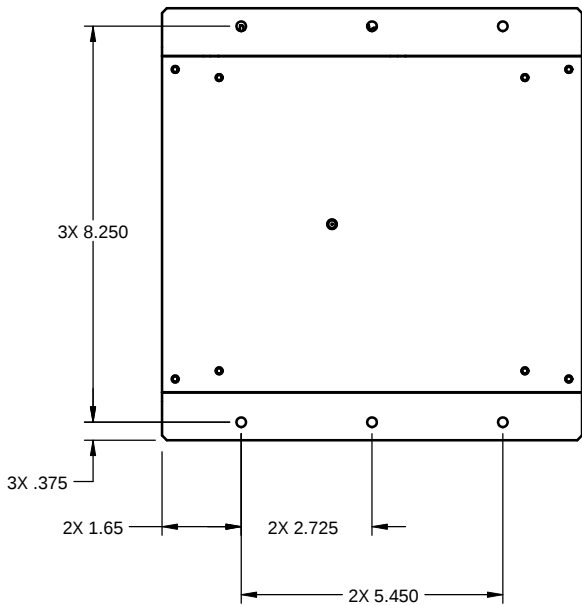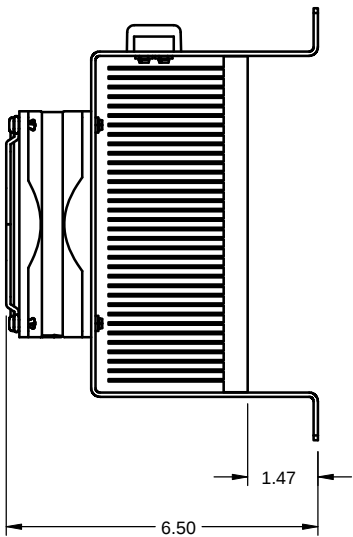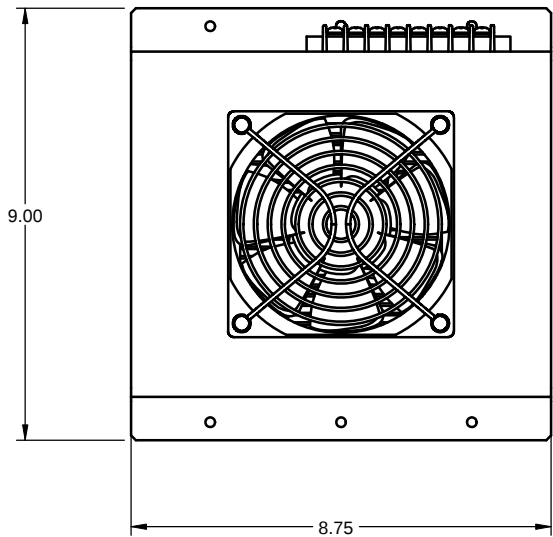

PIN	DESCRIPTION	AWG	COLOR	TO POINT	LENGTH
1	VDD	24	RED	TB-6-A	
2	GND	24	BLACK	TB-8-A	

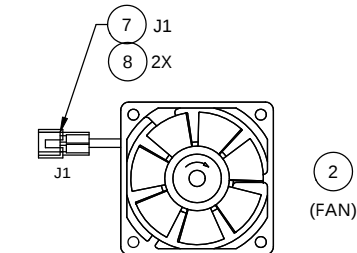

PIN	DESCRIPTION
1	VDD
2	GND



PIN	DESCRIPTION	AWG	COLOR	TO POINT	LENGTH
1-A					
1-B					
2-A					
2-B					
3-A					
3-B					
4-A					
4-B					
5-A					
5-B					
6-A	VDD (+28V)	20	RED	P1-1	
6-B					
7-A					
7-B					
8-A	GND	20	BLK	P1-2	
8-B					