

TERMINATIONS

TYPE N / Conduction Cooled

DC - 800 MHz

250 Watts



MODELS: 3705M, 3705F

SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 800 MHz

VSWR

DC - 200 MHz _____ 1.15:1 Max.

200 - 400 MHz _____ 1.25:1 Max.

400 - 800 MHz _____ 1.30:1 Max.

Impedance _____ 50 Ohms

Input Power _____ 250 Watts CW @ +85°C Max. Case Temp.

Temperature Coefficient _____ 150 ppm/°C Max.

Mechanical:

Type N Connectors _____ Stainless Steel


Mates with MIL-STD-348

Housing _____ Nickel Plated Copper

Cover _____ Nickel Plated Brass


Model Number: 3705M

Type N Male Connector

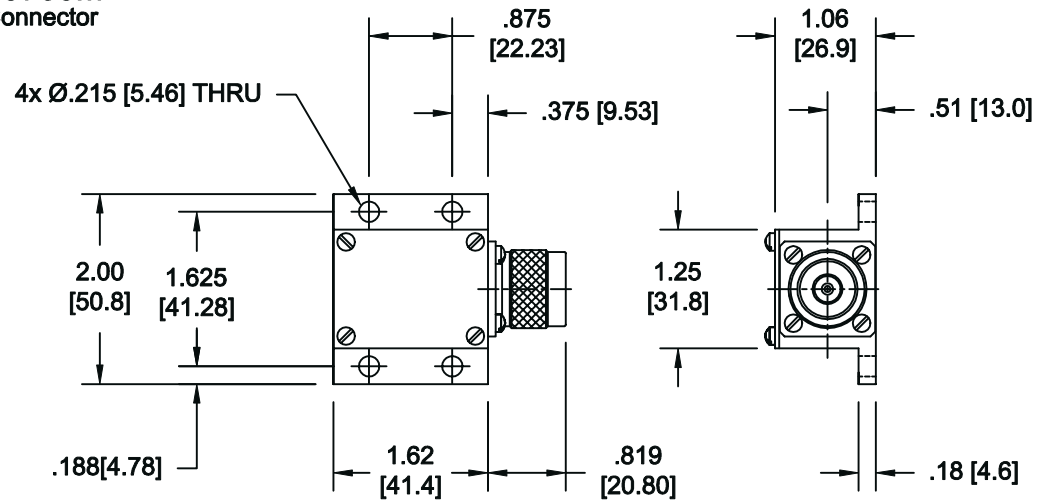

Model Number: 3705F

Type N Female Connector

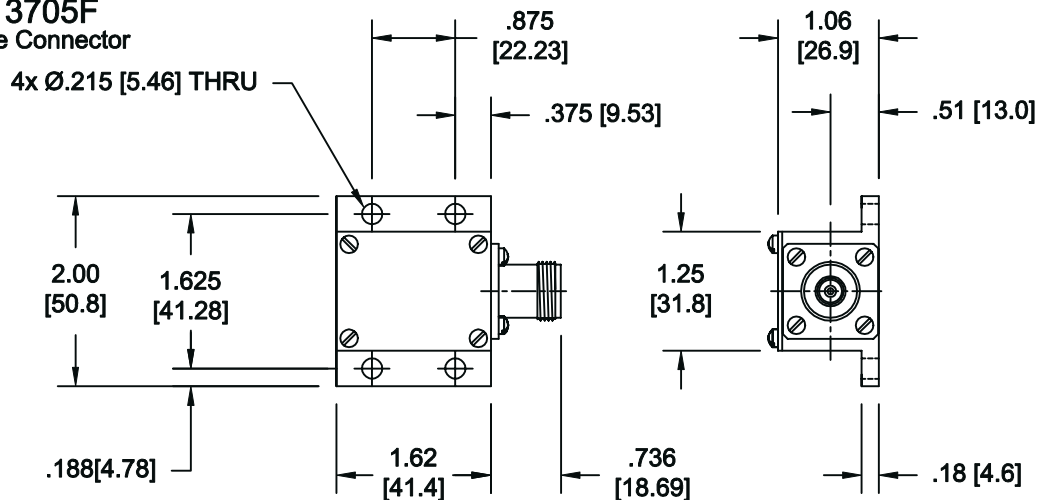

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

3705; REV B