

DC BLOCKS

SMA, 10 MHz - 18 GHz, Inner Only

SPECIFICATIONS:

Models: 8056, 8056H, 8057, 8057H

RoHS
Compliant

Electrical:


Frequency Range _____ 10 MHz - 18 GHz
VSWR _____ 1.35:1 Max.
Impedance _____ 50 Ohms
Insertion Loss _____ 0.5 dB Max.
Voltage Rating _____ 200 Volts
Operating Temp. Range _____ -65°C to +125°C

Mechanical:

Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348 _____
Conductors _____ Gold Plated Beryllium Copper


AEROFLEX
A passion for performance.

Model Number: **8056**
Female / Female Connectors
Length = .865 ±.015 [21.97 ±0.38]

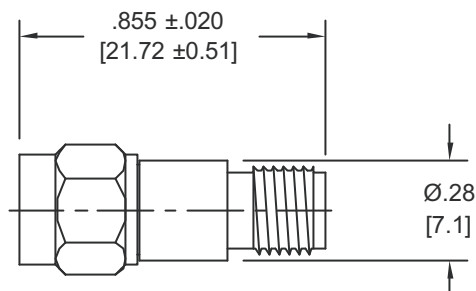

Model Number: **8057**
Male / Male Connectors
Length = .980 ±.025 [24.89 ±0.64]

Model Number: **8056H**
Female / Female Connectors
Length = .865 ±.015 [21.97 ±0.38]

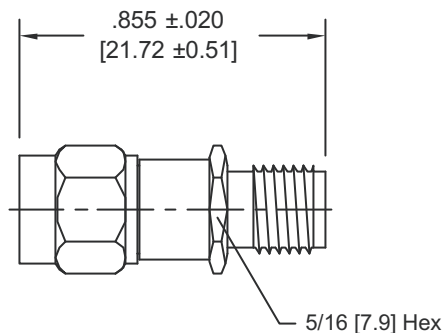

Model Number: **8057H**
Male / Male Connectors
Length = .980 ±.025 [24.89 ±0.64]

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

8055: REV F

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@aeroflex.com