



ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE: 0.010 - 18.000 GHz
 IMPEDANCE (NOMINAL): 50 OHMS
 VSWR (MAX): 1.35:1
 INSERTION LOSS (dB): 0.4 TYP/0.5 MAX.
 VOLTAGE RATING: 200 Volts MAX.
 POWER (AVG): 100 Watts
 (PEAK): 200 Watts

MECHANICAL SPECIFICATIONS

CONNECTORS: STAINLESS STEEL, PASSIVATE
 CONNECTOR PINS: BERYLLIUM COPPER, GOLD PLATE
 CONNECTOR INTERFACE TORQUE: 8± 1 IN-LBS
 INSULATORS: PTFE
 TEMPERATURE RANGE: -55°C TO +85°C
 WEIGHT (NOMINAL): 0.29 OZ

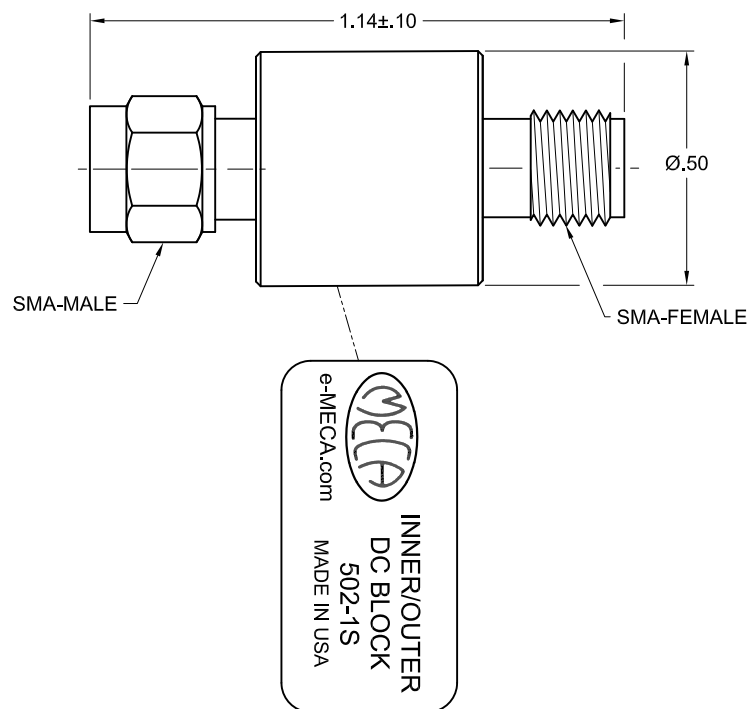

EXPORT CONTROL CLASSIFICATION NUMBER (ECCN): EAR99

						MATERIAL: SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES		 ELECTRONICS, INC. DENVILLE, NEW JERSEY e-MECA.com					
F		SEE DCN #240513-1	05/15/24	NL	RR	FINISH: SEE ABOVE		TOLERANCES 2 PLACES: ±.02 3 PLACES: N/A ANGLES: N/A							
E		SEE DCN #240207	02/07/24	NL	RR					DRAWN: NL DATE: 03/08/07		TIR: N/A		TITLE DC BLOCK, INNER/OUTER, TYPE SMA	
D		SEE DCN #110315-2	03/17/11	JT	EB										
C		SEE DCN # 071211-10	12/12/07	GQ	RR	APPROVED: RR		DATE: 03/08/07							
LTR	PG	DESCRIPTION	DATE	DR	APP					SIZE A					
								SCALE: NTS							
								SHEET: 1 OF 1							