
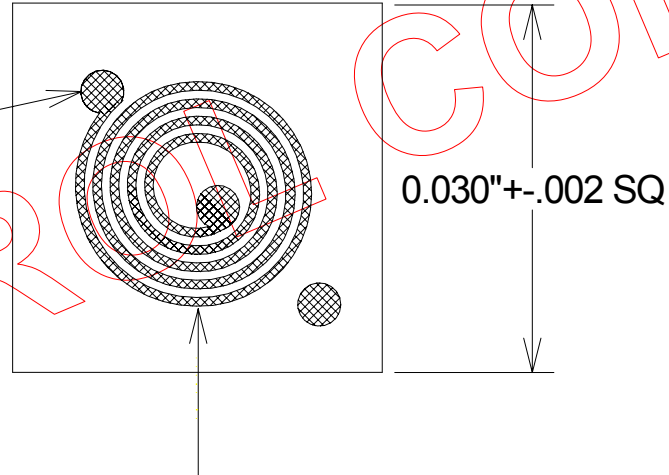


THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MICROSEMI CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS OF MANUFACTURE OR SALE OF APPARATUS WITHOUT EXPRESS WRITTEN AUTHORIZATION FROM MICROSEMI CORPORATION.

LTR	DESCRIPTION	DWN/DATE	APPD/DATE
-	INITIAL RELEASE	PS 1/16/98	EJS 1/21/98
A	ECO# 3595 T	PS 4/9/98	EJS 4/13/98
B	SAO#	PJB 07/31/01	

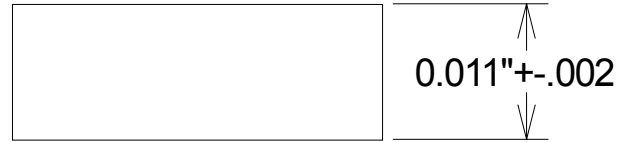

BONDING PAD
0.0035"±.0006
3 PLS

TRACE WIDTH
0.0007" TYP

CONTRACT COPY

		<small>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES DIM & TOL PER USA STD Y 14.5 DIM APPLY AFTER PROCESSING</small> <small>-TOLERANCES-</small> 2 PLACE DEC ±.01 FRAC ±1/64 3 PLACE DEC ±.005 DEG ±1/2° <small>SURFACE ROUGHNESS</small> PER USA STD B46.1 6.3 <small>PART SHALL BE FREE OF BURRS DO NOT SCALE TO PRINT</small>	DWN	PS	DATE	SPIRAL INDUCTOR 4.5 TURNS			
			CHKR		DATE				FILE NAME
			ENGR	JDH	DATE	SIZE	CODE IDENT NO.	DRAWING NO.	REV
			MFG	CR	DATE	A	50101	743-202-06	B
			QA	RAB	DATE	SCALE			SHEET 1 OF 1
					1/19/98				
			MATERIAL:	QUARTZ					
			FINISH:	GOLD					
			APPLICATION						
			NEXT ASS'Y	USED ON					