


VX-816


Voltage Controlled Crystal Oscillator

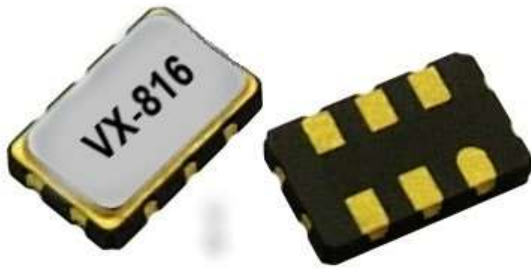


The VX-816 Voltage Controlled Crystal Oscillator

Features

- LVPECL
- Low jitter 58fs typ, 12kHz-20MHz
- +3.3V Operation
- Linearity $\leq 10\%$
- Tri-State Output
- 0/70 to -40/105 °C temp range
- Hermetically sealed ceramic SMD package

Product is compliant to RoHS directive  and fully compatible with lead free assembly (Excluding solder dipped, _SNPB, option)

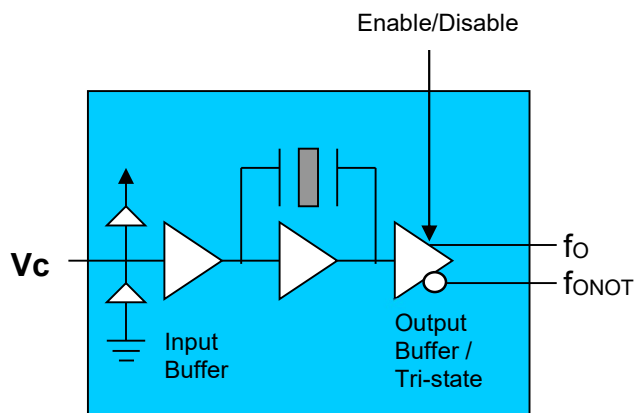

Applications

- 5G
- 1588, Synchronous Ethernet
- Frequency Translation
- Clock Clean-Up

Description

Vectron's VX-816 Voltage Controlled Crystal Oscillator (VCXO) is a quartz stabilized square wave generator with frequency adjustment for use in a PLL for clock clean-up and frequency applications.

VX-816 Voltage Controlled Crystal Oscillator

Performance Specifications

Table 1. Electrical Performance, LVPECL Output

Parameter	Symbol	Min	Typical	Maximum	Units
Frequency	f_o	100		250	MHz
Supply Voltage ¹	V_{DD}	2.97	3.3	3.63	V
Maximum Supply Voltage Non Operating		-0.3		4.5	
Supply Current	I_{DD}			81	mA
Output Logic Levels					
Output Logic High ²	V_{OH}	2.2			V
Output Logic Low ²	V_{OL}			1.8	V
Transition Times					
Rise Time ²	t_R			400	ps
Fall Time ²	t_F			400	ps
Load			50		Ohms
Tristate					
Output Enabled	V_{IN}	$0.7 \cdot V_{DD}$			V
Output Disabled	V_{IL}			$0.3 \cdot V_{DD}$	V
Duty Cycle ³	SYM	45	50	55	%
Test Conditions for APR	V_C	0.3		3.0	V
Maximum Control Voltage		-0.3		$V_{DD}+0.3$	
Absolute Pull Range, Ordering Option	APR	$\pm 30, \pm 50, \pm 100$			ppm
Gain Transfer		Positive			ppm/V
Input Impedance		10			MOhm
Control Voltage Bandwidth (-3dB)	BW	25			kHz
Phase Noise ⁴ 122.880MHz					dBc/Hz
10 Hz			-69		
100 Hz			-97		
1 kHz			-127		
10 kHz			-151		
100 kHz			-161		
1 MHz			-162		
10 MHz			-164		
20 MHz			-165		
Phase Jitter, 12kHz-20MHz			51		fs
Start-Up Time	T_{SU}			5	ms
Operating Temperature, Ordering Option		0/70, -10/70, -40/85, -40/105			°C
Package Size		7.0x5.0			mm

1. A 0.01uF and a 0.1uF capacitor should be located as close to the supply as possible (to ground) is recommended.

2. Figure 3 defines these parameters, tested under a Figure 2 conditions.

3. Duty Cycle is defined as on time divided by period, as defined in Figure 3.

4. Measured using an E5502B or equivalent at room temperature.




Figure 1


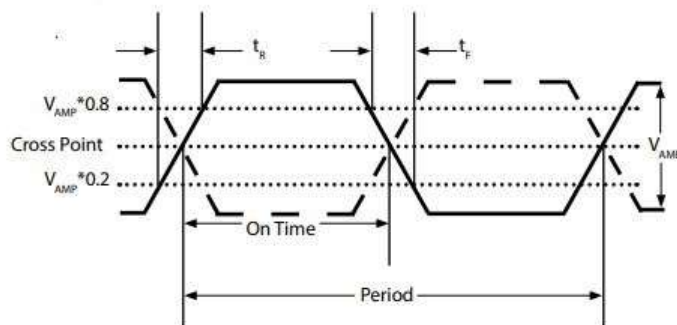


Figure 2

VX-816 Voltage Controlled Crystal Oscillator

Outline Diagram, Pad Layout and Pin Out

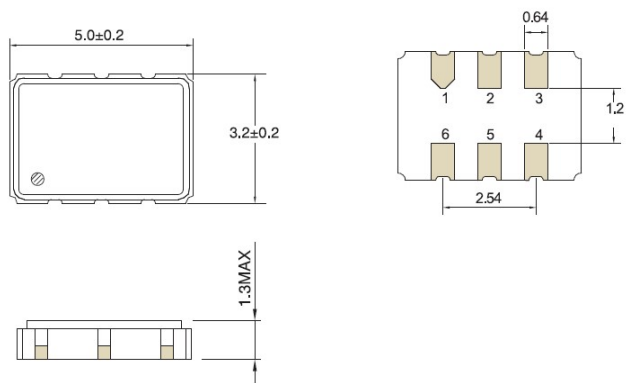

Marking

VX-816-XXX

XXXMXX

. YYWW T

where

VX-816-EAE = Part Number

XXXMXX = Frequency

YY = Year

WW = Week

. = Pin 1

Dimensions in mm




Table 2. LVPECL Pinout		
Pin #	Symbol	Function
1	V _C	VCXO Control Voltage
2	E/D	Logic low disables output Logic high or no connection enables output waveform
3	GND	Ground
4	f _O	Output Frequency
5	f _O NOT	Complementary Output
6	V _{DD}	Supply Voltage

Table 3. Enable/Disable Function	
E/D	Output
High	Clock Output(s)
Open	Clock Output(s)
Low	High Impedance

VX-816 Voltage Controlled Crystal Oscillator

Tape and Reel

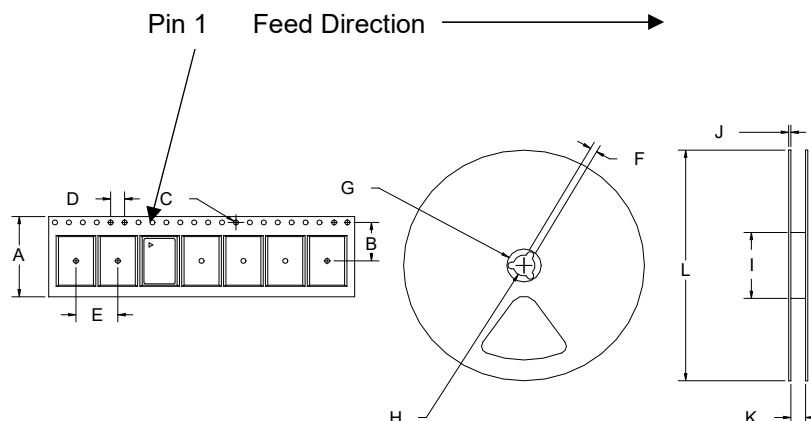


Table 4. Tape and Reel

Tape and Reel Dimensions (mm)

Tape Dimensions						Reel Dimensions							# Per Reel
Product	A	B	C	D	E	F	G	H	I	J	K	L	
VX-816	12	5.5	1.5	4	8	2	21	19	55	2	17	180	1000

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can permanently damage the device. Functional operation is not implied at these or any other conditions in excess of conditions represented in the operational sections of this data sheet. Exposure to absolute maximum ratings for extended periods may adversely affect device reliability.

Table 5. Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Storage Temperature	T _{storage}	-55/125	°C
Maximum Junction Temperature		150	°C

Reliability

The VX-815 is capable of meeting the following qualification tests.

Table 6. Environmental Compliance

Parameter	Conditions
Mechanical Shock	MIL-STD-883 Method 2002
Mechanical Vibration	MIL-STD-883 Method 2007
Solderability	MIL-STD-883 Method 2003
Gross and Fine Leak	MIL-STD-883 Method 1014
Resistance to Solvents	MIL-STD-883 Method 2016
Moisture Sensitivity Level	MSL1
Contact Pads	Gold (0.3um to 1.0um) over nickel, ENIG
Contact Pads _SNPB option	Tinned using SN63PB37 solder alloy in accordance with J-STD-006
Weight	57 mg

VX-816 Voltage Controlled Crystal Oscillator

Handling Precautions

Although ESD protection circuitry has been designed into the the VX-816, proper precautions should be taken when handling and mounting. Microchip employs a Human Body Model and a Machine Model (MM) for ESD susceptibility testing and design protection evaluation. ESD thresholds are dependent on the circuit parameters used to define the model. Although no industry wide standard has been adopted for the MM, a standard HBM of resistance = 1.5kohms and capacitance = 100pF is widely used and therefore can be used for comparison purposes.

Table 7. ESD Ratings

Model	Minimum	Conditions
Human Body Model	2000	EIAJ ED-4701/300
Machine Model	200	EIAJ ED-4701/300

The VX-816 is qualified to meet the JEDEC standard for Pb-Free assembly. The temperatures and time intervals listed are based on the Pb-Free small body requirements and parameters are listed in the table below. The contact pads are gold over nickel so lower IR reflow temperatures such as 220°C can be used (device is backwards compatible with a lead solder assembly). The VX-816 is hermetically sealed so an aqueous wash is not an issue.

NOTE: Devices which have been solder dipped, _SNPB, will not be Pb-free.

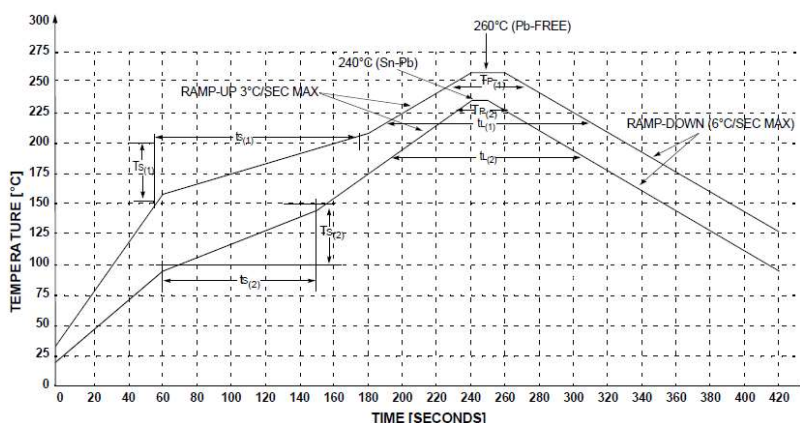


Table 8. Reflow Profile (IPC/JEDEC J-STD-020)

Symbol	Min – Max, C	Conditions
$T_{s(1)}$	150 ~ 200	Pb-free Option
$T_{s(2)}$	100 ~ 150	_SNPB Option
$t_{s(1)}$	60 ~ 180	Pb-free Option
$t_{s(2)}$	60 ~ 120	_SNPB Option
$t_{l(1)}$	60 ~ 150	Pb-free Option
$t_{l(2)}$	60 ~ 150	_SNPB Option
$T_{p(1)}$	245 ~ 260	Pb-free Option
$T_{p(2)}$	225 ~ 240	_SNPB Option

Ordering Information

VX-816-ECE-KEAN-125M000000xx

Product

VCXO, 5.0x3.2mm Ceramic

Voltage

E = +3.3V

Output

C = LVPECL

Temperature Range

T = 0/70°C

W = -10/70°C

E = -40/85°C

F = -40/105°C

Absolute Pull Range

G = ±30 ppm APR

K = ±50 ppm APR

S = ±100 ppm APR

Packaging

TR = Tape and Reel

Blank = Cut Tape / non TR Quantities

_SNPB = Tin Lead Solder Dipped

Frequency in MHz**Other (Other)**

N = Standard

Enable Disable Logic

A = Output Enabled Logic High or Open

X = No E/D Feature

Temperature Stability

X = Standard

E = ±20 ppm

VX-816 Voltage Controlled Crystal Oscillator

Revision History		
Date	Approved	Description
June 07, 2024		Review



Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATION OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING, BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly, or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip and Vectron names and logos are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.