

Features

- Frequency Range 1 – 250 MHz
- Low Cost
- Industry Standard SMT package
- Available in Tape-and -Reel
- 75 Ohms Characteristic Impedance

Description

The SPA-0301-27 is a 0° In-phase two way power splitter designed for applications that require small, low cost and highly reliable surface mount components. Applications may be found in broadband, wireless and other communications systems.


S-Parameters are available on request.

Specifications


Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1		250
Insertion Loss (dB)		0.5	1.0
Isolation (dB)	20	24	
Return Loss (dB)		23	17.7
Amplitude Balance (dB)		0.1	0.6
Phase Balance (Degrees)		0.5	1.5

Note: Typical values represent Mid-band performance @ 25°C.

Schematic

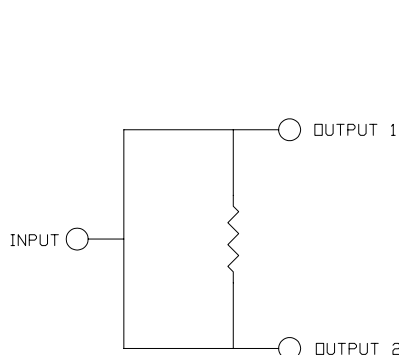

Package – S06

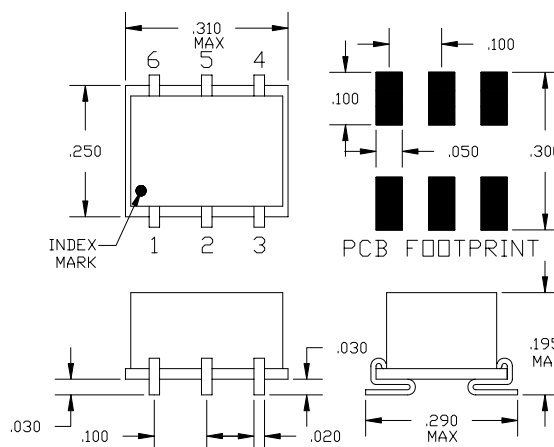


Absolute Maximum Ratings

Parameter	Maximum
RF Power	+33 dBm
Operating Temperature	-55 to +100 °C
Storage Temperature	-55 to +100 °C
Re-flow Temperature	+ 240 °C


Pin Functions

Function	Pin
INPUT	1
OUTPUT 1	3
OUTPUT 2	4
GROUND	2,5,6

Typical Test Data – Insertion Loss and Amplitude Balance

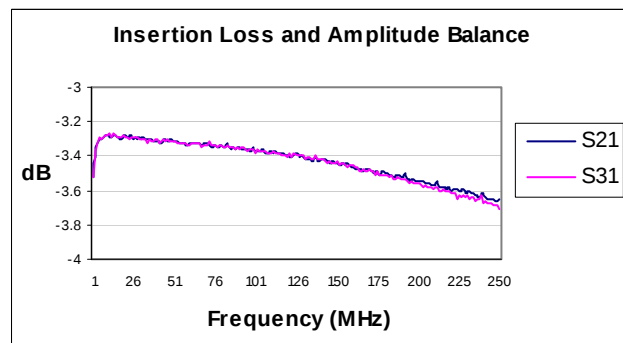

Typical Test Data – Return Loss and Output Isolation

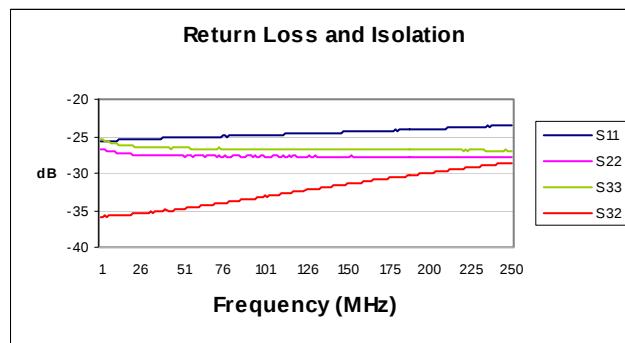

Specifications and information on this data sheet are subject to change without notice..