

Features

- Frequency Range 1700 – 2500 MHz
- Low Cost
- Industry Standard SMT package
- Available in Tape-and -Reel
- 50 Ohms Characteristic Impedance

Description

The SPA-2501-25 is a 0° In-phase two way power splitter designed for applications that require small, low cost and highly reliable surface mount components. Applications may be found in broadband, wireless and other communications systems.


S-Parameters are available on request.

Specifications


Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1700		2500
Insertion Loss (dB)		0.8	1.4
Isolation (dB)	16	25	
Return Loss (dB)		14	9.8
Amplitude Balance (dB)		0.2	0.5
Phase Balance (Degrees)		3.0	9.0

Note: Typical values represent Mid-band performance @ 25°.


Schematic

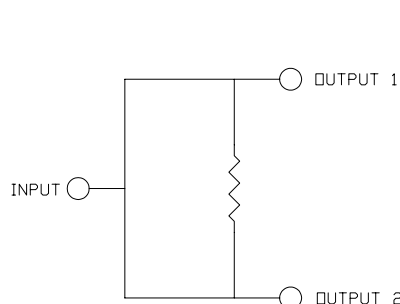


Package – S06

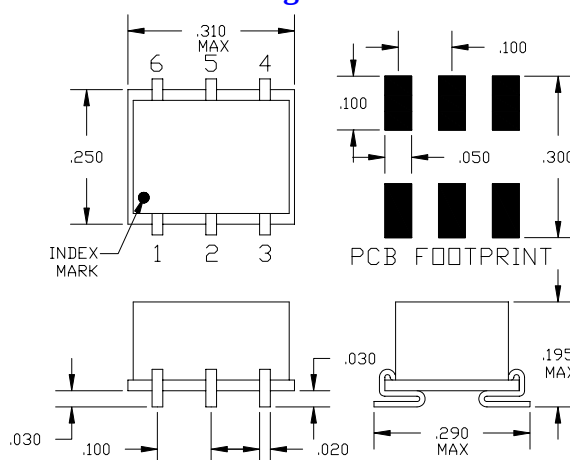

Typical Test Data – Insertion Loss and Amplitude Balance

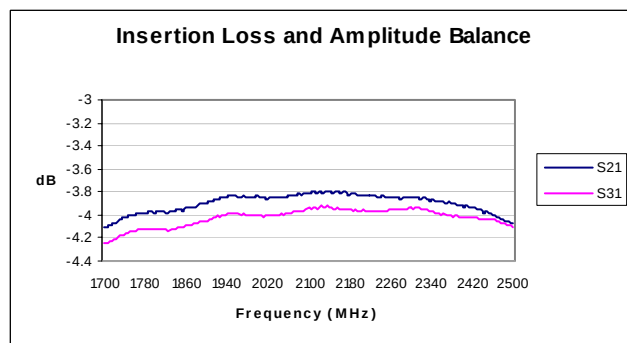

Typical Test Data – VSWR and Output Isolation

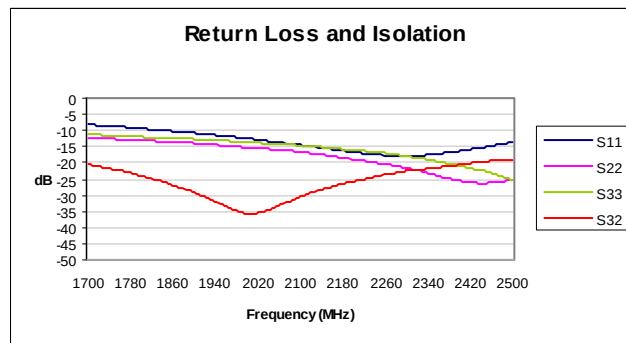

Specifications and information on this data sheet are subject to change without notice..

SURFACE MOUNT 2-WAY SPLITTER



Absolute Maximum Ratings

Parameter	Maximum
RF Power	+33 dBm
Operating Temperature	-55 to +100 °C
Storage Temperature	-55 to +100 °C
Re-flow Temperature	+ 240 °C

Pin Functions

Function	Pin
INPUT	1
OUTPUT 1	3
OUTPUT 2	4
GROUND	2,5,6