
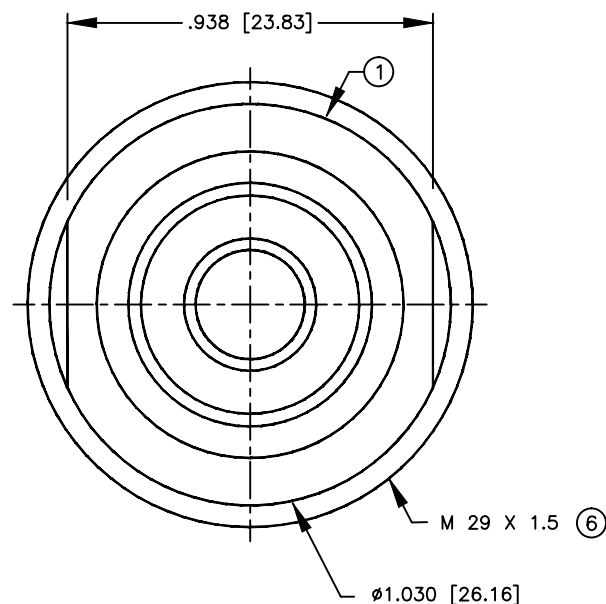


SPECIFICATION CONTROL DRAWING

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, LTD. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	KMM	7/21/97	R. RICE
B	GROUND RING NOW PHOS BRONZE	CZS	11/10/98	R. RICE

ALL DIMENSIONS ARE REFERENCE ONLY

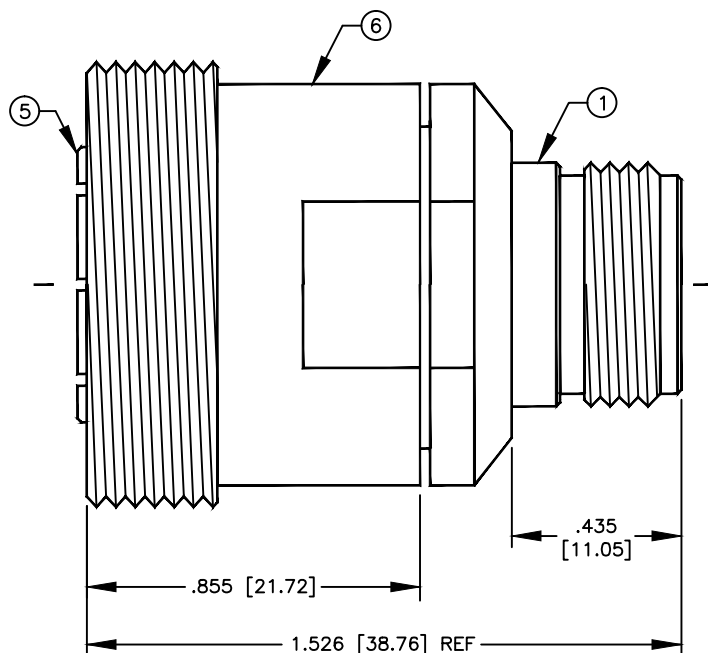

SPECIFICATIONS

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: DC-7.5 GHz
 INSERTION LOSS: -.01 dB $\sqrt{\text{FREQUENCY GHz}}$
 VSWR MAX: <1.10:1 @ DC-7.5 GHz
 3rd ORDER IM -dBc: >-150 dBc
 INTERFACE PER ITL-SPEC-CECC-22190

DIMENSIONS ARE IN INCHES
 AND [MILLIMETERS]

UNLESS OTHERWISE NOTED
 TOLERANCES ARE:

DECIMALS DIAMETER

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (619)549-6340
 (619)549-6345 FAX

RFD-1673-2

7-16 DIN FEMALE TO N FEMALE ADAPTER

6	BODY, DIN F	001-16F0001BE	1	BRASS	SILVER
5	GROUND RING	014-16F0001PE	1	PHOS BRONZE	SILVER
4	DIELECTRIC	010-16X0001TX	1	PTFE	NONE
3	CONTACT, N	008-10F0006CE	1	BeCu	SILVER
2	CONTACT, DIN	008-16F0001CE	1	BeCu	SILVER
1	BODY, N	001-10F0003BE	1	BRASS	SILVER
ITEM	DESCRIPTION	PART NUMBER	QTY	MATERIAL	FINISH

DRAWN C. ZUNIGA	11/10/98
CHECKED	
ORJ DRAWN K. MAXWELL	7/21/97
APPROVALS	DATE

SIZE A	CABLE GROUP N/A	DWG NO. 8729	REV B
SCALE: 2:1	CAD FILE 13ARC B	SHEET 1 OF 1	