


Part No.	BEF63R2140S60C
Date	2022-11-29

Written	Checked	Approved
C.H.Lee		

1. Electrical Specifications.

ITEM	
Reject Frequency	2140 MHz
Insertion Loss in BW	3.0 dB max. @ 2060 & 2220 MHz
In/Out Impedance	50 Ω
Peak Power	1 W max.
Attenuation	20 dB min. @ 2110 ~ 2170 MHz
Operation Temperature	-20°C ~ +85°C

2. Dimensions.

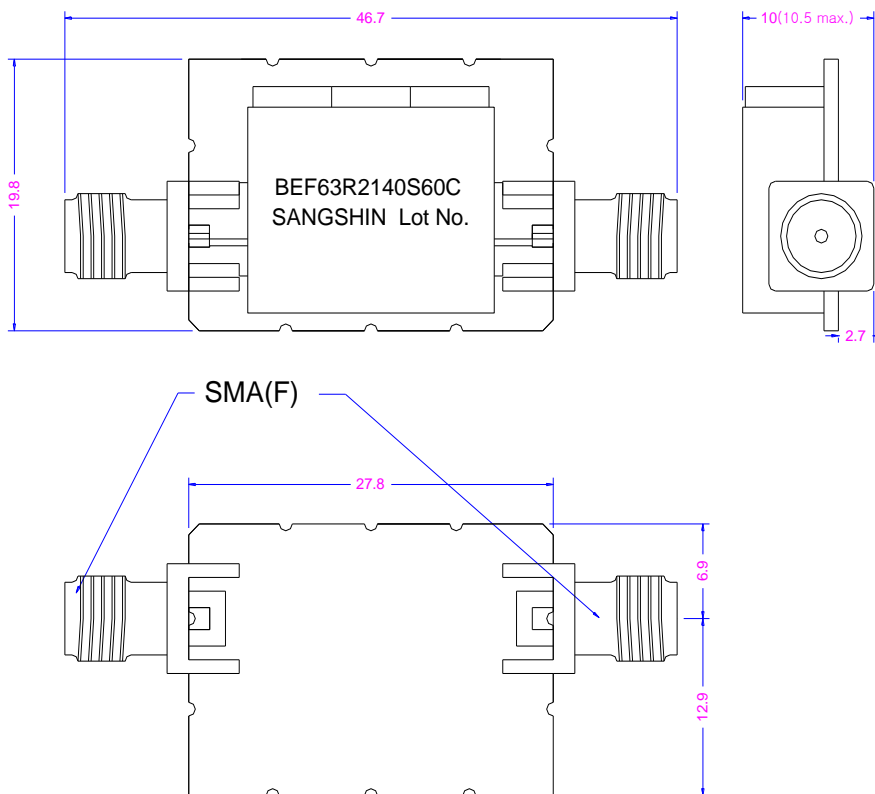


Tolerance Unless Otherwise specified : +/- 0.3

3. Data

11/28/2022 4:21:29 PM
1328.5170K92-100281-AM

Trc1 — S21 dB Mag 10 dB/ Ref 0 dB Cal int Trc2 — S11 dB Mag 5 dB/ Ref 0 dB Cal int 1 ∨
Trc3 — S22 dB Mag 5 dB/ Ref 0 dB Cal int

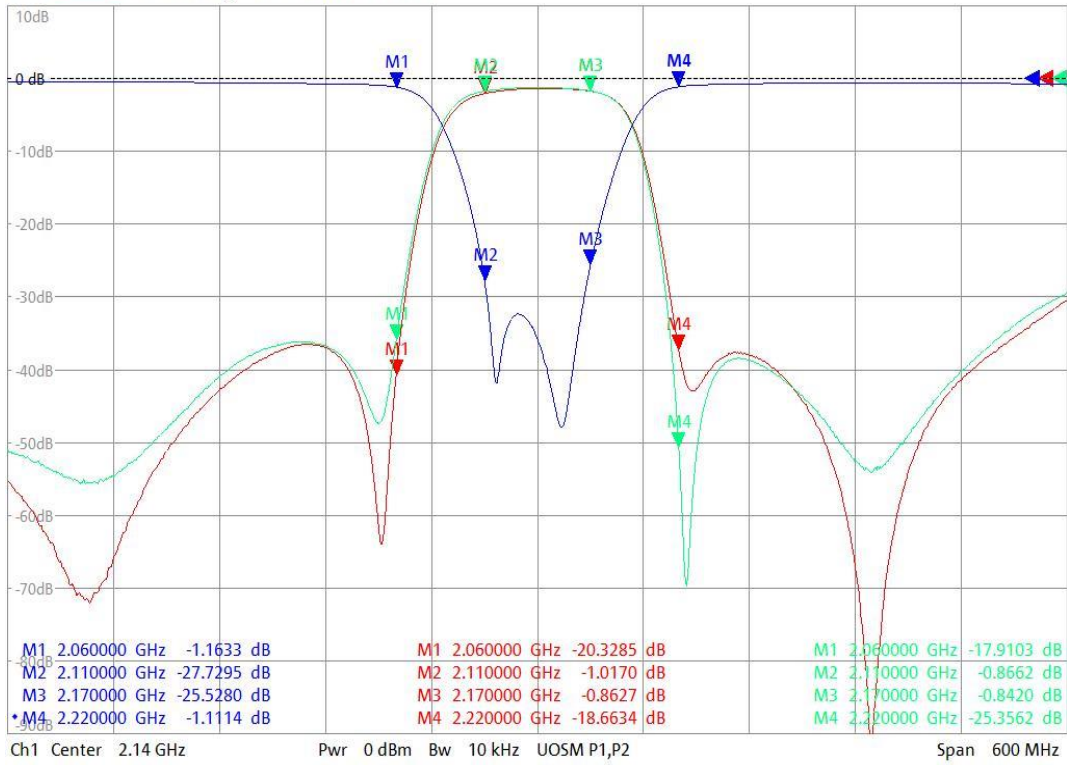

11/28/2022 4:22:51 PM
1328.5170K92-100281-AM

Trc1 — S21 dB Mag 10 dB/ Ref 0 dB Cal int Trc2 — S11 dB Mag 5 dB/ Ref 0 dB Cal int 1 ∨
Trc3 — S22 dB Mag 5 dB/ Ref 0 dB Cal int

