


Part No.	BEF94MS28A
Date	2023.04.17

Written	Checked	Approved
N.R		

1. Electrical Specifications.

ITEM	Specifications
Rejection center Frequency (= FR)	94 MHz
Pass Band-width (= BW 1)	10 ~ 70 MHz
Pass Band-width (= BW 2)	130 ~ 2500 MHz
Insertion Loss in BW 1	4.0 dB max.
Insertion Loss in BW 2	4.0 dB max.
Ripple in BW 1 & 2	3.5 dB max.
Return Loss in BW 1	14 dB min.
Return Loss in BW 2	13 dB min.
In/Out Impedance	50 Ω
Peak Power	5 W max.
Attenuation	20 dB min. @ 80 ~ 108 MHz
Operation Temperature	-40°C ~ +85°C

2. Dimensions.

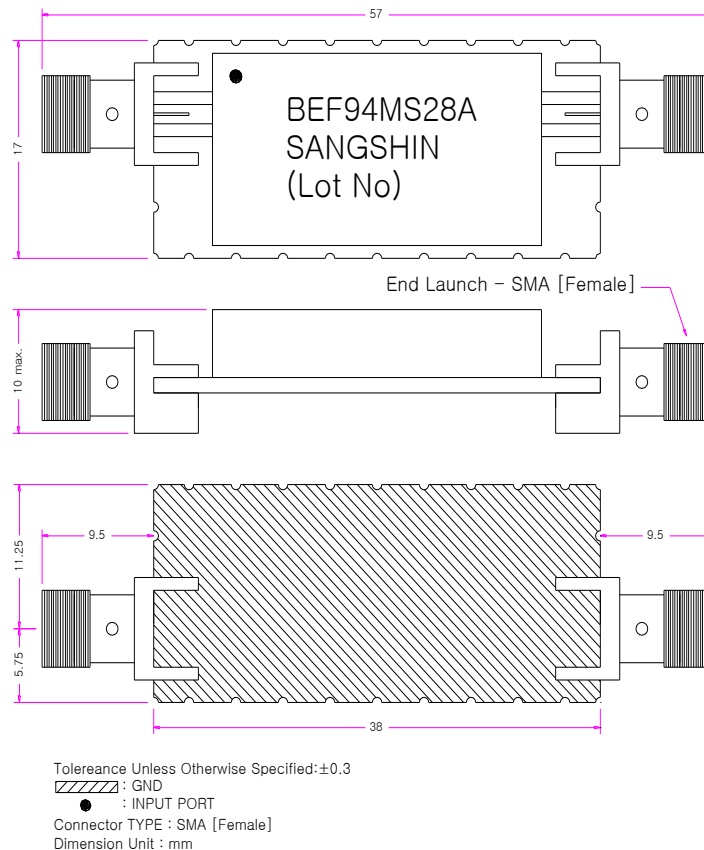

3. Simulation data.

