


Customer	RFMW
Part No.	MBP33RC6162S525A
Date	June 15, 2009

Written by	Checked by	Approved by
T.W.Kim		

1. Electrical Specifications.

Item	Specifications
Center Frequency (= Fc)	6162.5 MHz
Pass Bandwidth (= BW)	5900 ~ 6425 MHz
Insertion Loss @ BW	2.0 dB max.
Ripple @ BW	1.0 dB max.
Return Loss @ BW	12 dB min.
In, Output Impedance	50 Ω
Input Power	1 W max.
Attenuation	25 dB min. @ 5475 MHz 30 dB min. @ 4950 MHz 35 dB min. @ 4425 MHz
Operation Temperature Range	-40°C ~ +85°C


2. Dimensions.

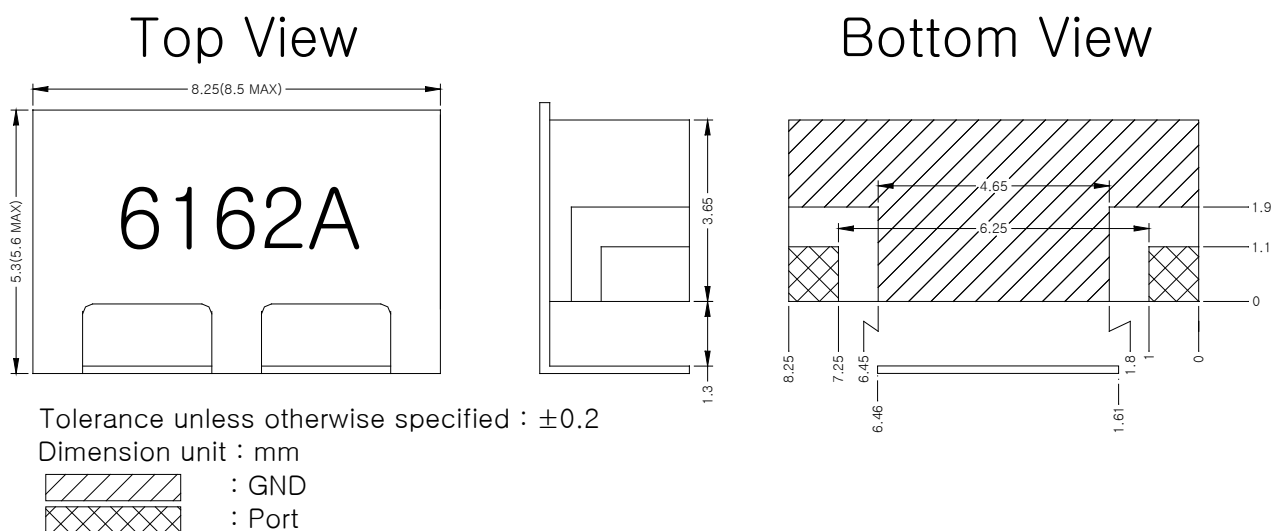

Customer	RFMW
Part No.	MBP33RC6162S525A
Date	June 15, 2009

Written by	Checked by	Approved by
T.W.Kim		

3.Data

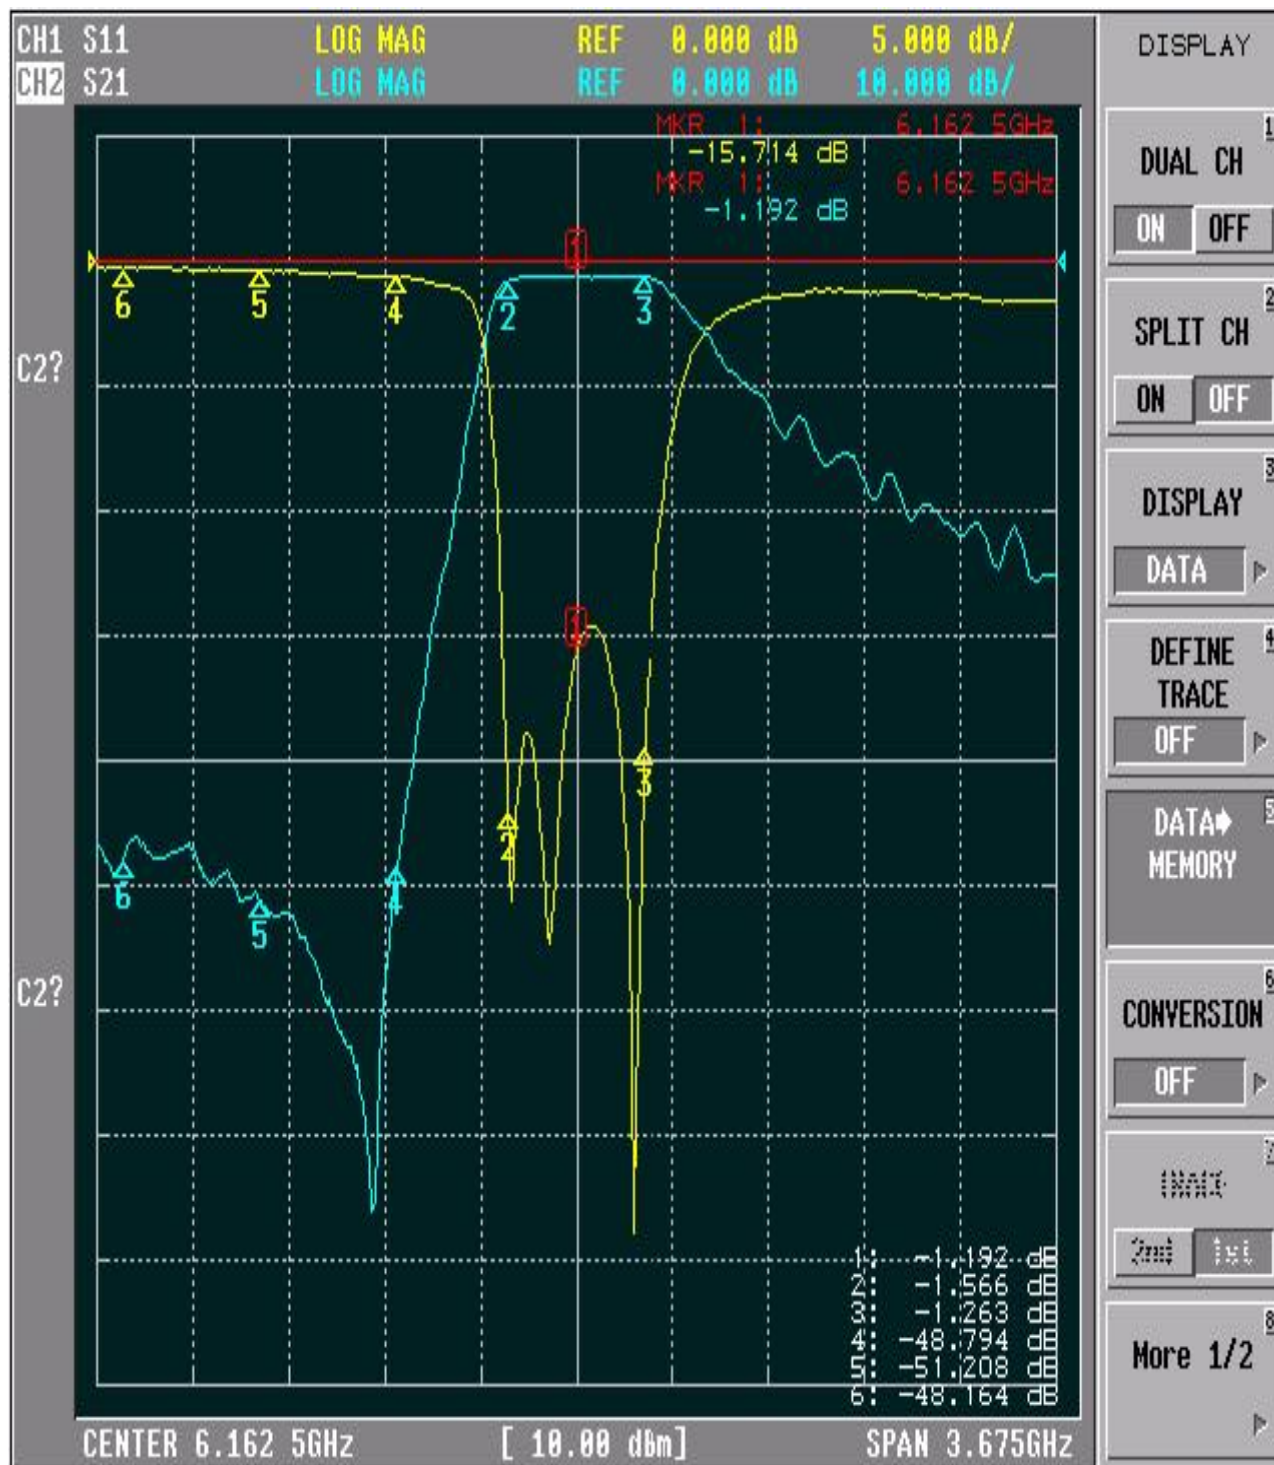

Dielectric Filter Sample Specification

Customer	RFMW
Part No.	MBP33RC6162S525A
Date	June 15, 2009

Written by	Checked by	Approved by
T.W.Kim		

4. Footprint

