


Customer RFMW

Part No. MBP44RC1030S15C

Date 2016-03-08

Written	Checked	Approved
김미현		




1. Electrical Specifications.

ITEM	Specifications
Center Frequency(= Fc)	1030
Pass Band-width (= BW)	$F_c \pm 7.5 \text{ MHz}$ (1022.5 ~ 1037.5 MHz)
I.L in BW	2.8 dB max.
Ripple in BW	1.0 dB max.
Return Lose in BW	15 dB min.
In/Out Impedance	50 Ω
Maximum Power	1 W max.
Attenuation	37 dB min. @ 980 MHz
	37 dB min. @ 1080 MHz
Operation Temperature	-40°C ~ +85°C
Storage Temperature	-55°C ~ +85°C

2. Dimensions.


Top View

Bottom View

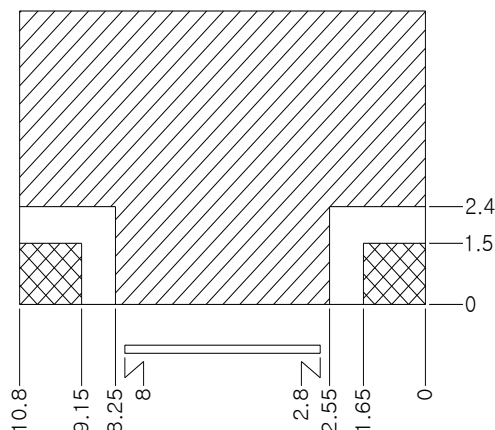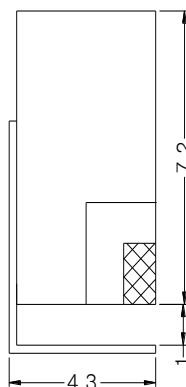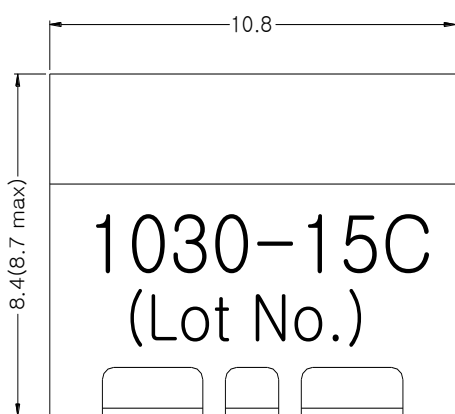


Tolerance unless otherwise specified : ± 0.15

Dimension unit : mm



3. Data.

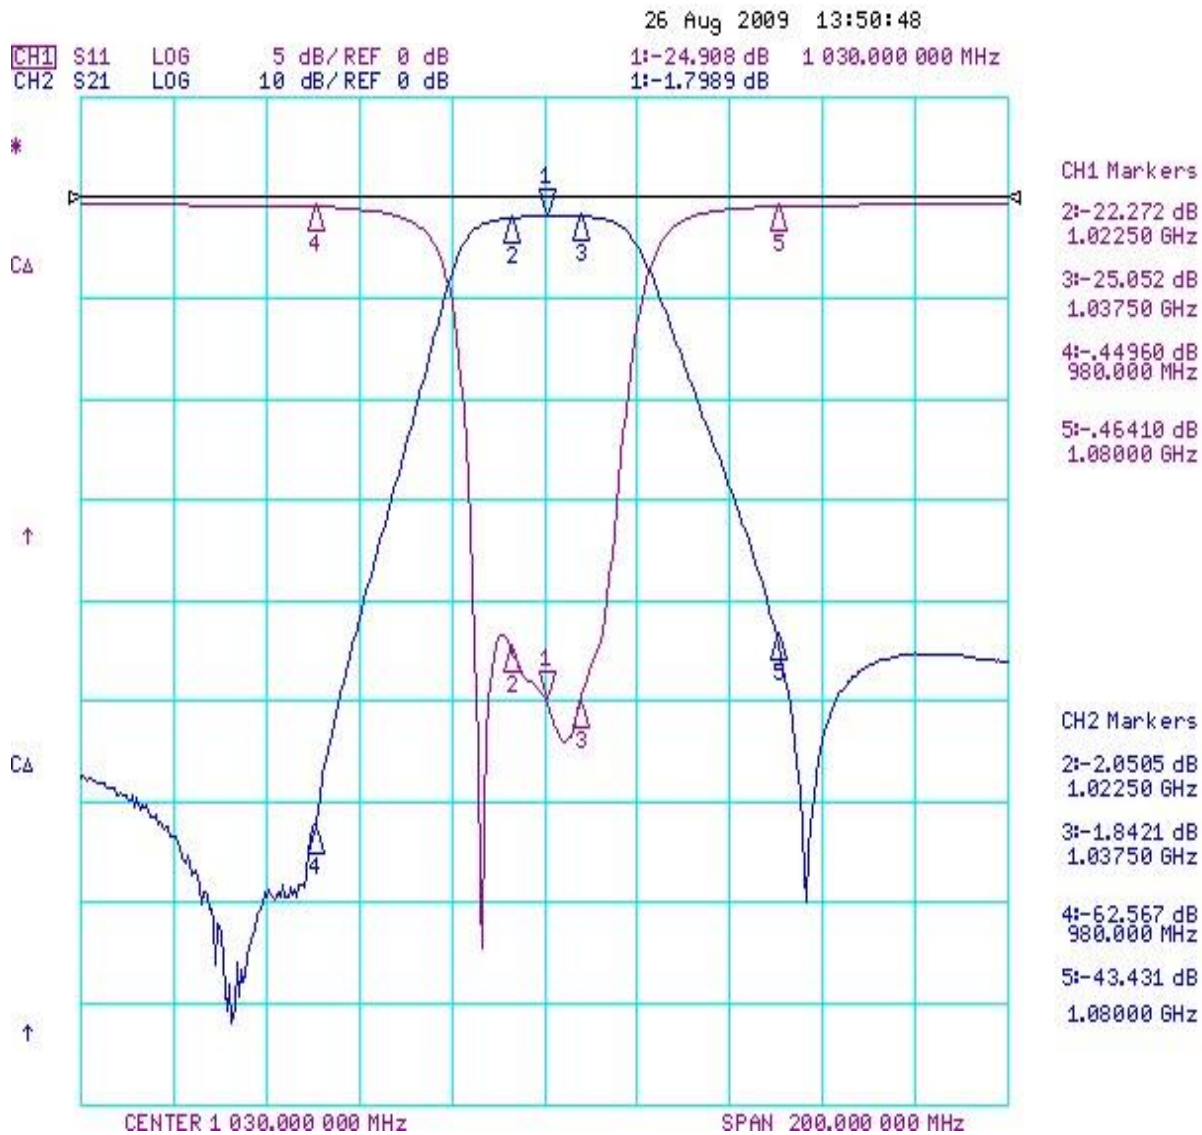

4. Footprint

