


C2AG23

2.7 to 3.1 GHz Drop-in Circulator

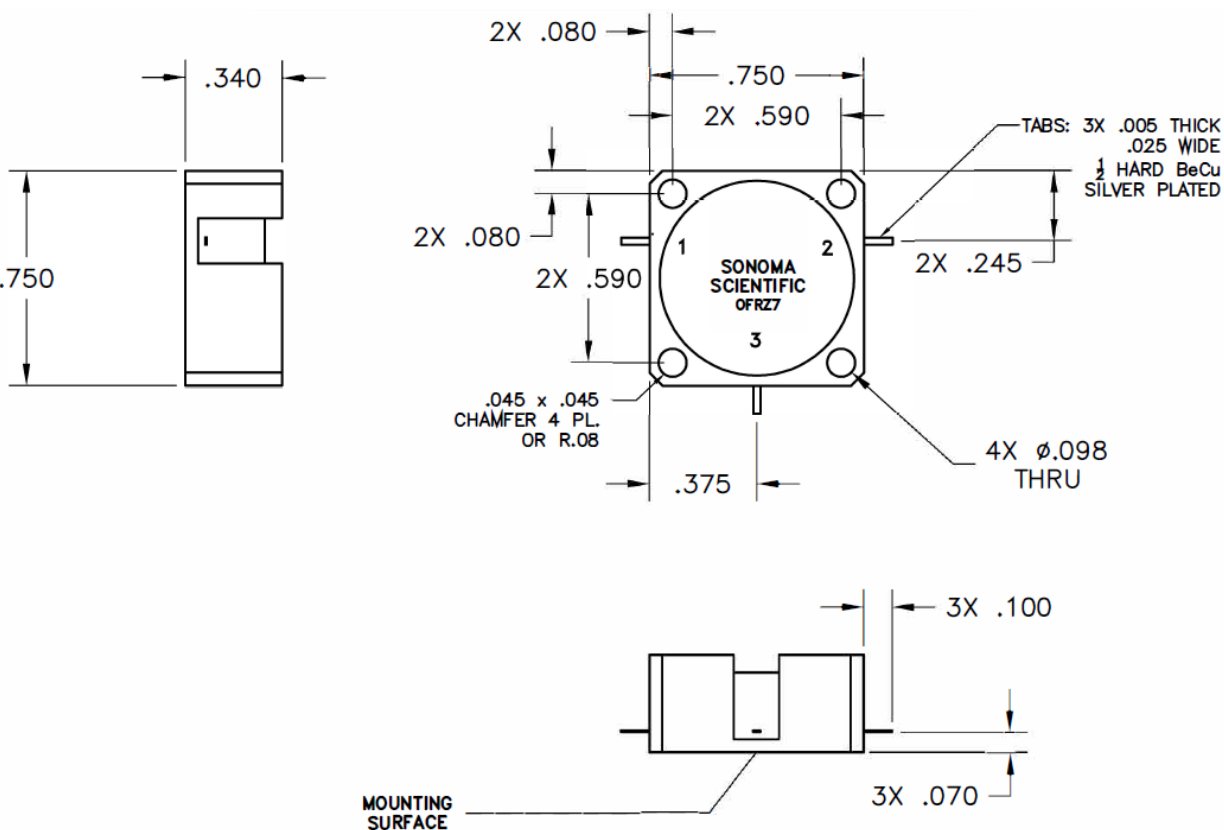

Electrical Specifications

Frequency	2.7 – 3.1 GHz
Isolation (Min)	20 dB
Insertion Loss (Max)	0.2 dB
VSWR (Max)	1.22:1
Forward Power Handling	75 W Avg, 750 W Pk
Reverse Power Handling	75 W Avg, 750 W Pk
Operating Temperature	+10 °C to +40 °C
Direction of Rotation	Clockwise

Mechanical Specifications

Size	0.75 x 0.75 x 0.34 in
Connector Type	Tabs
Connector Configuration	Copper
Material	Steel
Finish	Nickel

Unless otherwise specified:
Dimensions are in inches.
.xx ± .01, .xxx ± .005

