


C2AR25

2.4 to 2.5 GHz Drop-in Circulator

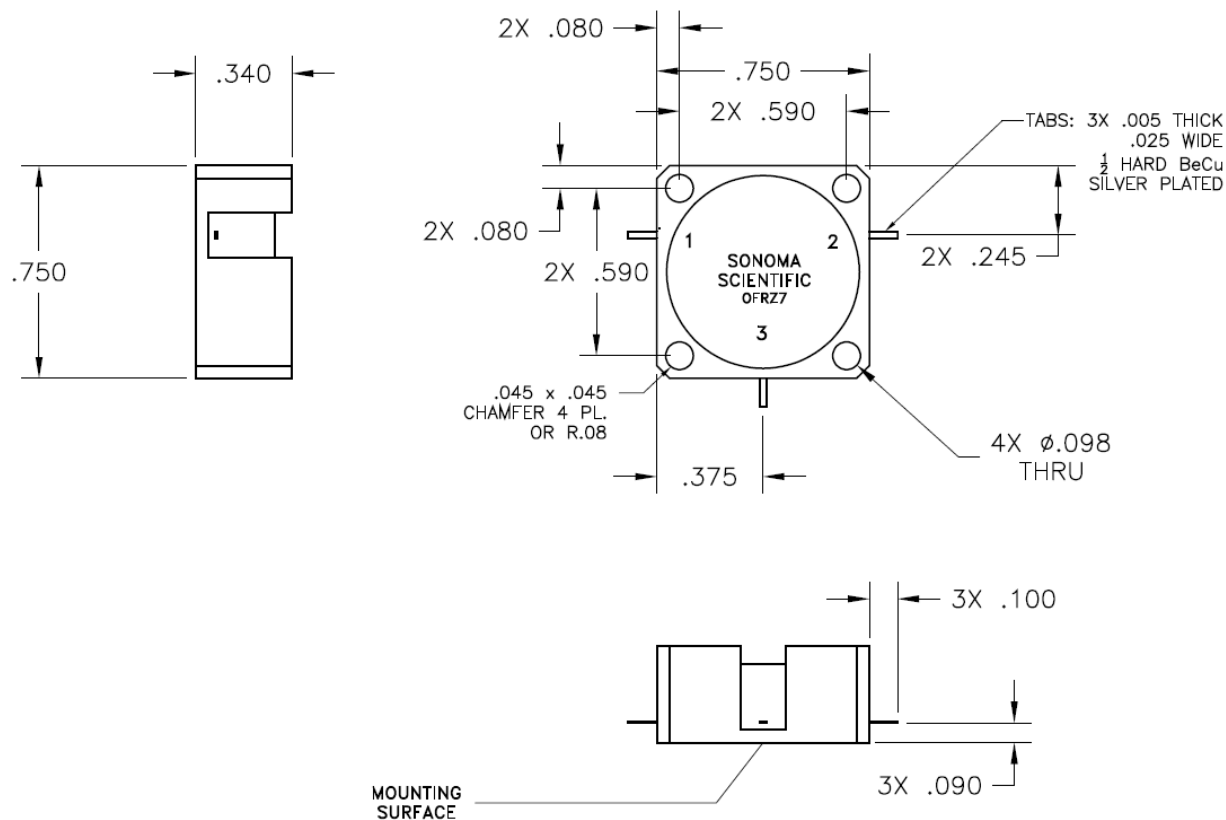

Electrical Specifications

Frequency	2.4 – 2.5 GHz
Isolation (Min)	20 dB
Insertion Loss (Max)	0.25 dB
VSWR (Max)	1.22:1
Forward Power Handling	75 W Avg, 1.5 kW Pk
Reverse Power Handling	75 W Avg, 1.5 kW Pk
Operating Temperature	-30 °C to +70 °C
Direction of Rotation	Clockwise

Mechanical Specifications

Size	0.750 x 0.750 x 0.340 in
Connector Type	Tabs
Connector Configuration	Copper
Material	Steel
Finish	Nickel

Unless otherwise specified:

Dimensions are in inches.

.xx ± .01, .xxx ± .005

