


T4YX4

4.50 to 5.25 GHz Microstrip Isolator

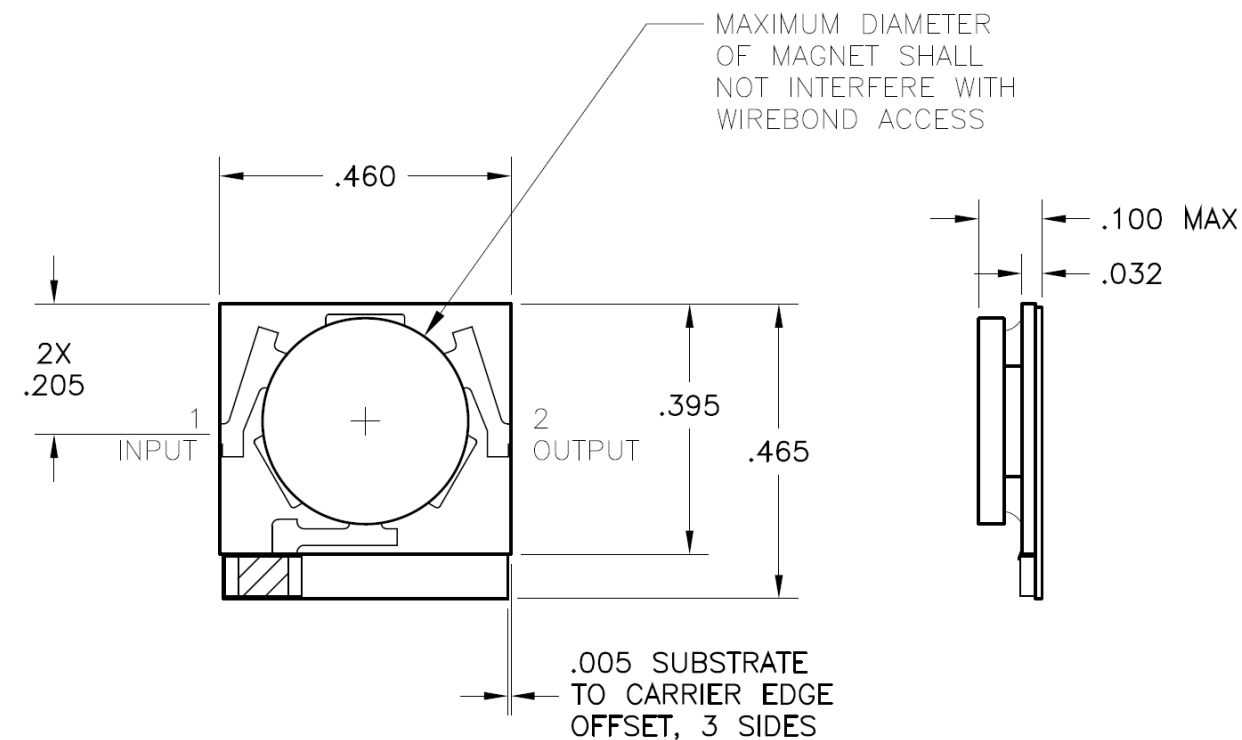

Electrical Specifications

Frequency	4.50 – 5.25 GHz
Isolation (Min)	18 dB
Insertion Loss (Max)	0.4 dB
VSWR (Max)	1.28:1
Forward Power Handling	10 W Avg, 100 W Pk
Reverse Power Handling	20 W
Operating Temperature	-25 °C to +80 °C
Direction of Rotation	Clockwise

Mechanical Specifications

Size	0.460 x 0.465 x 0.100 in
Connector Configuration	Microstrip
Material	Kovar / Ferrite
Finish	Silver Plated Carrier

Unless otherwise specified:

Dimensions are in inches.

.xx ± .01, .xxx ± .003

