


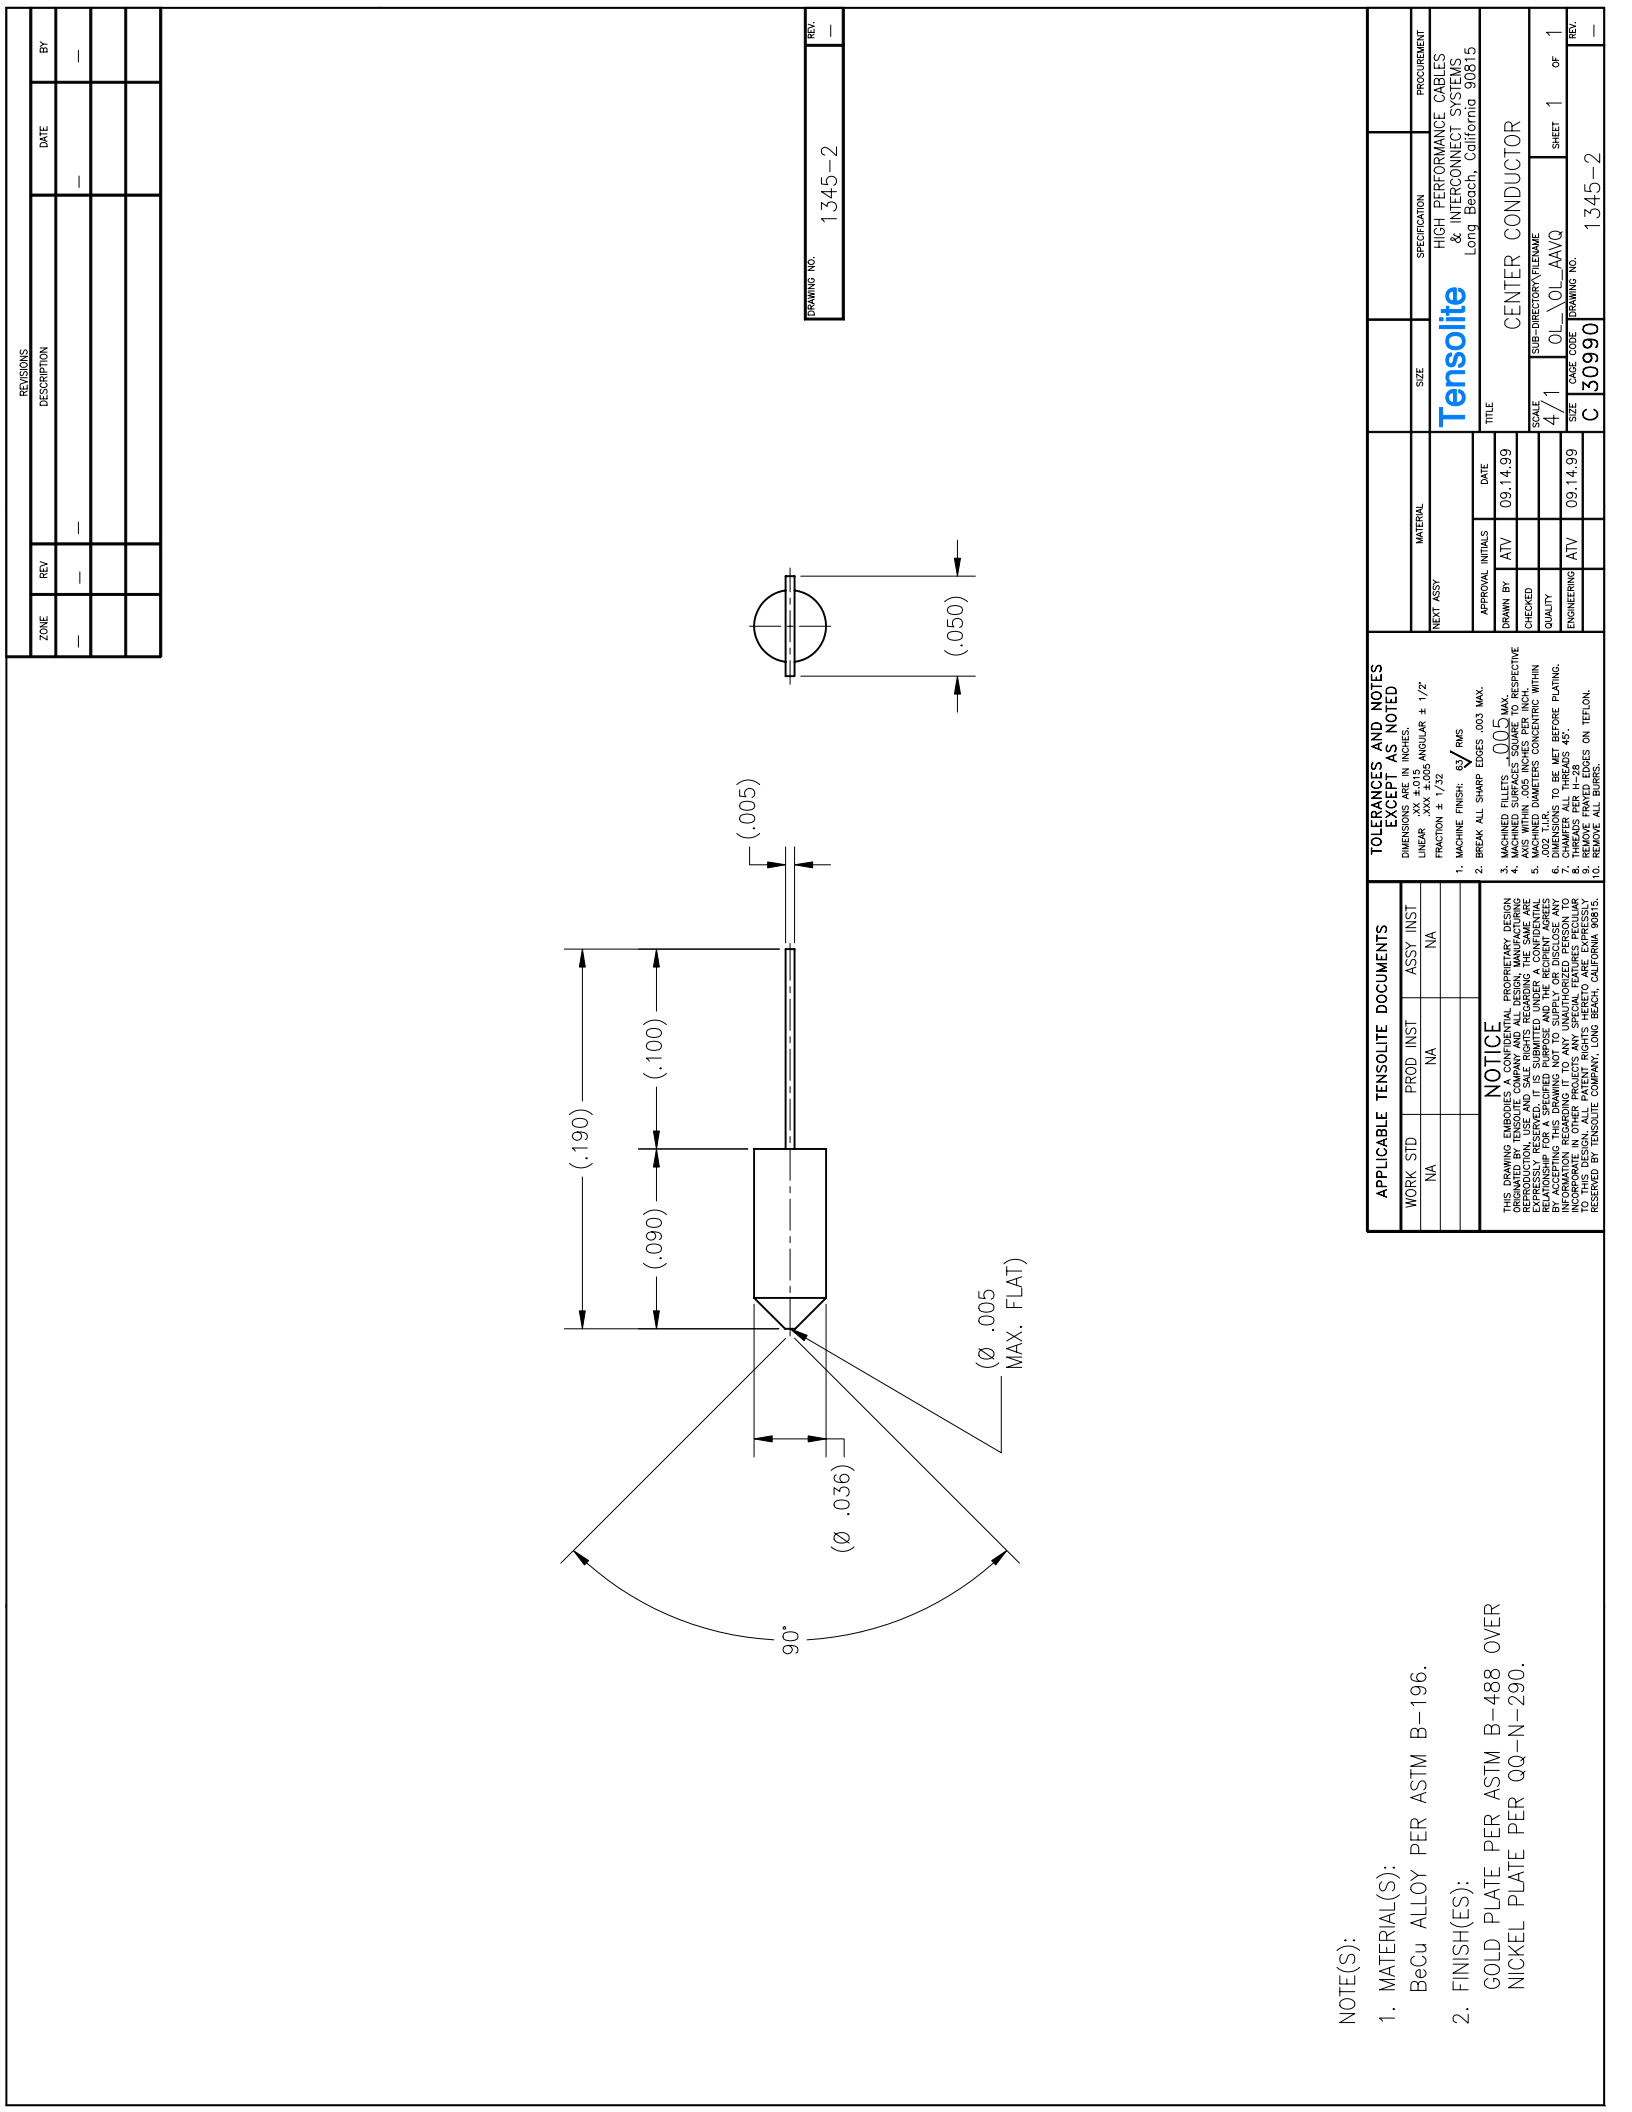

NOTE(S):

1. MATERIAL(S):
BeCu ALLOY PER ASTM B-196.

2. FINISH(ES):
GOLD PLATE PER ASTM B-488 OVER
NICKEL PLATE PER QQ-N-290.

REVISIONS							
ZONE	REV	DESCRIPTION	DATE	BY			
—	—	—	—	—			
—	—	—	—	—			
—	—	—	—	—			
—	—	—	—	—			

DRAWING NO.	REV.
1345-2	—

APPLICABLE TENSOLITE DOCUMENTS				TOLERANCES AND NOTES EXCEPT AS NOTED			
WORK STD	PROD INST	ASST INST		DIMENSIONS ARE IN INCHES	MATERIAL	SIZE	PROCUREMENT
NA	NA	NA	NA	LINEAR .XX ±.015 ANGULAR ± 1/2			
				FRACTION ± 1/32			
				1. MACHINE FINISH $\sqrt{64}$ RMS			
				2. BREAK ALL SHARP EDGES .003 MAX.			
				3. MACHINED FILLETS .005 MAX.			
				4. MACHINED SURFACES SQUARE TO RESPECTIVE AXIS WITHIN .005 INCHES PER INCH			
				5. .002 T.I.R. TO BE MAINTAINED CONCERNING WITHIN .005 INCHES PER INCH			
				6. CHAMFERS TO BE SET TO .005 INCHES PER INCH			
				7. CHAMFERS TO BE SET TO .005 INCHES PER INCH			
				8. THREADS PER H-28			
				9. REMOVE ALL BURRS			
				10. REMOVE ALL BURRS			

TITLE	DATE	APPROVAL INITIALS	DRAWN BY	CHECKED	QUALITY	ENGINEERING	SIZE	CAGE CODE	DRAWING NO.	REV.
Tensolite	09.14.99	ATV	ATV			ATV	4/1	C	30990	—
HIGH PERFORMANCE CABLES & INTERCONNECT SYSTEMS										
Long Beach, California 90815										
CENTER CONDUCTOR										
SUB-DIRECTORY/NAME										
OL-OL-AAVQ										
SHEET 1 OF 1										

THIS DRAWING IS THE PROPERTY OF TENSOLITE, INC. AND IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF TENSOLITE, INC. TENSOLITE, INC. IS NOT RESPONSIBLE FOR THE ACCURACY OF THE INFORMATION PROVIDED IN THIS DRAWING. TENSOLITE, INC. IS NOT RESPONSIBLE FOR THE ACCURACY OF THE INFORMATION PROVIDED IN THIS DRAWING. TENSOLITE, INC. IS NOT RESPONSIBLE FOR THE ACCURACY OF THE INFORMATION PROVIDED IN THIS DRAWING.