
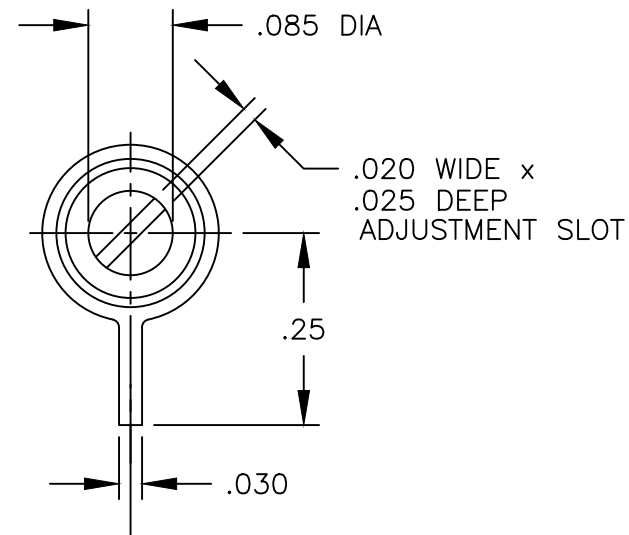


DATE	SYM	REVISION RECORD	AUTH	DR	CK
9/28/21	A	INITIAL RELEASE		MI	MI

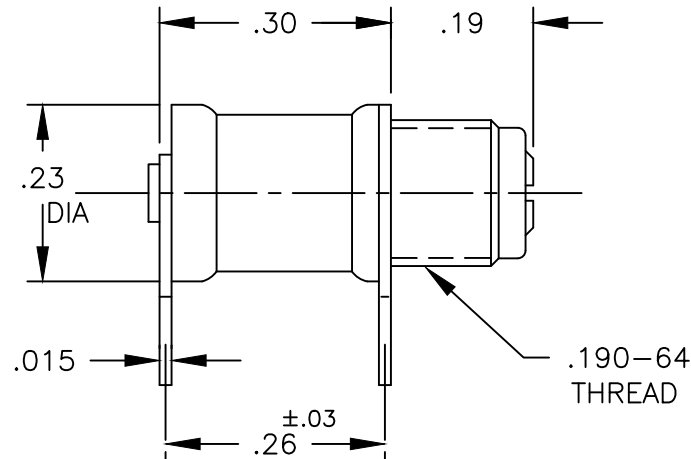

NOTES:

1. CAPACITANCE RANGE: 0.6 TO 6.0pF
2. DC WORKING VOLTAGE : 250 VDC
3. DC WITHSTANDING VOLTAGE : 500 VDC
4. Q FACTOR AT 100 MHz : 5000
5. INSULATION RESISTANCE: 10^6 MEGOHMS AT 25°C
6. TEMPERATURE COEFFICIENT: 0 ± 50 PPM/°C.
7. OPERATING TEMPERATURE: -65°C TO +125°C
8. TUNING TORQUE: 0.5 TO 5.0 IN-OZ
9. ROTATIONAL LIFE: 10,000 TURNS
10. VIBRATION: 50g AT 10-2000 Hz
11. SHOCK: 1500g, 0.5 MILLISECS.
12. SEAL: 40 PSI

TOLERANCES (EXCEPT AS NOTED)		KNOWLES PRECISION DEVICES 2777 RT 20E CAZENOVIA, NY			
DECIMAL XXX±.005 XX ±.016		SCALE 4 : 1	DRAWN BY M.IMBIMBO		
			APPROVED BY M.IMBIMBO		
FRACTIONAL —	TITLE OUTLINE DWG. KB6				
ANGULAR —	DATE 9/28/21	DRAWING NUMBER 71,604 REV. A			