

4

3

2

1

ELECTRICAL**SPECIFICATIONS**

FREQUENCY RANGE: _____ DC - 18 GHz

ATTENUATION: _____ SEE TABLE

ATTENUATION DEVIATION TOLERANCE: _____ SEE TABLE

VSWR: (MAX.): _____

DC - 4 GHz	1.15:1
4 - 12.4 GHz	1.25:1
12.4 - 18 GHz	1.35:1

IMPEDANCE: _____ 50 OHMS

TEMPERATURE RANGE (°C) _____ -65 TO +125 OPERATING
+150° STORAGEPOWER (AVG) _____ 5 WATTS**
POWER (PEAK) (<5 µSEC PW, <0.15% DUTY CYCLE) 500 WATTS
POWER DERATES LINEARLY FROM +25°C TO 10% @ +125°CMECHANICAL SPECIFICATIONS****MATERIALS** (CONNECTORS PER MIL-PRF-39012 & MIL-DTL-3933)CENTER CONDUCTOR: BERYLLIUM COPPER PER QQ-C-530, ASTM B196,
ASTM-B197 ALLOYS C17200 OR C17300 PER MIL-PRF-39012.GOLD
PLATED PER MIL-PRF-39012OUTER CONDUCTOR: STAINLESS STEEL, CORROSION RESISTANT PER
ASTM A484 & A582, CLASS 303, COND. A. PASSIVATED PER ASTM A380



DIELECTRIC: TEFLON PER ASTM D1710.

HOUSING: ALUMINUM (May be one of several QQ-A-XXX or ASTM standards)



RESISTOR SUBSTRATE AIN OR ALUMINUM OXIDE.RESISTOR: PROPRIETARY
THIN FILM HYBRID WITH PROTECTIVE SIO COATING.**MARKING INSTRUCTIONS**

PART LOOKS LIKE PRODUCT IMAGE ABOVE.
PART MARKING ORIENTATION AND FORMAT AS SHOWN.
USE SCRIBING LASER WITH MULTI PASS FOR CHARACTERS.
WHITE/SILVER CHARACTERS ON BLACK ANODIZE ALUMINUM.
OPT - WHITE SILVER EPOXY INK.
MARKING TO BE AS LARGE AS POSSIBLE BE, CLEAR, READABLE, AND
A WHITE COLOR.
-dB VALUE TO BE ONE OR TWO DIGIT NUMBER AS SPECIFIED ON WORK
ORDER.

DASH NO.	NOM DB	MAX DEV.
-01	1	±0.3
-02	2	±0.3
-03	3	±0.3
-04	4	±0.3
-05	5	±0.3
-06	6	±0.3
-07	7	±0.5
-08	8	±0.5
-09	9	±0.5
-10	10	±0.5
-11	11	±0.5
-12	12	±0.5
-15	15	±0.5
-20	20	±0.5
-30	30	±0.75
-40	40	±1.25

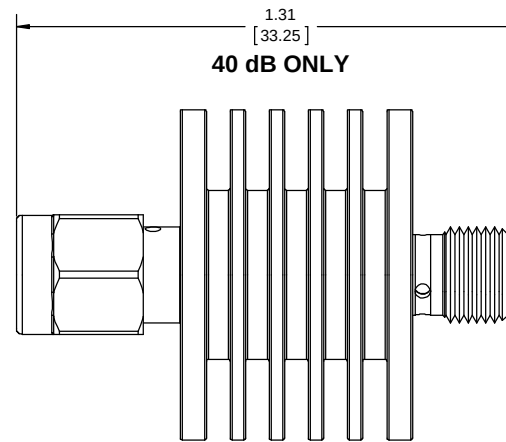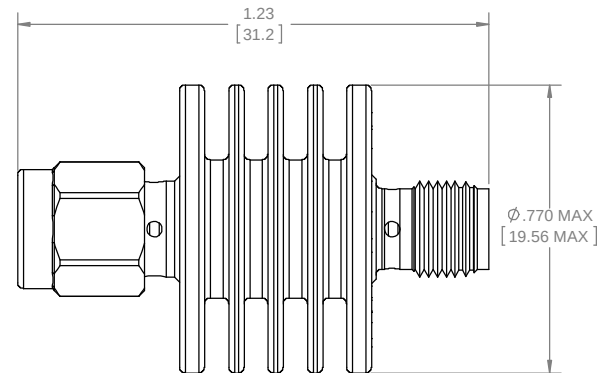

REVISIONS				
REV	DESCRIPTION	ECO #	DATE	APPROVED
J	REDRAWN IN SOLIDWORKS;INCLUDED MARKING	14-231	6/10/14	T.KUHN
K	ADDED -40 TO TABLE	14-244	7/01/14	T.KUHN

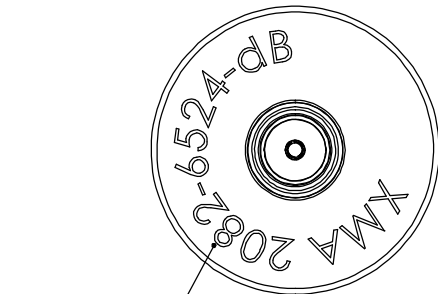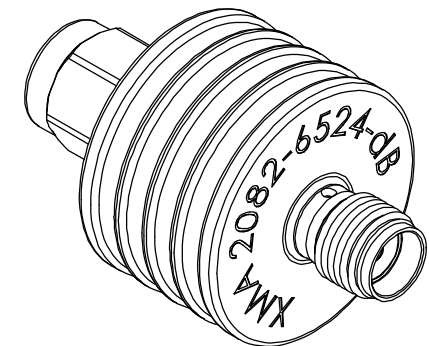MARKING
SEE NOTES

01 - 30 dB	40 dB	PART NUMBER	DESCRIPTION	ITEM NO.
		2082-6524-dB	ATTENUATOR, SMA, AIR COOLED, 5W, UP TO 18GHz	
-	1	TA-2082-6524-40U	ASSY, ATTENUATOR, SMA, AIR COOLED, 5W, UP TO 18GHz, UNMARKED	
1	-	TA-2082-6524-dBU	ASSY, ATTENUATOR, SMA, AIR COOLED, 5W, UP TO 18GHz, UNMARKED	

DRAWING PRACTICES PER ANSI-Y-14.5 MIL-STD-100 & 1000	UNLESS OTHERWISE SPECIFIED TOLERANCES IN: DECIMALS INCH (MM) .X" .05" [1.27] .XX" .03" [.76] .XXX" .010" [.25]
DIMENSIONS ARE IN INCHES AND APPLY BEFORE/AFTER PROCESSING	ANGLES ±0°30' REMOVE ALL BURRS/SHARP W/ BREAK / R OF .003" TO .0005" UNLESS OTHERWISE NOTED DIAS CONCENTRIC <.003 T.I.R.
SURFACE ROUGHNESS INCHES 63	DO NOT SCALE PRINT
FINISH: SEE NOTES	
MATERIAL: SEE NOTES	
NOTE: THIS DRAWING INCORPORATES THIRD ANGLE PROJECTION.	
INTERPRET LAW ANSI Y14.5-1982	

DRAWN McCORMICK6/10/14	DATE 6/10/14
CHECKED McCORMICK6/10/14	DATE 6/10/14
ENG APPR. T.KUHN	DATE 6/10/14

THESE DRAWINGS AND
SPECIFICATIONS ARE THE PROPERTY
OF XMA CORP. OR OMNI SPECTRA
AND SHALL NOT BE REPRODUCED,
COPIED NOR USED IN WHOLE OR IN
PART AS A BASIS FOR THE
MANUFACTURE OR SALE OF OTHER
ITEMS WITHOUT THE EXPRESS
WRITTEN PERMISSION OF XMA CORP.

Phone:603-222-2256 Fax:603-222-2259 150 Dow Street, Manchester, NH 03103			
TITLE ATTENUATOR, SMA, AIR COOLED, 5W, UP TO 18GHz			
SIZE C	CAGE CODE 3HT76	DRAWING NUMBER 2082-6524-dB	REV K
SCALE	PLATED AREA SQ. IN	SHEET 1 of 1	

4

3

2

1

TEMPLATE REV A