



VCO R3208SMUA5CR




rev_0

initial rev

	<u>MIN</u>	<u>TYP</u>	<u>MAX</u>	<u>UNITS</u>	<u>NOTES</u>	<u>Production Test</u>	<u>First Article Test</u>
Frequency Range		3208		MHz	1	..	..
Tuning Voltage	0.5		4.5	V	1	..	..
Modulation Sensitivity		8		MHz/V	1,7	..	..
Operates with Vtune = 0V					1	..	..
Output Power	4	6	8	dBm	1	..	..
Phase Noise @							
1 KHz Offset		-92	-87	dBc/Hz	1	..	..
10 KHz Offset		-117	-112	dBc/Hz	1	..	..
100 KHz Offset		-137	-132	dBc/Hz	1	..	..
1 MHz Offset		-157	-152	dBc/Hz	1	..	..
10 MHz Offset		-164	-159	dBc/Hz	1	..	..
Pushing		0.5	1	MHz/V	3	..	..
Pulling (12dB RL, any phase)		1	2	MHz _{p-p}	3	..	..
Modulation Bandwidth		5		MHz	4	..	..
Tuning Port Capacitance		28		pF	2	..	..
Harmonics		-14	-8	dBc	3	..	..
Vcc		5.0		V		..	..
Icc		27		mA	1	..	..
Operating Temperature	-40		+85	C	3	..	..
Package		SMUA			6	..	..
LxW		0.500		inch sq.	5	..	..
Height		0.220		inch	5	..	..

Notes


1. Tested in production, and guaranteed
2. Per current design, not a tested parameter
3. Sample tested from production lot
4. Not a tested or guaranteed design goal
5. By inspection
6. RoHS compliant
7. Design goal subject to change

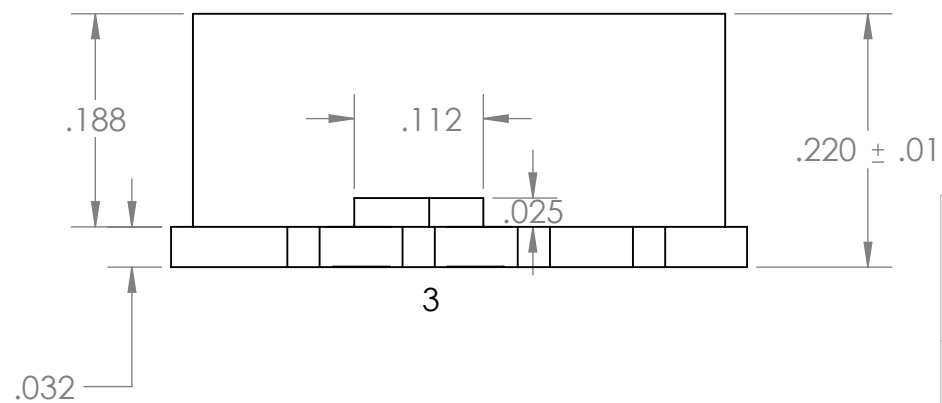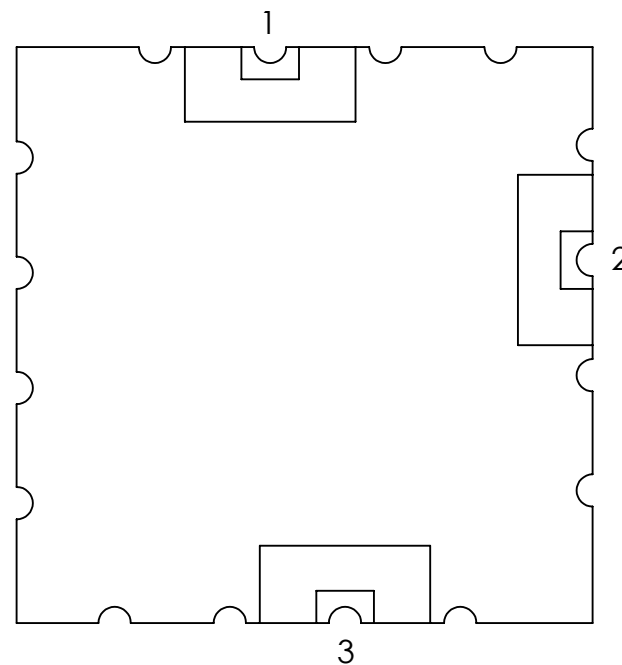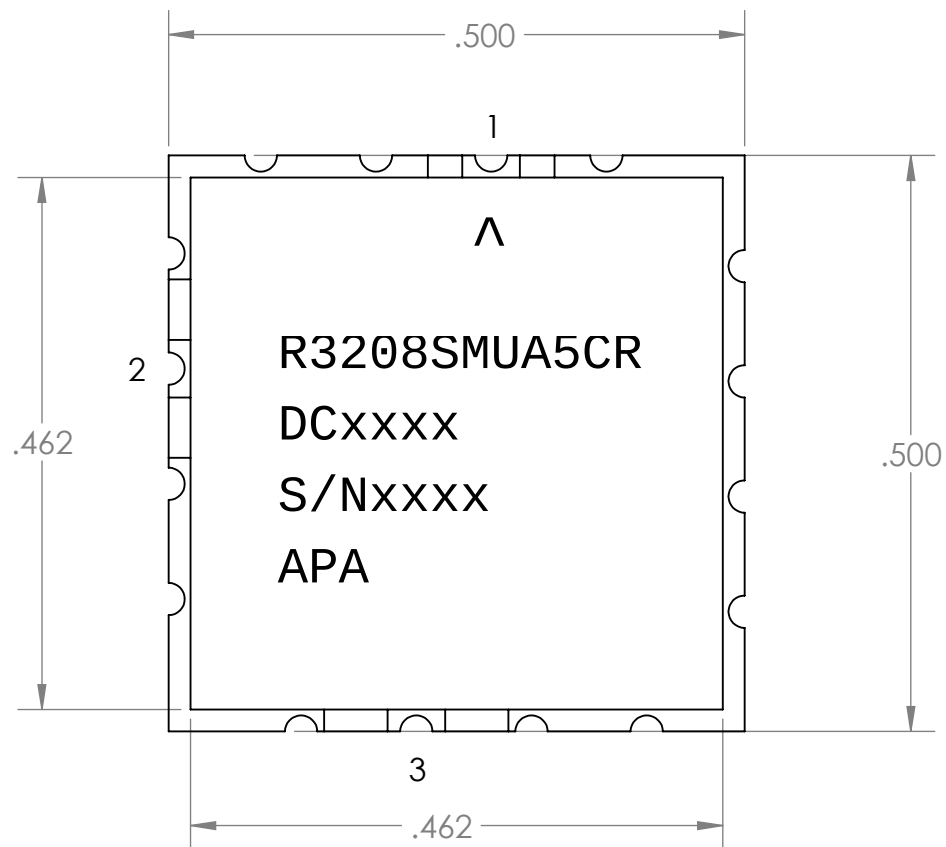


CONTACT ASSIGNMENTS	
1.	RF OUT
2.	VCC
3.	V-TUNE
ALL OTHER CONTACTS ARE GROUND	



APA Wireless Technologies	TITLE:		
DRAWN	NAME	DATE	SMUA PACKAGE
	Stefan Babulal	2/20/2017	
COMMENTS: All dimensions are in inches. Tolerances ± 0.005 unless otherwise noted	SIZE	DWG. NO.	REV
	A	1	
SCALE: 6:1		unit: inch	SHEET 1 OF 2

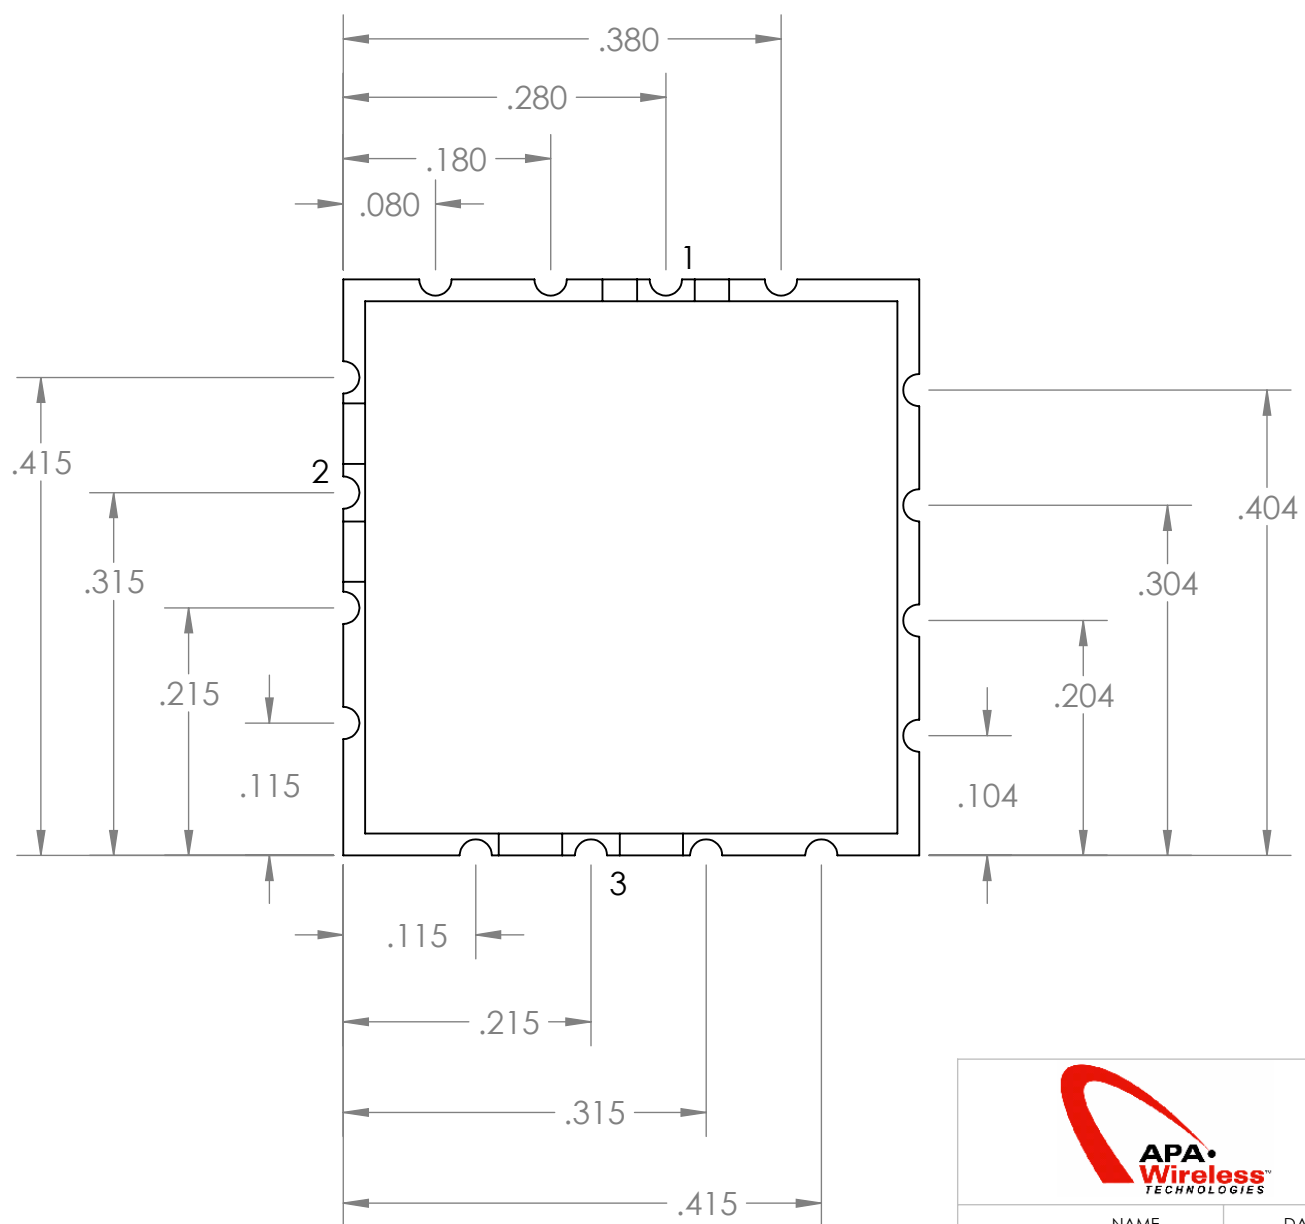

CONTACT DIMENSIONS

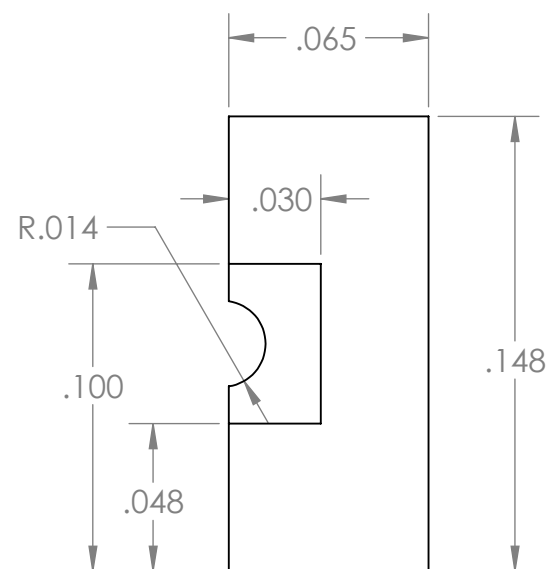

Scale: 16:1




DRAWN NAME Stefan Babulal DATE 2/20/2017

COMMENTS:
All dimensions are in inches.
Tolerances ± 0.005 unless otherwise noted


TITLE:
SMUA PACKAGE

SIZE A	DWG. NO. 1	REV
------------------	---------------	-----


SCALE: 6:1	unit: inch	SHEET 2 OF 2
------------	------------	--------------

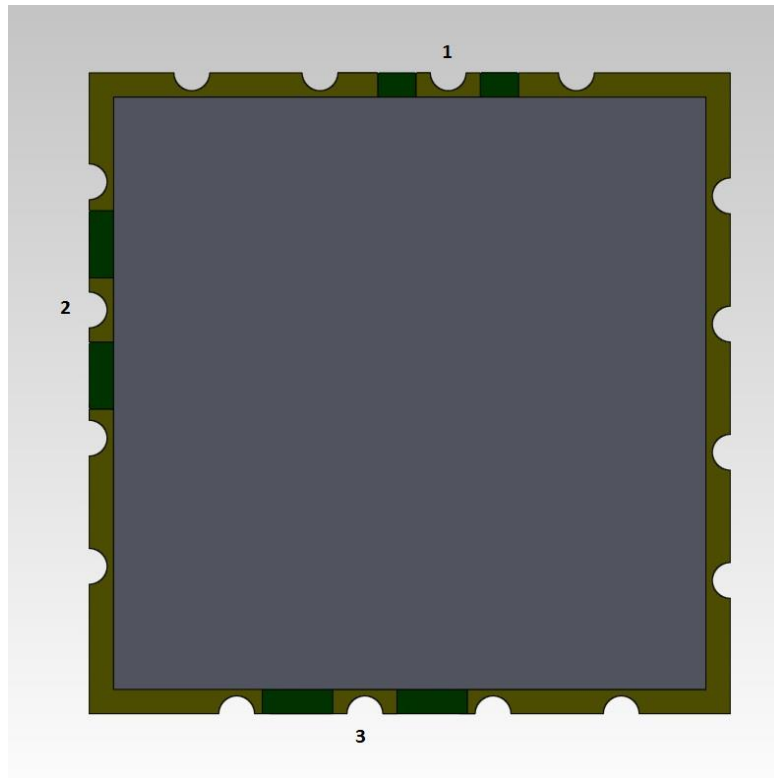


TOP VIEW

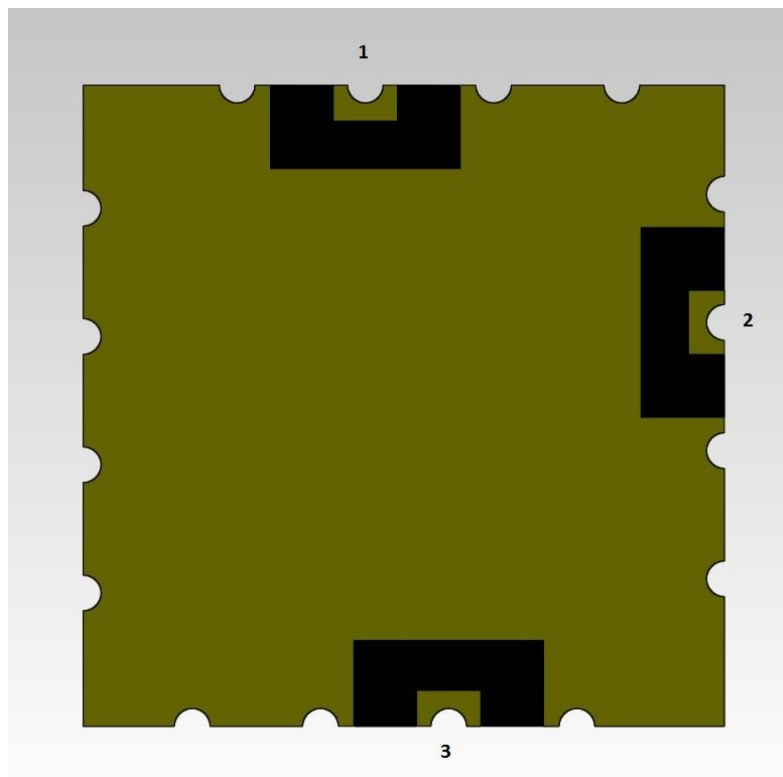

BOTTOM VIEW

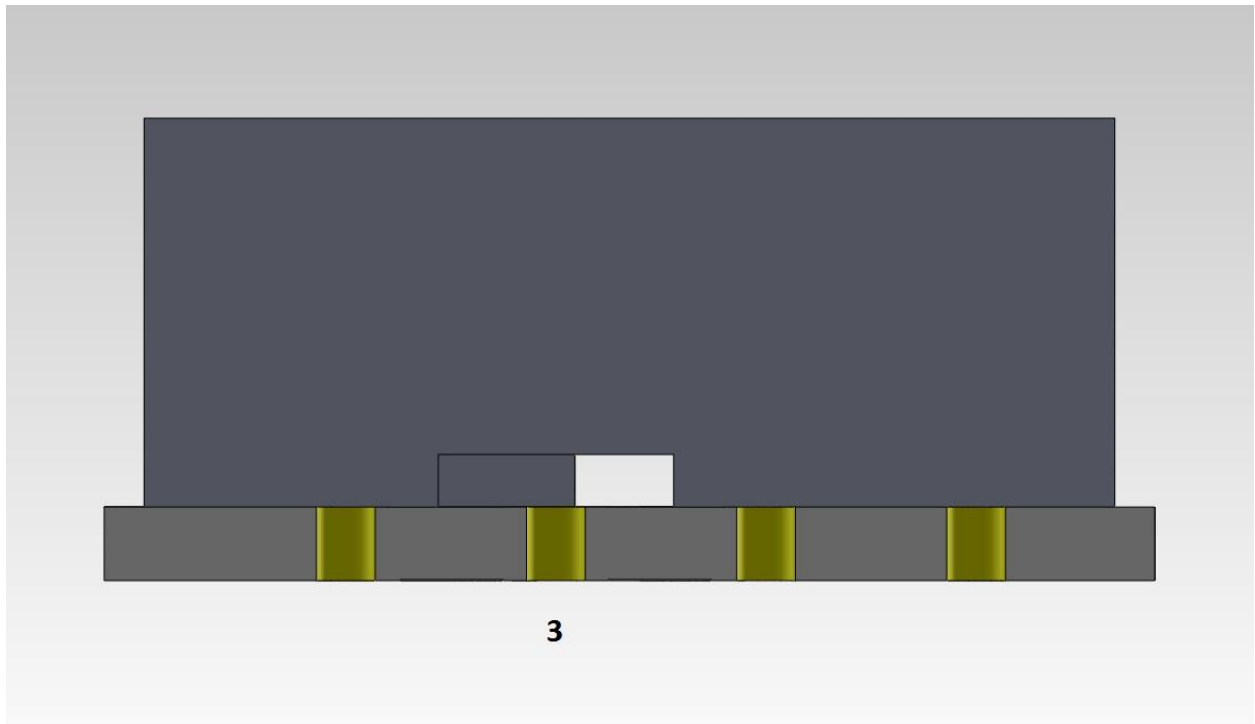

SIDE VIEW

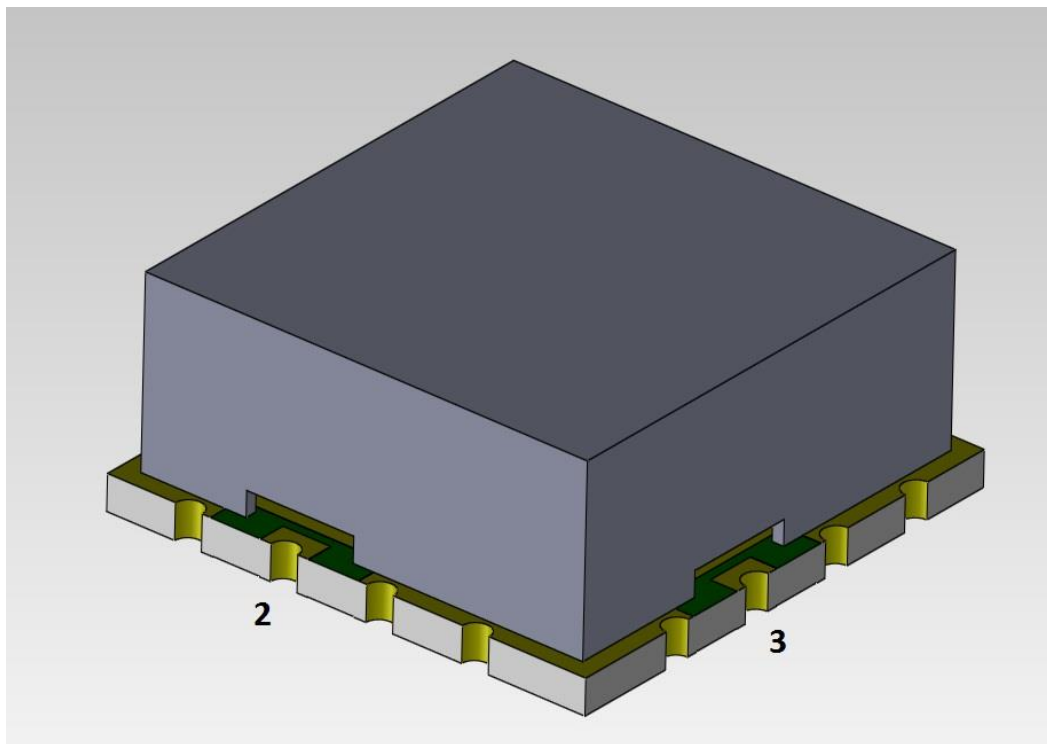

ISOMETRIC VIEW