


1203-013-N000

7/16-28 UNEF-2B THREAD

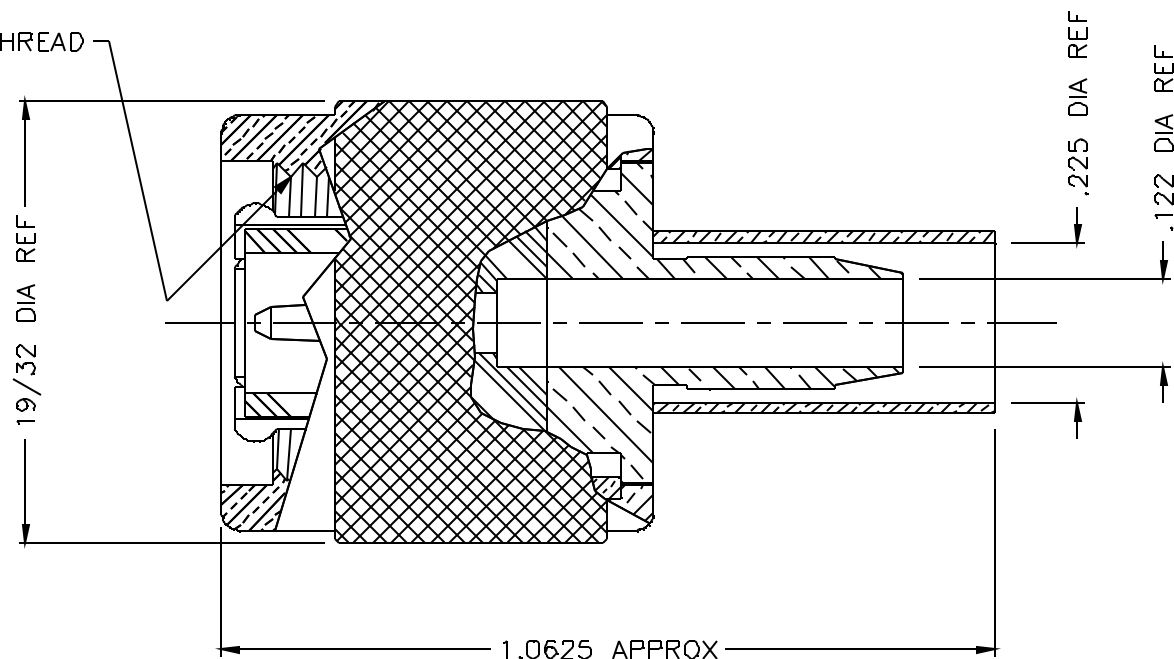

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY, COUPLING NUT- BRASS PER ASTM B16
CONTACT - BRASS PER ASTM B16.
GASKET - SILICONE RUBBER PER ZZ-R-765
INSULATOR - TEFLON PER ASTM D1710
CRIMP SLEEVE - D.H.P. COPPER CDA ALLOY 122
3. FINISHES: BODY, COUPLING NUT - NICKEL PLATE PER QQ-N-290
CONTACT - GOLD PLATE PER MIL-G-45204
CRIMP SLEEVE - SULFAMATE NICKEL PLATE PER MIL-P-27418

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = $\pm .005$, 2 PLACES = $\pm .02$, ANGLES = $\pm 1/2^\circ$, SURFACE FINISH = 63

B	REVISED	5/1/00
A	REVISED	11/15/96
-	OUTLINE	2-23-96
ALT.	REVISIONS	DATE

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915				
TITLE: "TNC" CRIMP PLUG FOR RG-55, 142, 223/U CABLE				
Drawn by MR	Scale 4/1	Ckd. by	Engr Appd	FILE NAME: 1203031N000-000T
2-23-96				
CODE IDENT.-00795		1203-013-N000		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.